



Scavenger® Head Drywall Screw

Interior Wood

GRABBER
CONSTRUCTION PRODUCTS

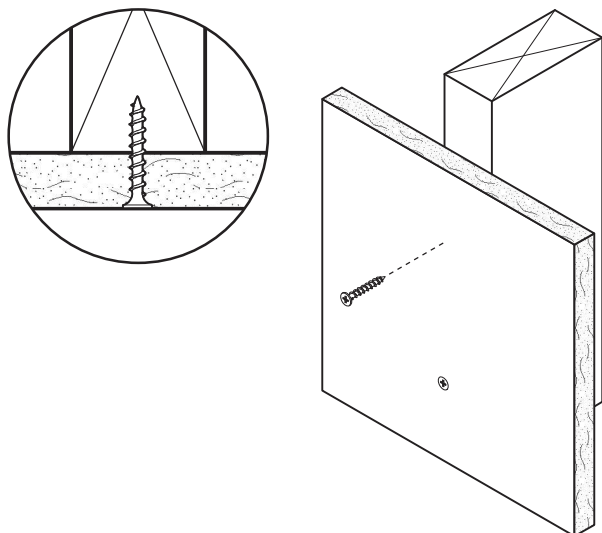

Description Attaches gypsum board to wood.

Specifications

Size | Gauge: #6 and #7
Length: 1 in. to 2 in.
Head Type: Scavenger®
Recess Type: #2 Phillips
Thread Type: Coarse
Thread Length: Varies by item.
 Refer to the thread length reference section for specific dimensions.

Finish: Phosphate
Quality Assurance: Grabber® fasteners are manufactured in ISO 9001 and ISO 14001 certified and approved factories.
LEED Reporting: The post-consumer recycled steel content is 25%.
Compliance: The fasteners comply with ASTM C1002 performance requirements.

Applications

- 3/8 in., 1/2 in., and 5/8 in. single-layer gypsum board to wood studs
- 1/2 in. and 5/8 in. double-layer gypsum board to wood studs
- Sheathing and insulation board to wood studs

Installation

- Use a standard screw gun with a depth-sensitive nose piece. Suggested screw gun specification for optimal performance: sizes #6 and #7, up to 4,000 RPM.
- For gypsum board, the Scavenger® head is fully seated when the screw is below the surface of the wallboard, in accordance with ASTM C1002.
- The fastener should penetrate into the wood at least 5/8 in., in accordance with AWC-NDS for wood construction.
- Overdriving may result in failure of the fastener or failure of the gypsum board.

Features

- Superior holding power and ease of penetration.
- A coarse thread screw for general interior applications into wood.
- Grabber's #2 Phillips is a precision recess designed for better bit engagement, resulting in less wobble or strip-out.
- Extra-sharp, 23° Grabber® point designed to penetrate quickly and easily.
- The unique Scavenger® double bugle head design reduces paper burrs.

Scavenger® Head Drywall Screw

Interior Wood


GRABBER®

CONSTRUCTION PRODUCTS

Standard Corrosion Test Results

| Finish | Test | Standard/Protocol | Results |
|-----------|------------|-------------------|----------------------|
| Phosphate | Salt Spray | ASTM B117 | 24 hrs., no red rust |

Note: Salt Spray Testing (SST) results are not intended to predict corrosion in real-world environments. The ASTM B117 standard for SST is recognized industry-wide as an effective tool for comparing different metals and different metal coatings in a tightly controlled, highly corrosive environment for specific periods of time. For more information about corrosion resistance, refer to Grabber's Coatings and Corrosion Resistance Classifications in the Technical Data section of Grabber Fastener Solutions, PG1000. Consult with a corrosion specialist or the architect or engineer of record for detailed guidance and recommendations specific to your project.

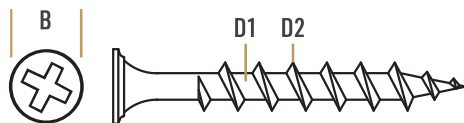

Product Dimensions

| Size | B Head Dia. | Recess | D1 Minor Dia. | D2 Major Dia. | TPI ¹ |
|------|-------------|-------------|---------------|---------------|------------------|
| #6 | 0.325 in. | #2 Phillips | 0.089 in. | 0.138 in. | 8 |
| #7 | 0.325 in. | #2 Phillips | 0.100 in. | 0.151 in. | 8 |

¹TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.

Thread Length: Dimensions vary by item. Consult the thread length reference section at the back of the catalog for item-specific details.

Ordering Information and Product Options

| Item No. | Size | Recess | Head Dia. | TPI ¹ | Quantity | Weight | Special Features |
|------------------|---------------|-------------|-----------|------------------|----------|--------|------------------|
| Phosphate | | | | | | | |
| 108 | 6 x 1 in. | #2 Phillips | 0.325 in. | 8 | 10,000 | 29 lb. | |
| 308 | 6 x 1 1/4 in. | #2 Phillips | 0.325 in. | 8 | 8,000 | 29 lb. | |
| 408 | 6 x 1 5/8 in. | #2 Phillips | 0.325 in. | 8 | 5,000 | 24 lb. | |
| 508 | 7 x 2 in. | #2 Phillips | 0.325 in. | 8 | 3,500 | 23 lb. | |
| C308 | 6 x 1 1/4 in. | #2 Phillips | 0.325 in. | 8 | 1,000 | 5 lb. | Collated |
| C408 | 6 x 1 5/8 in. | #2 Phillips | 0.325 in. | 8 | 1,000 | 5 lb. | |

¹TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.

Note: Product availability is subject to change without prior notice and the availability of products may differ from what is printed in literature and displayed on our website. The items listed are bulk size. Most are also available in smaller packages such as 5 lb. and 1 lb. Contact your local Grabber Branch or GrabberPro for more information.

Scavenger® Head Drywall Screw
PS1028 USA-ENG/Rev. 2-26

Grabber Construction Products, Inc.
3125 W. Executive Pkwy., Suite 200
Lehi, UT 84048

(800) 477-8876 | GrabberPro.com

SAFETY FIRST: Wear appropriate personal protective equipment. Read applicable SDS and literature before handling and installation.

TECHNICAL INFORMATION: Technical information contained herein is furnished without charge or obligation and is given and accepted at the recipient's sole risk. Because conditions of use may vary and are beyond our control, Grabber Construction Products makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with uses of any product described herein. Grabber Construction Products reserves the right to modify this document without prior notice.

© 2026 Grabber Construction Products, Inc. | All rights reserved | Printed in U.S.A.
The trademarks Grabber, Scavenger, and Stylized G on Grabber Fasteners, are trademarks of Grabber Construction Products, Inc.

