

# **Lag-Master Structural Wood Screw**

Wood to Wood



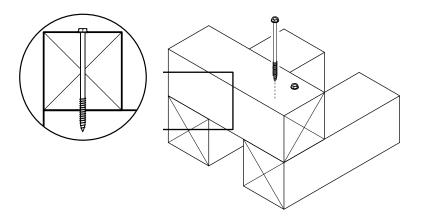



**Description** 

Multi-purpose wood fastener for general wood construction, laminated beams, under-deck connections, trusses, and dimensional lumber.

### **Specifications**

Size | Gauge: #14 **Length:** 2 1/2 in. to 6 in. Head Type: Hex Head Recess Type: 3/8 in. Hex Thread Type: Coarse

Finish: Mechanically galvanized

**Quality Assurance:** Grabber® fasteners are manufactured in ISO 9001 and ISO 14001 certified and approved factories.

**LEED Reporting:** The post-consumer recycled steel content is 25%.

Compliance: ICC ESR-3531; ASTM B695

Class 55.

# **Applications**

- General wood-to-wood construction
- Decks, docks, and boardwalks
- Under-deck connections

# Rim-to-joist connections

- Retaining walls
- Laminated beams

# Installation

- Use a standard screw gun with a depth-sensitive nose piece. Suggested screw gun specification for optimal performance: size #14, up to 2,500 RPM.
- Use of an impact driver is acceptable.
- The head is fully seated when the bearing surface of the head is flush with the work surface.
- The fastener should penetrate the wood at least 1 1/8 in., in accordance with AWC-NDS for wood construction.
- Overdriving may result in failure of the fastener.

#### **Features**

- 3/8 in. hex washer head provides ultimate torque and higher loadbearing capability in structural woodto-wood applications.
- DrawTite shank pulls wood members together, rather than forcing them apart, as the fastener drives in and seats.
- Mechanically galvanized against corrosion to ASTM B695 Class 55.
- Grabber's galvanized coating is ACQ compliant.
- The Type 17 point starts and drives into most common wood species without predrilling.

# **Lag-Master Structural Wood Screw**

Wood to Wood



Standard Corrosion **Test Results** 

| Finish                     | Test                                | Standard/Protocol | Results  |
|----------------------------|-------------------------------------|-------------------|----------|
| Mechanically<br>Galvanized | Coating Thickness<br>Classification | ASTM B695         | Class 55 |



### **Product Dimensions**

| Size | B Head Dia. | Recess      | D1 Minor Dia. | D2 Major Dia. | TPI <sup>1</sup> |
|------|-------------|-------------|---------------|---------------|------------------|
| #14  | 0.500 in.   | 3/8 in. Hex | 0.185 in.     | 0.242 in.     | 10               |

<sup>&</sup>lt;sup>1</sup>TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.

# **Ordering Information and Product Options**

| Item No.   | Size           | Recess     | Head<br>Diameter | TPI <sup>1</sup> | Quantity | Weight | Special Features            |
|------------|----------------|------------|------------------|------------------|----------|--------|-----------------------------|
| Galvanized |                |            |                  |                  |          |        |                             |
| GLM212     | 14 x 2 1/2 in. | 3/8 in Hex | 0.500 in.        | 10               | 500      | 29 lb. |                             |
| GLM300     | 14 x 3 in.     | 3/8 in Hex | 0.500 in.        | 10               | 500      | 30 lb. |                             |
| GLM312     | 14 x 3 1/2 in. | 3/8 in Hex | 0.500 in.        | 10               | 500      | 32 lb. |                             |
| GLM400     | 14 x 4 in.     | 3/8 in Hex | 0.500 in.        | 10               | 500      | 33 lb. |                             |
| GLM412     | 14 x 4 1/2 in. | 3/8 in Hex | 0.500 in.        | 10               | 500      | 35 lb. | ICC ESR-3531, Type 17 point |
| GLM478     | 14 x 4 7/8 in. | 3/8 in Hex | 0.500 in.        | 10               | 500      | 37 lb. |                             |
| GLM500     | 14 x 5 in.     | 3/8 in Hex | 0.500 in.        | 10               | 500      | 38 lb. |                             |
| GLM578     | 14 x 5 7/8 in. | 3/8 in Hex | 0.500 in.        | 10               | 500      | 40 lb. |                             |
| GLM600     | 14 x 6 in.     | 3/8 in Hex | 0.500 in.        | 10               | 500      | 41 lb. |                             |

<sup>1</sup>TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.

Note: Product availability is subject to change without prior notice and the availability of products may differ from what is printed in literature and displayed on our website. The items listed are bulk size. Most are also available in smaller packages such as 5 lb. and 1 lb. Contact your local Grabber Branch or Grabber Pro for more information.

Lag-Master Structural Wood Screw PS1037 USA-ENG/Rev. 02-25

GRABBER CONSTRUCTION PRODUCTS, INC. 5255 W 11000 N., STE 100 HIGHLAND, UT 84003

(800) 477-8876 | GrabberPro.com

SAFETY FIRST: Wear appropriate personal protective equipment. Read applicable SDS and literature before handling and installation.

**TECHNICAL INFORMATION:** Technical information contained herein is furnished without charge or obligation and is given and accepted at the recipient's sole risk. Because conditions of use may vary and are  $beyond\ our\ control,\ Grabber\ Construction\ Products\ makes\ no\ representation\ about,\ and\ is\ not\ responsible$ or liable for, the accuracy or reliability of data associated with uses of any product described herein. Grabber Construction Products reserves the right to modify this document without prior notice.





© 2025 Grabber Construction Products, Inc. | All rights reserved | Printed in U.S.A. The trademarks Grabber, and Stylized G on Grabber Fasteners, are trademarks of Grabber Construction Products, Inc.