

Acoustical Eye Lag Acoustical Wire to Light-Gauge Steel



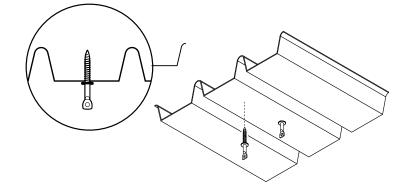



Description	Attaches hanger wire to light-gauge steel.					
Specifications	Size Gauge: 1/4 in. Length: 2 7/8 in. Head Type: Eye Lag Recess Type: n/a Thread Type: Fine, Single Lead Finish: Clear Zinc	Quality Assurance: Grabber [®] fasteners are manufactured in ISO 9001 and ISO 14001 certified and approved factories. LEED Reporting: The post-consumer recycled steel content is 25%.				
Applications	 Attaches hanger wire to light-gauge steel or wooden ceiling joists 					
Installation	 Use a standard screw gun with Grabber's Eye Lag installation tool (ELAT). Suggested screw gun specification for optimal performance: up to 4,000 RPM. The fastener must penetrate beyond the steel three full thread pitches. 	 The fastener should penetrate the wood at least 1 1/2 in., in accordance with AWC-NDS for wood construction. Overdriving may result in failure of the fastener. 				
Features	 Grabber[®] Eye Lag screws are more evenly heat-treated and tempered, resulting in more consistent and reliable performance. 	 Grabber's extra-sharp point design starts immediately and is much less likely to flop over. 				

Acoustical Eye Lag

Acoustical Wire to Light-Gauge Steel



Standard Corrosion	Finish	Test	S	tandard/Protocol	Results		
Test Results	Clear Zinc	Salt Spray	y A	STM B117	24 hrs., no red rus	t	
	industry-wide ás an e	ffective tool for comparin	g different metals and	rosion in real-world environm different metal coatings in a re, see the Grabber Guide to Co	tightly controlled, highly	corrosive environment for	
Pull-Out Test Data	Size	TPI ²	Steel Gauge	Design Thickness	Tension	Shear	
	u 1 7	1/	25	0.0188 in.	58 lbs.	80 lbs.	
	#14	14	20	0.0346 in.	107 lbs.	199 lbs.	
Sheet Steel Gauges	Gauge No.		Design Thick	ormation about testing performa	Millimeter Equiv		
	25		0.0188 in.	0.0188 in.		0.4775 mm	
	20		0.0346 in.		0.8788 mm		
Product			1111>				
Dimensions	Screw Size	B Eye Diam	eter D1 M	inor Diameter D2 M	lajor Diameter 1	[PI]	

¹TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.

0.180 in.

0.250 in.

14

3/16 in.

Ordering Information and Product Options

1/4 in.

ltem No.	Size	Recess	TPI	Quantity	Weight	Special Features
Clear Zinc						
H-3	1/4 x 2 7/8 in.	Eye Lag Driver	14	1,000	20 lb.	1 1/2 in. Thread length

Acoustical Eye Lag - Light-Gauge Steel PS1038 USA-ENG/Rev. 02-25

GRABBER CONSTRUCTION PRODUCTS, INC. 5255 W 11000 N., STE 100 HIGHLAND, UT 84003

(800) 477-8876 | GrabberPro.com

SAFETY FIRST: We ara ppropriate personal protective equipment. Read applicable SDS and literature before handling and installation.

TECHNICAL INFORMATION: Technical information contained herein is furnished without charge or obligation and is given and accepted at the recipient's sole risk. Because conditions of use may vary and are beyond our control, Grabber Construction Products makes no representation about, and is not responsible

or liable for, the accuracy or reliability of data associated with uses of any product described herein. Grabber Construction Products reserves the right to modify this document without prior notice.

© 2025 Grabber Construction Products, Inc. | All rights reserved | Printed in U.S.A. The trademarks Grabber, and Stylized G on Grabber Fasteners, are trademarks of Grabber Construction Products, Inc.

Ŝℤ 150 9001 CERTIFIED

•	Light-Gauge Steel
, ,	Acoustical Wire to Light-Gauge Steel