
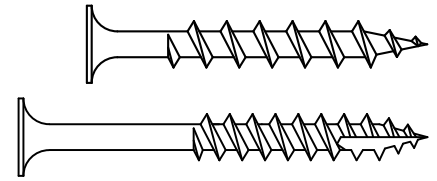
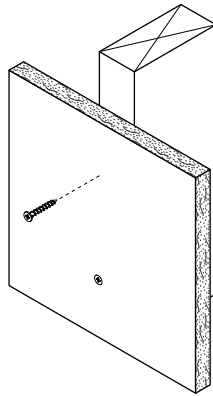


# Bugle Head Drywall Screw

## Gypsum Board to Wood


**GRABBER®**  
CONSTRUCTION PRODUCTS



Phillips



Square




LOX®



Bugle Head



23° Grabber®  
Point



Type 17  
Point

**Description** Attaches gypsum board to wood.

### Specifications

**Size | Gauge:** #6 to #12  
**Length:** 1 in. to 4 1/2 in.  
**Head Type:** Bugle  
**Recess Type:** #2 Phillips, #2 Square, #2 LOX®  
**Thread Type:** Single Lead, Coarse

**Finish:** GrabberGard®, Stainless Steel  
**Quality Assurance:** Grabber® fasteners are manufactured in ISO 9001 and ISO 14001 certified and approved factories.  
**LEED Reporting:** The post-consumer recycled steel content is 25%.  
**Compliance:** The fasteners comply with ASTM C1002 performance requirements.

### Applications

- 3/8 in., 1/2 in., and 5/8 in. single-layer gypsum board-to-wood studs and joists
- 1/2 in. and 5/8 in. double-layer gypsum board-to-wood studs and joists
- Insulation to pressure-treated wood
- OSB or plywood to wood
- Wood-to-wood applications

### Installation

- Use a standard screw gun with a depth-sensitive nose piece. Suggested screw gun specification for optimal performance: sizes #6 to #12, up to 4,000 RPM.
- For gypsum board, the bugle head is fully seated when the screw is below the surface of the wallboard, in accordance with ASTM C1002.
- For wood-to-wood connections, minimum penetration should be 1/2 in., in accordance with AWC-NDS for wood construction.
- Overdriving may result in failure of the fastener or failure of the gypsum board.

### Features

- A coarse thread screw for exterior wood-to-wood applications.
- Extra-sharp, single lead 23° Grabber® point, designed to penetrate quickly and easily.
- GrabberGard® finish is compliant for all types of pressure and preservative treated wood applications.
- Grabber's Pro-Fit #2 Phillips recess is a precision recess designed for better bit engagement, resulting in less wobble or strip-out.
- Stainless steel items can be used in MRI or other applications requiring nonmagnetic parts.


Bugle Head Drywall Screw  
Gypsum Board to Wood



Standard  
Corrosion  
Test Results

Finish	Test	Standard/Protocol	Results
GrabberGard®	Salt Spray	ASTM B117	1,000 hrs., no red rust

Note: Salt Spray Testing (SST) results are not intended to predict corrosion in real-world environments. The ASTM B117 standard for SST is recognized industry-wide as an effective tool for comparing different metals and different metal coatings in a tightly controlled, highly corrosive environment for specific periods of time. For more information about corrosion resistance, refer to Grabber's Coatings and Corrosion Resistance Classifications in the Technical Data section of Grabber Fastener Solutions, PG1000. Consult with a corrosion specialist or the architect or engineer of record for detailed guidance and recommendations specific to your project.



Product  
Dimensions

Size	B Head Dia.	Recess	D1 Minor Dia.	D2 Major Dia.	TPI <sup>1</sup>
#6	0.325 in.	#2 Phillips	0.089 in.	0.138 in.	8
#7	0.321 in.	#2 Phillips	0.100 in.	0.151 in.	8
#8	0.321 in.	#2 Phillips	0.114 in.	0.164 in.	8
	0.325 in.	#2 Phillips	0.104 in.	0.164 in.	8
	0.346 in.	#2 LOX®	0.116 in.	0.164 in.	8
#10	0.343 in.	#2 Phillips	0.132 in.	0.190 in.	8
	0.344 in.	#2 Square	0.132 in.	0.190 in.	8
	0.346 in.	#2 LOX®	0.132 in.	0.190 in.	8
#12	0.346 in.	#2 LOX®	0.153 in.	0.216 in.	8

<sup>1</sup>TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.

Ordering Information and Product Options

Item No.	Size	Recess	Head Diameter	TPI <sup>1</sup>	Quantity	Weight	Special Features
GrabberGard® Gray							
100RG	6 x 1 in.	#2 Phillips	0.325 in.	8	10,000	31 lb.	
200RG	6 x 1 1/8 in.	#2 Phillips	0.325 in.	8	10,000	34 lb.	
300RG	6 x 1 1/4 in.	#2 Phillips	0.325 in.	8	8,000	30 lb.	
400RG	6 x 1 5/8 in.	#2 Phillips	0.325 in.	8	5,000	23 lb.	
500RG	7 x 2 in.	#2 Phillips	0.321 in.	8	3,500	23 lb.	
600RG	7 x 2 1/4 in.	#2 Phillips	0.321 in.	8	3,000	23 lb.	
900RG	8 x 2 1/2 in.	#2 Phillips	0.325 in.	8	2,500	24 lb.	
1100RG	8 x 3 in.	#2 Phillips	0.325 in.	8	2,000	23 lb.	
1200RG	10 x 3 1/2 in.	#2 Phillips	0.343 in.	8	1,000	18 lb.	
1300RG	10 x 4 in.	#2 Phillips	0.343 in.	8	1,000	21 lb.	
C900RG	8 x 2 1/2 in.	#2 Phillips	0.325 in.	8	1,000	5 lb.	Collated

<sup>1</sup>TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.

# Bugle Head Drywall Screw

## Gypsum Board to Wood

**GRABBER®**  
CONSTRUCTION PRODUCTS

### Ordering Information and Product Options (continued)

Item No.	Size	Recess	Head Diameter	TPI <sup>1</sup>	Quantity	Weight	Special Features
GrabberGard® Red							
C400RRG	6 x 1 5/8 in.	#2 Phillips	0.325 in.	8	1,000	5 lb.	Collated
C500RRG	7 x 2 in.	#2 Phillips	0.325 in.	8	1,000	5 lb.	
300RRG	6 x 1 1/4 in.	#2 Phillips	0.325 in.	8	8,000	30 lb.	
400RRG	6 x 1 5/8 in.	#2 Phillips	0.325 in.	8	5,000	23 lb.	
500RRG	7 x 2 in.	#2 Phillips	0.321 in.	8	3,500	23 lb.	
900RRG	8 x 2 1/2 in.	#2 Phillips	0.321 in.	8	2,500	24 lb.	
1100RRG	8 x 3 in.	#2 Phillips	0.321 in.	8	2,000	23 lb.	
1200RRG	10 x 3 1/2 in.	#2 Phillips	0.321 in.	8	1,000	18 lb.	
1300RRG	10 x 4 in.	#2 Phillips	0.321 in.	8	1,000	21 lb.	
302 Stainless Steel							
10100SSQ	10 x 1 in.	#2 Square	0.344 in.	8	7,000	37 lb.	Type 17 point
10150SSQ	10 x 1 1/2 in.	#2 Square	0.344 in.	8	4,000	32 lb.	
10200SSQ	10 x 2 in.	#2 Square	0.344 in.	8	3,500	37 lb.	
10250SSQ	10 x 2 1/2 in.	#2 Square	0.344 in.	8	2,500	31 lb.	
10300SSQ	10 x 3 in.	#2 Square	0.344 in.	8	2,000	30 lb.	
10200SS	10 x 2 in.	#2 Phillips	0.343 in.	8	3,500	37 lb.	
10250SS	10 x 2 1/2 in.	#2 Phillips	0.343 in.	8	2,500	31 lb.	
10300SS	10 x 3 in.	#2 Phillips	0.343 in.	8	2,000	30 lb.	
305 Stainless Steel							
8300SS305	8 x 1 1/4 in.	#2 Phillips	0.325 in.	8	5,000	25 lb.	Nonmagnetic fastener application
316 Stainless Steel							
B10250L316	10 x 2 1/2 in.	#2 LOX®	0.346 in.	8	2,500	32 lb.	Bucket, Type 17 point
B10300L316	10 x 3 in.	#2 LOX®	0.346 in.	8	1,000	31 lb.	
B12450L316	12 x 4 1/2 in.	#2 LOX®	0.346 in.	8	1,000	23 lb.	
10250L316	10 x 2 1/2 in.	#2 LOX®	0.346 in.	8	2,500	32 lb.	Type 17 point
10300L316	10 x 3 in.	#2 LOX®	0.346 in.	8	2,500	31 lb.	
CB8250L316	8 x 2 1/2 in.	#2 LOX®	0.325 in.	8	1,000	5 lb.	Collated, Type 17 point
CB10250L316	10 x 2 1/2 in.	#2 LOX®	0.346 in.	8	1,000	5 lb.	
C10250L316	10 x 2 1/2 in.	#2 LOX®	0.346 in.	8	1,000	5 lb.	
CB10250L316C	10 x 2 1/2 in.	#2 LOX®	0.346 in.	8	1,000	5 lb.	
CB10250L316I	10 x 2 1/2 in.	#2 LOX®	0.346 in.	8	1,000	5 lb.	
CB10300L316	10 x 3 in.	#2 LOX®	0.346 in.	8	1,000	5 lb.	

<sup>1</sup>TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.

Note: Product availability is subject to change without prior notice and the availability of products may differ from what is printed in literature and displayed on our website. The items listed are bulk size. Most are also available in smaller packages such as 5 lb. and 1 lb. Contact your local Grabber Branch or GrabberPro for more information.

Bugle Head Drywall Screw  
PS1051 USA-ENG/Rev. 02-25

GRABBER CONSTRUCTION PRODUCTS, INC.  
5255 W 11000 N., STE 100  
HIGHLAND, UT 84003

(800) 477-8876 | GrabberPro.com

**SAFETY FIRST:** Wear appropriate personal protective equipment. Read applicable SDS and literature before handling and installation.

**TECHNICAL INFORMATION:** Technical information contained herein is furnished without charge or obligation and is given and accepted at the recipient's sole risk. Because conditions of use may vary and are beyond our control, Grabber Construction Products makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with uses of any product described herein. Grabber Construction Products reserves the right to modify this document without prior notice.

© 2025 Grabber Construction Products, Inc. | All rights reserved | Printed in U.S.A.  
The trademarks Grabber, GrabberGard, LOX, and Stylized G on Grabber Fasteners, are trademarks of Grabber Construction Products, Inc.

