
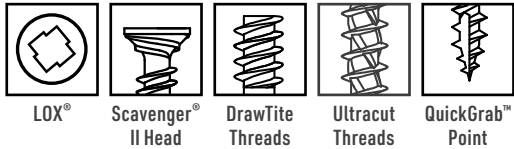
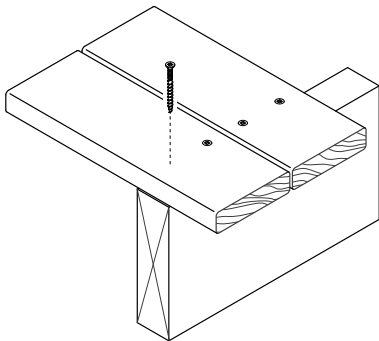


# UltraPro™ Exterior Wood Screw

## Wood to Wood



**Description** General purpose, exterior wood construction, decking and fences.

**Specifications**

**Size | Gauge:** #8 to #10  
**Length:** 1 1/4 in. to 5 in.  
**Head Type:** Scavenger® II  
**Recess Type:** #2 LOX®  
**Thread Type:** UltraCut, Coarse  
**Finish:** GrabberGard® 15 Gold

**Quality Assurance:** Grabber® fasteners are manufactured in ISO 9001 and ISO 14001 certified and approved factories.  
**LEED Reporting:** The post-consumer recycled steel content is 25%.

- Applications**
- Exterior wood construction
  - Decking
  - Fences
  - General purpose construction

- Installation**
- Use a standard screw gun with a depth-sensitive nose piece, drill, or impact driver. Suggested screw gun specification for optimal performance: sizes #8 to #10, up to 4,000 RPM.
  - The flat head is fully seated when the head is flush with the work surface.
  - The fastener should penetrate the wood at least 3/4 in., in accordance with AWC-NDS for wood construction.
  - Overdriving may result in failure of the fastener.

- Features**
- No countersinking required, Scavenger® II spiral self-countersinks.
  - DrawTite threads pull wood members together, creating a tight seal between boards.
  - Extra-sharp UltraCut threads drive faster.
  - The QuickGrab™, Type 17 point starts immediately, allowing you to free up your other hand.
  - Ideal for driving screws at difficult angles.

UltraPro™ Exterior Wood Screw


Wood to Wood



Standard Corrosion Test Results

Finish	Test	Standard/Protocol	Results
GrabberGard® 15	Salt Spray	ASTM B117	1,500 hrs., no red rust

Note: Salt Spray Testing (SST) results are not intended to predict corrosion in real-world environments. The ASTM B117 standard for SST is recognized industry-wide as an effective tool for comparing different metals and different metal coatings in a tightly controlled, highly corrosive environment for specific periods of time. For more information about corrosion resistance, refer to Grabber's Coatings and Corrosion Resistance Classifications in the Technical Data section of Grabber Fastener Solutions, PG1000. Consult with a corrosion specialist or the architect or engineer of record for detailed guidance and recommendations specific to your project.

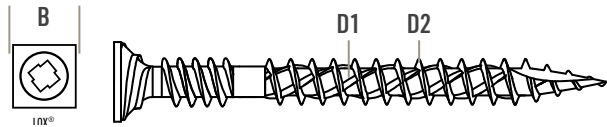

Product Dimensions

Size	B Head Dia.	Recess	D1 Minor Dia.	D2 Major Dia.	TPI <sup>1</sup>
#8	0.343 in.	#2 LOX®	0.098 in.	0.164 in.	12
#9	0.346 in.	#2 LOX®	0.104 in.	0.177 in.	11
#10	0.358 in.	#2 LOX®	0.122 in.	0.190 in.	10

<sup>1</sup>TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.

Ordering Information and Product Options

Item No.	Size	Recess	Head Diameter	TPI <sup>1</sup>	Quantity	Weight	Special Features
GrabberGard® Gold							
U8125G	8 x 1 1/4 in.	#2 LOX®	0.343 in.	12	4,500	30 lb.	UltraPro™, DrawTite threads, UltraCut threads, QuickGrab™ point
U8150G	8 x 1 1/2 in.	#2 LOX®	0.343 in.	12	3,500	32 lb.	
U8200G	8 x 2 in.	#2 LOX®	0.343 in.	12	2,500	33 lb.	
U9250G	9 x 2 1/2 in.	#2 LOX®	0.346 in.	11	2,000	22 lb.	
U10300G	10 x 3 in.	#2 LOX®	0.358 in.	10	1,500	21 lb.	
U10350G	10 x 3 1/2 in.	#2 LOX®	0.358 in.	10	1,500	20 lb.	
U10400G	10 x 4 in.	#2 LOX®	0.358 in.	10	1,000	20 lb.	
U10450G	10 x 4 1/2 in.	#2 LOX®	0.358 in.	10	1,000	20 lb.	
U10500G	10 x 5 in.	#2 LOX®	0.358 in.	10	1,000	20 lb.	

<sup>1</sup>TPI stands for Threads Per Inch. This is a count of the number of threads per inch measured along the length of a fastener.  
Note: Product availability is subject to change without prior notice and the availability of products may differ from what is printed in literature and displayed on our website. The items listed are bulk size. Most are also available in smaller packages such as 5 lb. and 1 lb. Contact your local Grabber Branch or GrabberPro for more information.

