





## 30° Paper Tape Collated Nails

### Wood Framing Nails





**GRABBER®**  
CONSTRUCTION PRODUCTS






Joist Hanger



Clipped and Offset Head with  
Smooth Shank



Clipped and Offset Head with  
Ring Shank

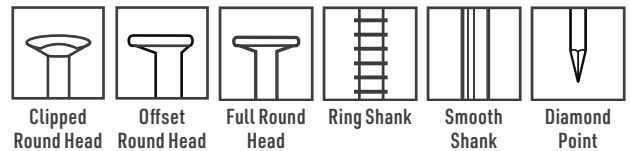

Clipped  
Round Head

Offset  
Round Head

Full Round  
Head

Ring Shank

Smooth  
Shank

Diamond  
Point

#### Description

30° Paper tape collated nails for framing and joist hangers.

#### Specifications

**Size | Gauge:** 0.113 in. to 0.162 in.

**Length:** 1 1/2 in. to 3 1/4 in.

**Head Type:** Clipped, Offset Round, Full Round

**Shank Type:** Ring, Smooth

**Finish:** Bright, Hot-Dip Galvanized

**Quality Assurance:** Grabber® fasteners are manufactured in ISO 9001 and ISO 14001 certified and approved factories.

**LEED Reporting:** The post-consumer recycled steel content is 25%.

**Compliance:** The fasteners comply with ASTM F1667 performance requirements.

# 30° Paper Tape Collated Nails

## Wood Framing Nails



- Applications

- Wood-to-wood framing
  - Joist hanging


General wood construction
- Installation

- Use with any 30° pneumatic nail gun.

The head is fully seated when it is flush with the work surface.
- Features

- Full round head nails provide a larger load-bearing surface for framing and general construction.
  - Clipped and offset round heads allow the nails to sit closer together in the collation, and they take up less space.
  - Smooth shank penetrates the wood easily and smoothly.

- Ring shank nails have robust holding power. As the nail penetrates wood, fibers lock around the grooves in the shank, creating a durable bond.
  - Diamond point is designed to easily drive into wood, and it helps prevent splitting.

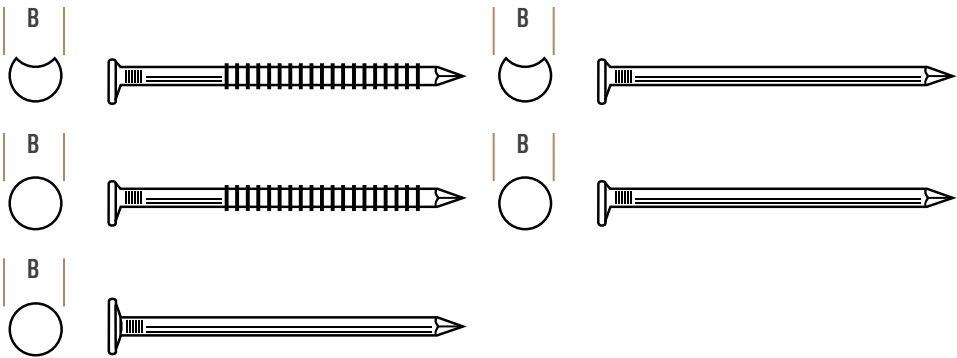

Product Dimensions

B Head Diameter	Wire Diameter	Shank Type
0.266 in.	0.113 in.	Ring
0.266 in.	0.113 in.	Smooth
0.266 in.	0.120 in.	Ring
0.266 in.	0.120 in.	Smooth
0.275 in.	0.131 in.	Ring
0.275 in.	0.131 in.	Smooth
0.287 in.	0.113 in.	Ring
0.287 in.	0.113 in.	Smooth
0.287 in.	0.120 in.	Ring
0.287 in.	0.120 in.	Smooth
0.287 in.	0.131 in.	Smooth
0.287 in.	0.148 in.	Smooth
0.287 in.	0.162 in.	Smooth
0.291 in.	0.131 in.	Smooth

# 30° Paper Tape Collated Nails

## Wood Framing Nails

**GRABBER®**  
CONSTRUCTION PRODUCTS

### Ordering Information and Product Options

Item No.	Length	Head Type	Head Diameter	Wire Diameter	Shank Type	Amount	Weight	Special Features
Bright								
11.5 Gauge								
PT238113RGBR	2 3/8 in.	Offset Round	0.266 in.	0.113 in.	Ring	5,000	35 lb.	
PT238113RGBR2M	2 3/8 in.	Offset Round	0.266 in.	0.113 in.	Ring	2,000	14 lb.	
PT238113BRC	2 3/8 in.	Clipped	0.287 in.	0.113 in.	Smooth	2,000	14 lb.	
PT238113BR	2 3/8 in.	Offset Round	0.266 in.	0.113 in.	Smooth	5,000	14 lb.	
PT238113BR2M	2 3/8 in.	Offset Round	0.266 in.	0.113 in.	Smooth	2,000	6 lb.	
11 Gauge								
PT300120RGBR	3 in.	Offset Round	0.266 in.	0.120 in.	Ring	2,000	20 lb.	
PT300120BR	3 in.	Offset Round	0.266 in.	0.120 in.	Smooth	2,000	20 lb.	
PT300120BRC	3 in.	Clipped	0.287 in.	0.120 in.	Smooth	2,000	20 lb.	
PT314120BRC	3 1/4 in.	Clipped	0.287 in.	0.120 in.	Smooth	2,000	21 lb.	
PT314120BR	3 1/4 in.	Offset Round	0.266 in.	0.120 in.	Smooth	2,000	21 lb.	
PT314120BR2M	3 1/4 in.	Offset Round	0.266 in.	0.120 in.	Smooth	2,000	21 lb.	
10.5 Gauge								
PT112131JHNBR	1 1/2 in.	Round	0.287 in.	0.131 in.	Smooth	2,000	12 lb.	Joist Hanger Nail
PT300131BR	3 in.	Offset Round	0.275 in.	0.131 in.	Smooth	2,500	29 lb.	
PT314131BR	3 1/4 in.	Offset Round	0.275 in.	0.131 in.	Smooth	2,500	31 lb.	
PT314131BRC	3 1/4 in.	Clipped	0.291 in.	0.131 in.	Smooth	2,500	31 lb.	
PT312131BRC	3 1/2 in.	Clipped	0.291 in.	0.131 in.	Smooth	2,500	31 lb.	
9 Gauge								
PT112148JHNBR	1 1/2 in.	Round	0.287 in.	0.148 in.	Smooth	3,000	24 lb.	Joist Hanger Nail
PT212148JHNBR	2 1/2 in.	Round	0.287 in.	0.148 in.	Smooth	3,000	31 lb.	

# 30° Paper Tape Collated Nails

## Wood Framing Nails



### Ordering Information and Product Options (continued)

Item No.	Length	Head Type	Head Diameter	Wire Diameter	Shank Type	Amount	Weight	Special Features
Hot-Dipped Galvanized								
11.5 Gauge								
PT2113RGHDG	2 in.	Offset Round	0.266 in.	0.113 in.	Ring	2,000	12 lb.	
PT200113RGHDGC	2 in.	Clipped	0.287 in.	0.113 in.	Ring	2,000	12 lb.	
PT238113RGHDGC	2 3/8 in.	Clipped	0.287 in.	0.113 in.	Ring	2,000	14 lb.	
PT238113RGHDG	2 3/8 in.	Offset Round	0.266 in.	0.113 in.	Ring	2,000	14 lb.	
PT238113HDG	2 3/8 in.	Offset Round	0.266 in.	0.113 in.	Smooth	5,000	35 lb.	
11 Gauge								
PT238120RGHDGC	2 3/8 in.	Clipped	0.287 in.	0.120 in.	Ring	4,800	43 lb.	
PT300120RGHDGC	3 in.	Clipped	0.287 in.	0.120 in.	Ring	2,000	19 lb.	
PT300120RGHDG	3 in.	Offset Round	0.266 in.	0.120 in.	Ring	2,000	19 lb.	
PT3120HDG	3 in.	Offset Round	0.266 in.	0.120 in.	Smooth	2,000	19 lb.	
PT314120RGHDG	3 1/4 in.	Offset Round	0.266 in.	0.120 in.	Ring	2,000	21 lb.	
10.5 Gauge								
PT212131JHNHDG	2 1/2 in.	Round	0.287 in.	0.131 in.	Smooth	2,500	30 lb.	Joist Hanger Nail
PT3131RGHDG	3 in.	Offset Round	0.275 in.	0.131 in.	Ring	2,000	23 lb.	
PT300131HDGC	3 in.	Clipped	0.291 in.	0.131 in.	Smooth	2,500	30 lb.	
PT3131HDG	3 in.	Offset Round	0.275 in.	0.131 in.	Smooth	2,000	23 lb.	
PT314131HDG	3 1/4 in.	Offset Round	0.275 in.	0.131 in.	Smooth	2,000	25 lb.	
9 Gauge								
PT112148JHNHDG	1 1/2 in.	Round	0.287 in.	0.148 in.	Smooth	3,000	23 lb.	Joist Hanger Nail
PT112148JHNHDGM	1 1/2 in.	Round	0.287 in.	0.148 in.	Smooth	1,000	8 lb.	
PT112148JHNHDG2M	1 1/2 in.	Round	0.287 in.	0.148 in.	Smooth	2,000	16 lb.	
PT212148JHNHDG	2 1/2 in.	Round	0.287 in.	0.148 in.	Smooth	2,500	32 lb.	
8 Gauge								
PT212162JHNHDG	2 1/2 in.	Round	0.287 in.	0.162 in	Smooth	2,000	27 lb.	Joist Hanger Nail

Note: Product availability is subject to change without prior notice, and the availability of products may differ from what is printed in literature and displayed on our website.

30° Paper Tape Collated Nails  
PS1068 USA-ENG/Rev. 05-25

GRABBER CONSTRUCTION PRODUCTS, INC.  
5255 W 11000 N., STE 100  
HIGHLAND, UT 84003

(800) 477-8876 | GrabberPro.com

**SAFETY FIRST:** Wear appropriate personal protective equipment. Read applicable SDS and literature before handling and installation.

**TECHNICAL INFORMATION:** Technical information contained herein is furnished without charge or obligation and is given and accepted at the recipient's sole risk. Because conditions of use may vary and are beyond our control, Grabber Construction Products makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with uses of any product described herein. Grabber Construction Products reserves the right to modify this document without prior notice.

© 2025 Grabber Construction Products, Inc. | All rights reserved | Printed in U.S.A.  
The trademarks Grabber, and Stylized G on Grabber Fasteners, are trademarks of Grabber Construction Products, Inc.

