





28° Wire Strip Collated Nails



Wood Framing Nails

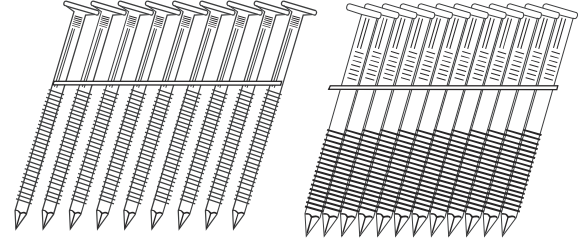

Full Round and Clipped Head with Ring Shank



Clipped, Full Round, and Offset Head with Smooth Shank

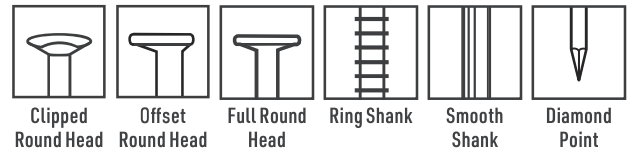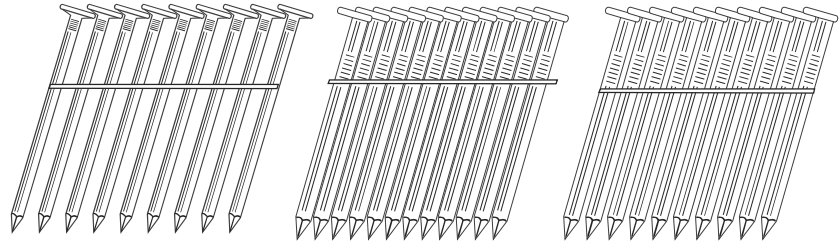

Description 28° Wire strip collated nails for framing.

Specifications

- Size | Gauge:** 0.113 in. to 0.120 in.
- Length:** 2 3/8 in. to 3 1/4 in.
- Head Type:** Clipped, Offset Round, Full Round
- Shank Type:** Ring, Smooth
- Finish:** Bright, Hot-Dip Galvanized

Quality Assurance: Grabber® fasteners are manufactured in ISO 9001 and ISO 14001 certified and approved factories.

LEED Reporting: The post-consumer recycled steel content is 25%.


Compliance: The fasteners comply with ASTM F1667 performance requirements.

28° Wire Strip Collated Nails

Wood Framing Nails



- Applications**
- Wood-to-wood framing
 - General wood utility construction
-
- Installation**
- Use with any 28° pneumatic nail gun.
 - The head is fully seated when it is flush with the work surface.
-
- Features**
- Full round head nails provide a larger load-bearing surface for framing and general construction.
 - Clipped and offset round heads allow the nails to sit closer together in the collation, and they take up less space.
 - Smooth shank penetrates the wood easily and smoothly.
 - Ring shank nails have robust holding power. As the nail penetrates wood, fibers lock around the grooves in the shank, creating a durable bond.
 - Diamond point is designed to easily drive into wood, and it helps prevent splitting.

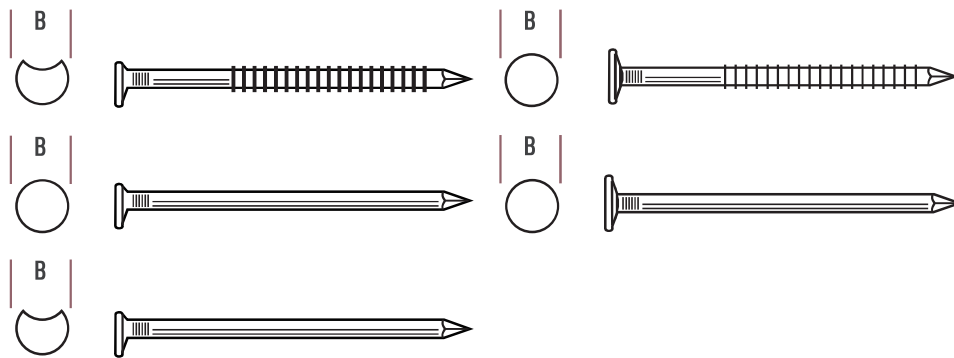

Product Dimensions

B Head Dia.	Wire Dia.	Shank Type
0.266 in.	0.120 in.	Smooth
0.276 in.	0.113 in.	Ring
0.276 in.	0.113 in.	Smooth
0.276 in.	0.120 in.	Ring
0.276 in.	0.120 in.	Smooth
0.287 in.	0.120 in.	Ring
0.287 in.	0.120 in.	Smooth

28° Wire Strip Collated Nails

Wood Framing Nails

GRABBER
CONSTRUCTION PRODUCTS

Ordering Information and Product Options

Item No.	Length	Head Type	Head Dia.	Wire Dia.	Shank Type	Amount	Weight	Special Features
Bright								
11.5 Gauge								
WW238113BR	2 3/8 in.	Offset Round	0.276 in.	0.113 in.	Smooth	2,000	28 lb.	
11 Gauge								
WS300120BR	3 in.	Clipped	0.287 in.	0.120 in.	Smooth	2,000	19 lb.	
WW300120BR	3 in.	Offset Round	0.276 in.	0.120 in.	Smooth	2,000	19 lb.	
WW314120BR	3 1/4 in.	Offset Round	0.266 in.	0.120 in.	Smooth	2,000	20 lb.	
Hot-Dip Galvanized								
11.5 Gauge								
WW238113RGHDG	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	2,000	14 lb.	
11 Gauge								
WW300120RGHDG	3 in.	Offset Round	0.276 in.	0.120 in.	Ring	2,000	19 lb.	

Note: Product availability is subject to change without prior notice, and the availability of products may differ from what is printed in literature and displayed on our website.

28° Wire Strip Collated Nails
PS1069 USA-ENG/Rev. 2-26

Grabber Construction Products, Inc.
3125 W. Executive Pkwy., Suite 200
Lehi, UT 84048

(800) 477-8876 | GrabberPro.com

SAFETY FIRST: Wear appropriate personal protective equipment. Read applicable SDS and literature before handling and installation.

TECHNICAL INFORMATION: Technical information contained herein is furnished without charge or obligation and is given and accepted at the recipient's sole risk. Because conditions of use may vary and are beyond our control, Grabber Construction Products makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with uses of any product described herein. Grabber Construction Products reserves the right to modify this document without prior notice.

© 2026 Grabber Construction Products, Inc. | All rights reserved | Printed in U.S.A.
The trademarks Grabber, and Stylized G on Grabber Fasteners, are trademarks of Grabber Construction Products, Inc.

