






# 15° Wire Coil Collated Nails





Wood Framing, Roofing, Siding, and Pallet Nails






Wood-to-Wood Framing





Wood Siding to Wood Framing



General Wood Utility and Pallet Construction



Asphalt Roof Shingles to Wood Sheathing

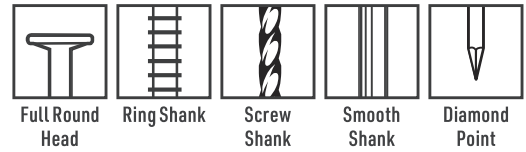

**Description** 15° Wire coil collated nails for framing, roofing, siding, and pallet construction.

**Specifications**

**Size | Gauge:** 0.086 in. to 0.131 in.  
**Length:** 1 in. to 3 1/4 in.  
**Head Type:** Full Round  
**Shank Type:** Ring, Screw, Smooth  
**Finish:** Bright, Electrogalvanized, Hot-Dip Galvanized, Stainless Steel

**Quality Assurance:** Grabber® fasteners are manufactured in ISO 9001 and ISO 14001 certified and approved factories.  
**LEED Reporting:** The post-consumer recycled steel content is 25%.  
**Compliance:** The fasteners comply with ASTM F1667 performance requirements.

- Applications**
- Wood-to-wood framing
  - Wood siding to wood framing
  - Roofing shingles
  - Pallet construction
  - General wood utility construction

- Installation**
- Use with any 15° pneumatic coil nail gun.
  - The head is fully seated when it is flush with the work surface.


# 15° Wire Coil Collated Nails

Wood Framing, Roofing, Siding, and Pallet Nails



## Features

- Full round head nails provide a larger load-bearing surface for framing and general construction.
- Smooth shank penetrates the wood easily and smoothly.
- Ring shank nails have robust holding power. As the nail penetrates wood, fibers lock around the grooves in the shank, creating a durable bond.
- Nails with screw or spiral shanks rotate during installation, increasing pull-out resistance.
- Diamond point is designed to easily drive into wood, and it helps prevent splitting.

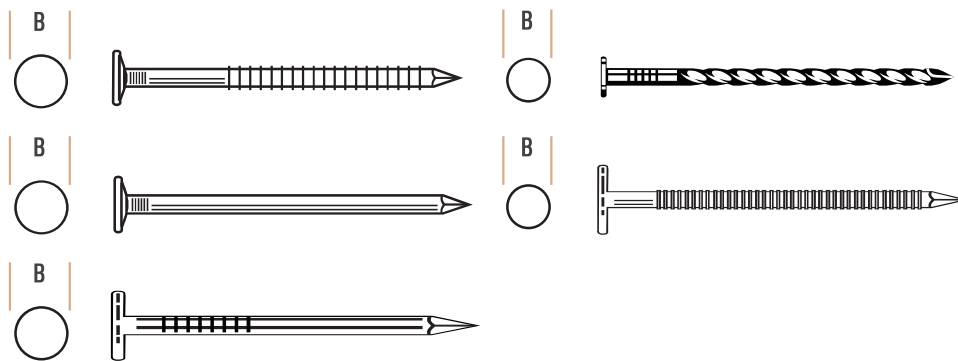

## Product Dimensions

B Head Dia.	Wire Dia.	Shank Type
0.220 in.	0.086 in.	Screw
0.220 in.	0.090 in.	Ring
0.220 in.	0.090 in.	Screw
0.220 in.	0.092 in.	Ring
0.220 in.	0.092 in.	Smooth
0.220 in.	0.093 in.	Ring
0.248 in.	0.099 in.	Smooth
0.260 in.	0.099 in.	Ring
0.260 in.	0.099 in.	Screw
0.276 in.	0.113 in.	Ring
0.276 in.	0.113 in.	Screw
0.276 in.	0.113 in.	Smooth
0.276 in.	0.120 in.	Ring
0.276 in.	0.120 in.	Screw
0.276 in.	0.120 in.	Smooth
0.276 in.	0.131 in.	Ring
0.276 in.	0.131 in.	Screw
0.276 in.	0.131 in.	Smooth
0.325 in.	0.120 in.	Ring
0.325 in.	0.120 in.	Smooth
0.375 in.	0.120 in.	Ring
0.375 in.	0.120 in.	Smooth

# 15° Wire Coil Collated Nails

Wood Framing, Roofing, Siding, and Pallet Nails

**GRABBER**  
CONSTRUCTION PRODUCTS

## Ordering Information and Product Options

Item No.	Length	Head Type	Head Dia.	Wire Dia.	Shank Type	Amount	Weight	Special Features
<b>Bright</b>								
<b>13.5 Gauge</b>								
WC134086SCBR	1 3/4 in.	Round	0.220 in.	0.086 in.	Screw	14,000	42 lb.	Pallet/Utility nails
<b>12.5 Gauge</b>								
WC112099SCBR	1 1/2 in.	Round	0.260 in.	0.099 in.	Screw	12,000	42 lb.	Pallet/Utility nails
GAC4DS	1 1/2 in.	Round	0.248 in.	0.099 in.	Smooth	12,000	41 lb.	
WC134099SCBR	1 3/4 in.	Round	0.260 in.	0.099 in.	Screw	9,000	36 lb.	Siding nails
WC200099SCBR	2 in.	Round	0.260 in.	0.099 in.	Screw	9,000	41 lb.	
WC200090SCBR	2 in.	Round	0.220 in.	0.090 in.	Screw	9,000	34 lb.	Pallet/Utility nails
WC214099SCBR	2 1/4 in.	Round	0.260 in.	0.099 in.	Screw	9,000	45 lb.	Siding nails
GAC7DS	2 1/4 in.	Round	0.248 in.	0.099 in.	Smooth	9,000	46 lb.	Pallet/Utility nails
WC212099SCBR	2 1/2 in.	Round	0.260 in.	0.099 in.	Screw	9,000	50 lb.	Siding nails
<b>11.5 Gauge</b>								
WC238113RGBR	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	4,000	28 lb.	Framing nails
WC238113RGBRH	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	2,700	28 lb.	Siding nails
WC238113BR	2 3/8 in.	Round	0.276 in.	0.113 in.	Smooth	4,000	28 lb.	Framing nails
<b>11 Gauge</b>								
WC234120SCBR	2 3/4 in.	Round	0.276 in.	0.120 in.	Screw	4,000	36 lb.	Framing nails
WC300120RGBR	3 in.	Round	0.276 in.	0.120 in.	Ring	4,000	39 lb.	
WC300120SCBR	3 in.	Round	0.276 in.	0.120 in.	Screw	4,000	39 lb.	
WC300120BR	3 in.	Round	0.276 in.	0.120 in.	Smooth	4,000	39 lb.	
WC314120SCBR	3 1/4 in.	Round	0.276 in.	0.120 in.	Screw	4,000	42 lb.	
WC314120BR	3 1/4 in.	Round	0.276 in.	0.120 in.	Smooth	4,000	42 lb.	

# 15° Wire Coil Collated Nails

Wood Framing, Roofing, Siding, and Pallet Nails



Ordering Information and Product Options (continued)

Item No.	Length	Head Type	Head Dia.	Wire Dia.	Shank Type	Amount	Weight	Special Features
<b>Bright (continued)</b>								
<b>10.5 Gauge</b>								
WC300131BR	3 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	46 lb.	Framing nails
WC300131BRH	3 in.	Round	0.276 in.	0.131 in.	Smooth	2,400	28 lb.	
WC314131BR	3 1/4 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	50 lb.	
WC314131BR45	3 1/4 in.	Round	0.276 in.	0.131 in.	Smooth	4,500	56 lb.	
<b>Hot-Dip Galvanized</b>								
<b>13 Gauge</b>								
WC112092RGHDG	1 1/2 in.	Round	0.220 in.	0.092 in.	Ring	3,600	11 lb.	
WC200092RGHDG	2 in.	Round	0.220 in.	0.092 in.	Ring	3,600	14 lb.	
WC214092RGHDG	2 1/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	16 lb.	
WC214092HDG	2 1/4 in.	Round	0.220 in.	0.092 in.	Smooth	3,600	16 lb.	
WC212092RGHDG	2 1/2 in.	Round	0.220 in.	0.092 in.	Ring	3,600	17 lb.	
<b>11.5 Gauge</b>								
WC238113RGHDG	2 3/8 in.	Round	0.276 in.	0.113 in.	Ring	4,000	28 lb.	Framing nails
<b>11 Gauge</b>								
CR112HDG	1 1/2 in.	Round	0.375 in.	0.120 in.	Smooth	7,200	35 lb.	Roofing nails
WC300120RGHDG	3 in.	Round	0.276 in.	0.120 in.	Ring	4,000	39 lb.	Framing nails
WC300120RGHDGH	3 in.	Round	0.276 in.	0.120 in.	Ring	2,400	23 lb.	High load, Framing nails
<b>10.5 Gauge</b>								
WC212131HDG	2 1/2 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	39 lb.	Framing nails
WC300131HDG	3 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	46 lb.	
WC314131HDG	3 1/4 in.	Round	0.276 in.	0.131 in.	Smooth	4,000	50 lb.	

## 15° Wire Coil Collated Nails

Wood Framing, Roofing, Siding, and Pallet Nails

**GRABBER**  
CONSTRUCTION PRODUCTS

### Ordering Information and Product Options (continued)

Item No.	Length	Head Type	Head Dia.	Wire Dia.	Shank Type	Amount	Weight	Special Features
<b>Electrogalvanized</b>								
<b>13 Gauge</b>								
WC134092RGEG	1 3/4 in.	Round	0.220 in.	0.092 in.	Ring	3,600	31 lb.	Siding nails
WC200092RGEG	2 in.	Round	0.220 in.	0.092 in.	Ring	3,600	14 lb.	
WC200099RGEG	2 in.	Round	0.260 in.	0.099 in.	Ring	9,000	41 lb.	
WC214092EG	2 1/4 in.	Round	0.220 in.	0.092 in.	Smooth	3,600	16 lb.	
WC214092EG9M	2 1/4 in.	Round	0.220 in.	0.092 in.	Smooth	9,000	39 lb.	
<b>11 Gauge</b>								
CR100EG	1 in.	Round	0.375 in.	0.120 in.	Smooth	7,200	23 lb.	Roofing nails
CR114EG	1 1/4 in.	Round	0.375 in.	0.120 in.	Smooth	7,200	29 lb.	
CR114R	1 1/4 in.	Round	0.375 in.	0.120 in.	Ring	7,200	29 lb.	
CR112EG	1 1/2 in.	Round	0.375 in.	0.120 in.	Smooth	7,200	35 lb.	
CR112R	1 1/2 in.	Round	0.375 in.	0.120 in.	Ring	7,200	35 lb.	
CR134EG	1 3/4 in.	Round	0.375 in.	0.120 in.	Smooth	7,200	41 lb.	
CR134R	1 3/4 in.	Round	0.375 in.	0.120 in.	Ring	7,200	41 lb.	Framing nails
WC300120SCEG	3 in.	Round	0.276 in.	0.120 in.	Screw	4,000	39 lb.	
<b>10.5 Gauge</b>								
WC314131EGR45	3 1/4 in.	Round	0.276 in.	0.131 in.	Ring	4,500	56 lb.	Framing nails

# 15° Wire Coil Collated Nails

Wood Framing, Roofing, Siding, and Pallet Nails



## Ordering Information and Product Options (continued)

Item No.	Length	Head Type	Head Dia.	Wire Dia.	Shank Type	Amount	Weight	Special Features
<b>Stainless Steel</b>								
<b>13 Gauge</b>								
WC112092RGSS	1 1/2 in.	Round	0.220 in.	0.092 in.	Ring	900	4 lb.	Siding nails
SSWC112093RG	1 1/2 in.	Round	0.220 in.	0.093 in.	Ring	3,600	17 lb.	
WC134090RGSS	1 3/4 in.	Round	0.220 in.	0.090 in.	Ring	3,600	16 lb.	
SSWC2316090RG	2 3/16 in.	Round	0.220 in.	0.090 in.	Ring	9,000	50 lb.	Framing nails
WC214090RGSS	2 1/4 in.	Round	0.220 in.	0.090 in.	Ring	3,600	17 lb.	Siding nails
<b>12.5 Gauge</b>								
WC225099RSSS	2 1/4 in.	Round	0.260 in.	0.099 in.	Ring	3,600	18 lb.	Framing nails
<b>11 Gauge</b>								
CR114SSR	1 1/4 in.	Round	0.375 in.	0.120 in.	Ring	7,200	29 lb.	Roofing nails
CR112SS	1 1/2 in.	Round	0.375 in.	0.120 in.	Smooth	7,200	35 lb.	
CR134SSR	1 3/4 in.	Round	0.375 in.	0.120 in.	Ring	7,200	41 lb.	

Note: Product availability is subject to change without prior notice, and the availability of products may differ from what is printed in literature and displayed on our website.

15° Wire Coil Collated Nails  
PS1070 USA-ENG/Rev. 2-26

Grabber Construction Products, Inc.  
3125 W. Executive Pkwy., Suite 200  
Lehi, UT 84048

(800) 477-8876 | GrabberPro.com

**SAFETY FIRST:** Wear appropriate personal protective equipment. Read applicable SDS and literature before handling and installation.

**TECHNICAL INFORMATION:** Technical information contained herein is furnished without charge or obligation and is given and accepted at the recipient's sole risk. Because conditions of use may vary and are beyond our control, Grabber Construction Products makes no representation about, and is not responsible or liable for, the accuracy or reliability of data associated with uses of any product described herein. Grabber Construction Products reserves the right to modify this document without prior notice.

© 2026 Grabber Construction Products, Inc. | All rights reserved | Printed in U.S.A.  
The trademarks Grabber, and Stylized G on Grabber Fasteners, are trademarks of Grabber Construction Products, Inc.

