


Submittal Sheet
#213 Double Pintle Brick Veneer Anchor
#282 Double Pintle Tie

The 14 gage plate anchor is attached directly to the backup system. Insulation is then placed above and below the extended tabs. (Note: If ties are placed 16" on center, your insulation will have to be in 16" strips). Pintle ties are placed in the tabs allowing for 1 ¼" vertical adjustment above or below the tab.

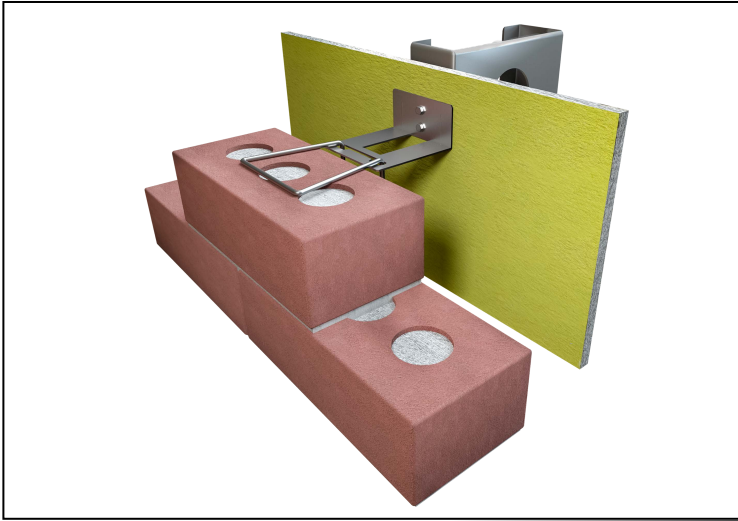

Standards:

#213 Plate

Thickness: 14 gage

Insulation Size:	0"	1"	1-1/2"	2"
	2-1/2"	3"	3-1/2"	4"

#282 Pintle Tie

Diameter: 3/16"

Length: 3 ¼" 4 ¼" 5 ¼"

Finish: Stainless type 304 Hot Dip Galvanized

Quantity: _____

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.
Wire ties and anchors: ASTM A 580 AISI Type 304
(AISI Type 316 available upon request)

Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/ ft²).(0.46kg/m²)

Plain Carbon Steel: ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08
Wire: ASTM A 82/A82M Tensile Strengths 80,000 psi Yield Point 70,000 psi