
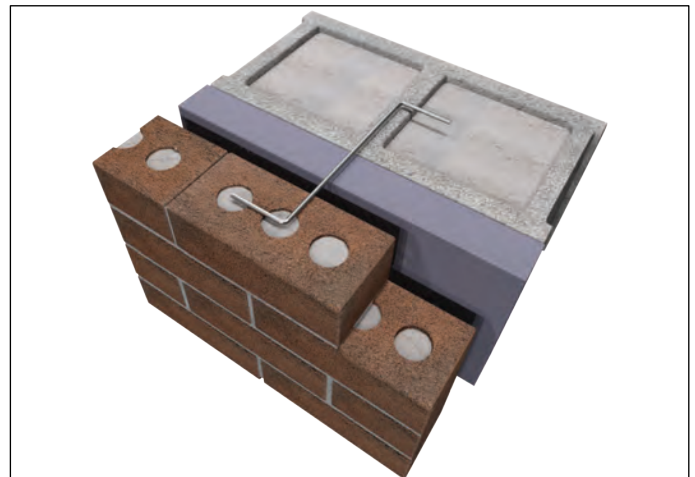


Submittal Sheet

#251 Z-Wire Wall Tie

Used to tie two composite masonry walls with grouted cells.
(Note: Anchors with drips are no longer permitted in the Masonry Code)

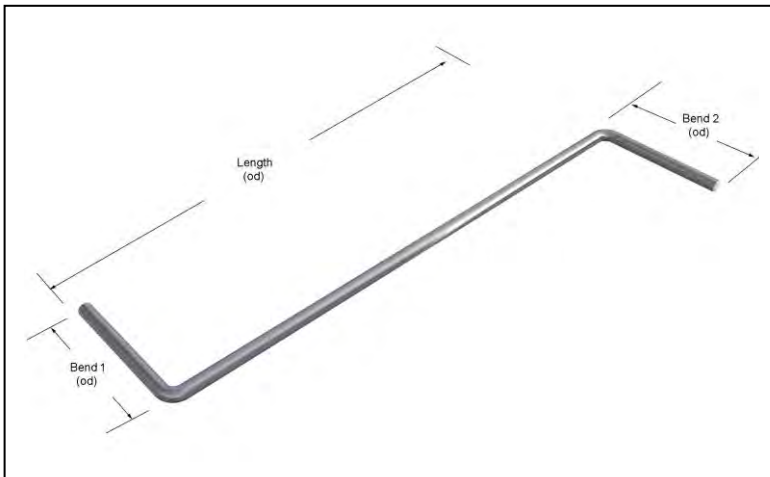

Standard ☐ Special ☐

Standards:

Diameter: 3/16" Bend Length: 2"

Length: ☐ 6" ☐ 8" ☐ 10" ☐ 12"

Finish: ☐ Hot Dip Galvanized ☐ Stainless Steel

Specials:

Thickness: 3/16" Length (od): _____

Bend 1 Length (od): _____ Bend 2 Length (od): _____

Finish: ☐ Stainless type 304

Quantity: _____

Material Specifications

Stainless Steel: Sheet metal anchors and ties: ASTM A 167, ASTM A 666, ASTM A 240/A240M AISI Type 304.

Wire ties and anchors: ASTM A 580 AISI Type 304

(AISI Type 316 available upon request)

Hotdip Galvanized: ASTM A 153 Class B-2: (1.50 oz/ ft²).(0.46kg/m²)

Mill Galvanized: Sheet metal anchors and ties: ASTM A 653 G60

Wire: ASTM A 641 (0.1 oz/ ft².)

Plain Carbon Steel: ASTM A1008/A1008M Structural Steel ASTM A36/A36M-08

Wire: ASTM A 82/A82M Tensile Strengths 80,000 psi Yield Point 70,000 psi