
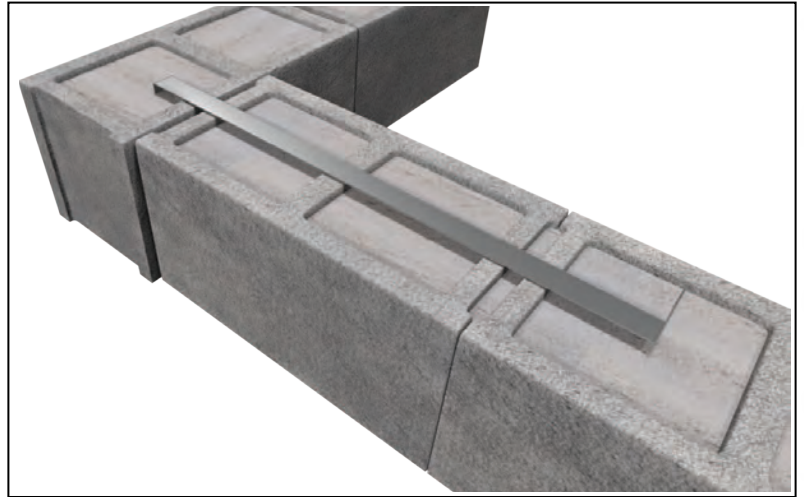


# Submittal Sheet #272 Z-Type Rigid Steel Anchor

Used for connecting intersection load-bearing CMU walls. Code requires placement every 4ft vertically and the cells must be grouted. **Use #140 Z-Type Stone Anchor for custom sizes.**

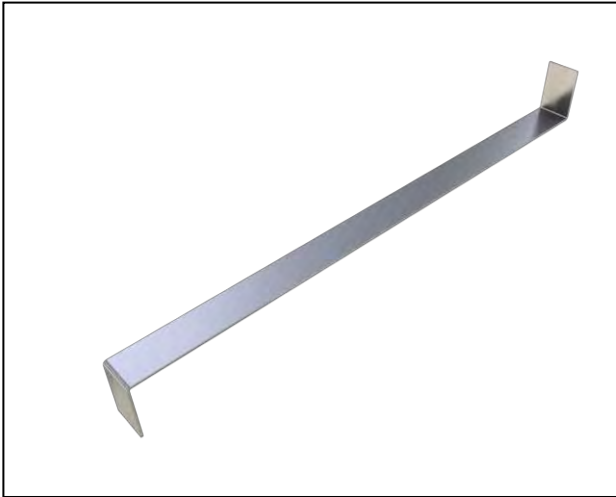

### Standards:

Thickness: 1/4" Width: 1 1/2" Length (od): 24"

Bends (od): 2"

Finish: Hot Dip Galvanized

### Specials:

**Use #140 Z-Type Stone Anchor for custom sizes.**

Quantity: \_\_\_\_\_

### Material Specifications

**Hotdip Galvanized:** ASTM A 153 Class B-2:  
(1.50 oz/ ft<sup>2</sup>)(0.46kg/m<sup>2</sup>)

**Plain Carbon Steel:** ASTM A1008/A1008M  
Structural Steel ASTM A36/A36M-08

Wire: ASTM A 82/A82M Tensile Strengths  
80,000 psi Yield Point 70,000 psi