


Used to anchor wood joists to a masonry wall. Pin section is grouted into the CMU wall and the strap is nailed to the floor joists. Fixed Pin is 3/8" diameter x 5" long centered 1" from end of anchor.

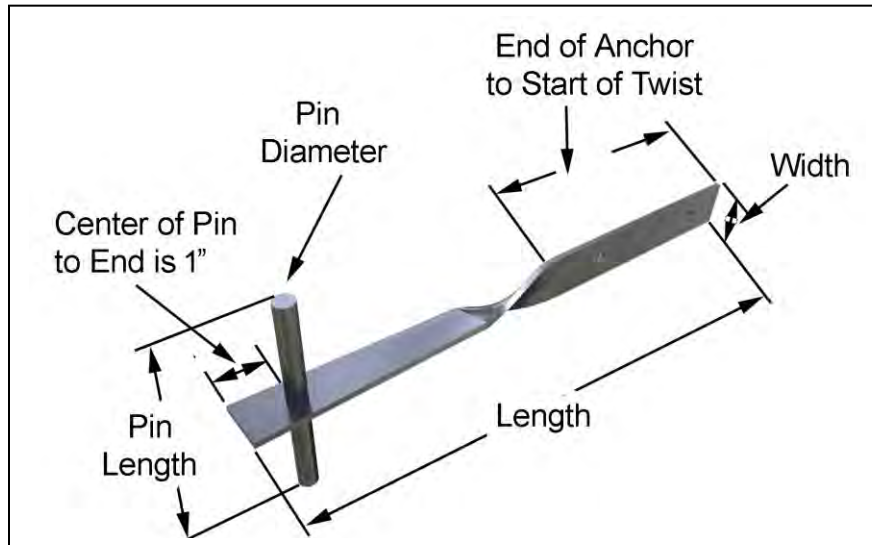

Custom:

Thickness: 1/8" Width: 1" Mill Galvanized Center
 of Pin to End: 1"

Pin is 3/8" diameter x 5" and is fixed in place.

7/32" nailing holes (centered 3/4" from end and 3" o.c.)

Number of Holes: _____

Length: _____

End of Anchor to Start of Twist: _____

Finish: Mill Galvanized

Quantity: _____

Material Specifications

Mill Galvanized: Sheet metal anchors and
 ties: ASTM A 653 G60
 Wire: ASTM A 641 (0.1 oz/ ft².)