




ROOF GARDEN

Aluminum Edge

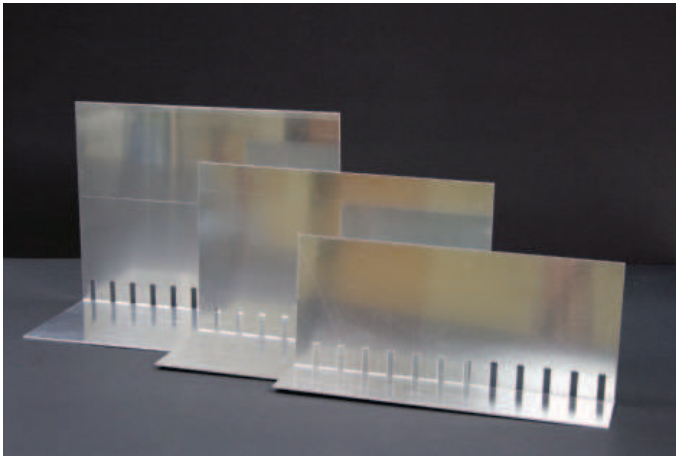

Description

CCW's Aluminum Edge is manufactured from .080 gauge aluminum and is designed with slots to facilitate maximum drainage beneath the Green Roof system while retaining the growth media. The Aluminum Edge is available in three heights (see Typical Properties and Characteristics chart) and is designed to account for the 1.25" height of the CCW MiraDRAIN® G4 drainage composite to maintain the desired growth media depth. CCW's Aluminum Edge is delivered in a standard length of 10'. Also available in stainless steel, custom heights and anodized colors.

Features and Benefits

- Excellent growth media retention
- Allows maximum drainage
- Accounts for drainage board height
- Will not rust or corrode
- Extremely durable

Installation

CCW's Aluminum Edge is installed directly over the waterproofing membrane. Prime the membrane and Aluminum Edge with the appropriate CCW membrane primer, following CCW's priming procedure. Apply 3" wide SecurTAPE™ to the bottom side of the Aluminum Edge, ensuring that the SecurTAPE extends .25" beyond the edges and corners. Place Aluminum Edge in desired location, ensuring flange is facing inward towards the Green Roof system. Carefully remove the release liner by pulling at a 90° angle. Once release liner has been removed, apply adequate pressure by rolling or stepping on the flange. For end-to-end joins, allow for .125" gap to compensate for thermal expansion.

Size	Overall Height	Flange Width	Use For
4"	5.25"	2.75"	Shallow/Ultra-Extensive 4" and less media depth
6"	7.25"	4.75"	Medium/Extensive Between 6" and 8" media depths
8"	9.25"	5.75"	Deep/Intensive Between 6" and 8" media depths

LEED® Information

Pre-consumer Recycled Content	19.75%
Post-consumer Recycled Content	32.6%
Manufacturing Location	Asheville, NC