




A step 1 component of the Henry® 1-2-3 Moisture Control System™

Henry
A CARLISLE COMPANY

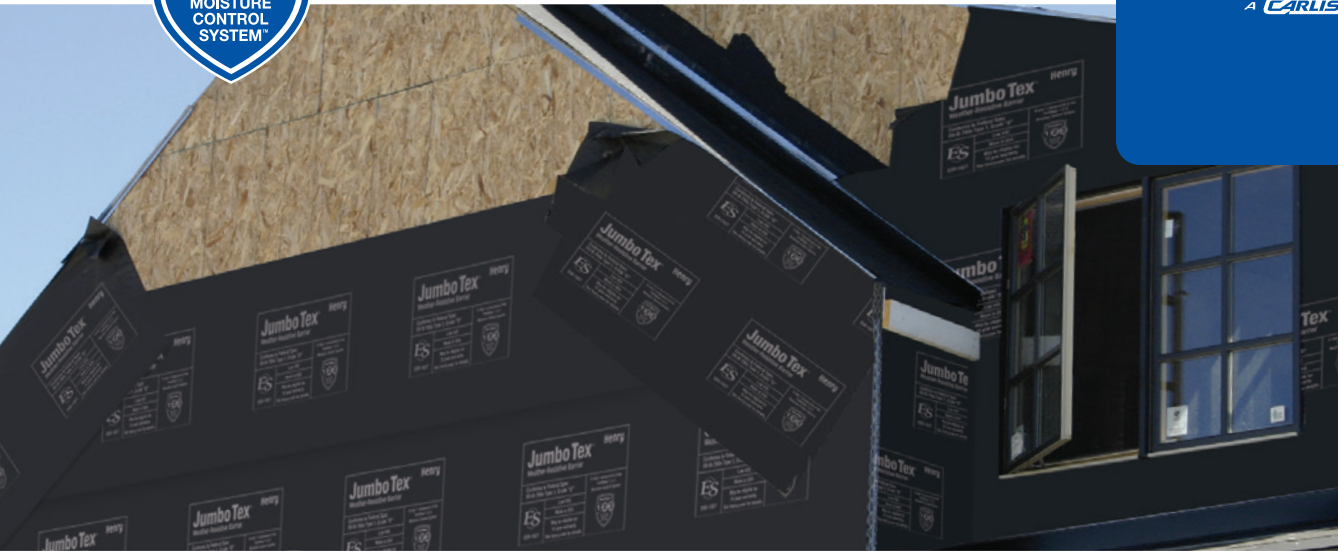

Henry® Jumbo Tex® Weather-Resistive Barrier

DEPENDABLE, COST-EFFECTIVE BUILDING PAPER

Designed to guard against the internal wall damage caused by the intrusion of water or excessive moisture, **Henry Jumbo Tex** is a proven Grade “D” weather-resistive barrier that exceeds industry standards.

Specifically developed for use behind fiber cement siding, residential stucco, vinyl and wood siding, **Jumbo Tex** provides optimal breathability to prevent the potential for moisture condensation within exterior walls.

Part of the Henry® 1-2-3 moisture control system, **Jumbo Tex** is backed by an industry-leading 15-year material PLUS labor warranty.



FEATURES AND BENEFITS:

- ✓ Delivers two times the water protection of standard Grade “D” paper
- ✓ Excellent balance between water resistance and permeability
- ✓ Highly cost-effective protection against moisture
- ✓ Less likely to tear during installation
- ✓ For residential stucco and stucco applications.

Building Confidence®

PERFORMANCE STANDARDS YOU CAN TRUST

Jumbo Tex is a classic Grade “D” weather-resistive barrier designed for use behind a variety of exterior wall claddings. It provides excellent protection from internal wall damage due to moisture leakage and condensation.

| Physical/performance property | Typical value | Test method |
|-------------------------------|--------------------------------------|--------------|
| Water vapor transmission | 70 grams 10 perms (MVT) | ASTM E96 (A) |
| Water resistance | 20 minutes | ASTM D779 |
| Tensile strength | MD - 55 lb./inch CD - 23 lb./inch | ASTM D828 |

*Jumbo Tex is tested in accordance with ASTM International procedures. The values shown in Table 1 are typical values obtained in these tests.

Product characteristics

| | |
|-------------|---|
| Composition | An asphalt-saturated kraft Grade “D” breather type sheathing paper. |
| Roll size | 40" x 97.2 lineal ft. (324 sq. ft.) |
| Weight | 3.6 lbs per 100 sq. ft. |

Product approvals, certifications and specifications

| |
|---|
| Exceeds Federal Specification UU-B-790a, Type 1, Grade “D”, Style 2 |
| Complies with the International Code Council Evaluation Services Acceptance Criteria for Water Resistive Barriers (AC 38) |
| Complies as an alternative to the water-resistive barrier specified in Section 1404.2 of the 2012 and 2015 International Building Code® and Section 1403.2 of the 2018 International Building Code® |
| Complies as an alternative to the weather-resistant barriers specified in Section R703.2 of the International Residential Code® |
| Complies as a water-resistant barrier specified in Section R703.6.3 of the 2012 International Residential Code® and Section R703.7.3 of the 2015 and 2018 International Residential Code® |
| Complies as a water-resistive barrier specified in Section 2510.6 of the 2012 International Building Code®. |
| Meets the 2015 and 2018 International Building Code® requirements for an intervening layer when installed over an ASTM E2556, Type II in accordance with the Exception in Section 2510.6 |
| ICC Evaluation Service Report 1027 |
| ASTM D779 – Standard Test Method for Water Resistance of Paper, Paperboard and Other Sheet Materials by the Dry Indicator Test Method |
| ASTM D828 – Tensile Properties of Paper and Paperboard Using Constant-Rate-of-Elongation Apparatus |



Henry
1-2-3
MOISTURE CONTROL SYSTEM™

Featuring a range of compatible weather barriers, flashings and sealants, the Henry® 1-2-3 Moisture Control System™ makes it easier than ever to build with confidence.

Limitations: Product should be covered as soon as possible. Inspect product to ensure it is free of any protrusions or damage which may detract from the weather-resistive barrier integrity. Holes, tears or punctures should be sealed with Moistop® Sealant or Henry Sheathing Tape. This product is not recommended for horizontal, below grade or roofing applications.

Installation: Jumbo Tex should be installed in accordance with the local applicable building code. The International Residential Code Section R703.2 states that weather-resistive barriers should be applied horizontally, with the upper layers overlapping the lower layer by a minimum of 2" (3" is recommended), and all vertical joints should be lapped a minimum of 6".

Availability: Henry products are distributed nationwide. For product information and pricing, please call a Henry distributor near you. If you need assistance locating a participating distributor, please call our Customer Service Department at 800.773.4777.

Henry Product Warranty Information: This product may be eligible for the 15-year Henry 1-2-3 Moisture Control System Warranty when used in conjunction with other products. See henry.com/warranty for details.

We, the manufacturer, warrant only that this product is free of defects, since many factors which affect the results obtained from this product – such as weather, workmanship, equipment utilized, and prior condition of the substrate – are all beyond our control. We will replace at no charge any product proved to have a material defect within 12-months of purchase, provided it has been applied in accordance with our written directions for uses we recommend as suitable for this product. Proof of purchase must be provided.

DISCLAIMER OF WARRANTIES AND LIMITATION OF LIABILITY: THIS LIMITED WARRANTY IS IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. NO ONE, INCLUDING THE MANUFACTURER, SHALL HAVE ANY LIABILITY OF ANY KIND BEYOND PRODUCT REPLACEMENT, INCLUDING FOR NEGLIGENCE OR FOR DIRECT, CONSEQUENTIAL, EXEMPLARY OR INCIDENTAL DAMAGES, RESULTING FROM ANY MISUSE, DEFECTS OR DELAYS CAUSED BY REPLACEMENT OR OTHERWISE. IF PURCHASER DOES NOT ACCEPT THESE TERMS, PURCHASER MAY RETURN WITHIN 30-DAYS OF PURCHASE ALL UNOPENED CONTAINERS OR PACKAGES OF PRODUCT PURCHASED FOR A FULL REFUND. RETENTION OF PRODUCT BEYOND 30-DAYS, OR USE OF PRODUCT SHALL CONSTITUTE ACCEPTANCE OF THESE TERMS, CONDITIONS, AND DISCLAIMERS. THIS LIMITED WARRANTY AND LIABILITY DISCLAIMER PROVIDES THE PURCHASER’S EXCLUSIVE REMEDY FOR ANYTHING RELATING TO THE PRODUCT.

To the extent that any part of this LIMITED PRODUCT WARRANTY AND LIABILITY DISCLAIMER is determined unenforceable under the law of the place of purchase of the product, that part is severed and the remainder of these terms remain in full force and effect. To the extent permitted by law, the duration of any implied warranties is limited to the duration of Henry’s express warranty.

This warranty language supersedes any language found elsewhere, including product labels, sell sheets and/or technical documents.