


| ø KWIK-CON | | d _f [mm] |
|------------|--|---------------------|
| 6.5 | | 8 |
| 4.8 | | 6.5 |

| [mm] | h ₁ [mm] | t _{fix} |
|------|------------------------|------------------|
| 32 | 44 - t _{fix} | 0...6 mm |
| 44 | 57 - t _{fix} | 0...18 mm |
| 57 | 70 - t _{fix} | 12...31 mm |
| 70 | 83 - t _{fix} | 25...44 mm |
| 83 | 95 - t _{fix} | 38...57 mm |
| 95 | 108 - t _{fix} | 50...69 mm |
| 102 | 114 - t _{fix} | 57...76 mm |



| ø KWIK-CON | | | |
|------------|-------------------------|--|--|
| 4.8mm | Kwik-Con II+ Drill Bits | 438630 (TE-C SDS) 438634 (Smooth Shank) | 438631 (TE-C SDS) 438635 (Smooth Shank) |
| 6.4mm | Kwik-Con II+ Drill Bits | 438628 (TE-C SDS) 438632 (Smooth Shank) | 438629 (TE-C SDS) 438633 (Smooth Shank) |

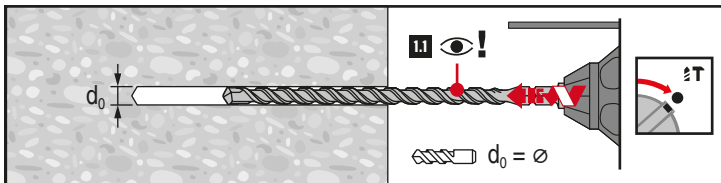