




5/8"
KB-TZ, KB-TZ SS 304,
KB-TZ SS 316

2143082 A4-02.2018

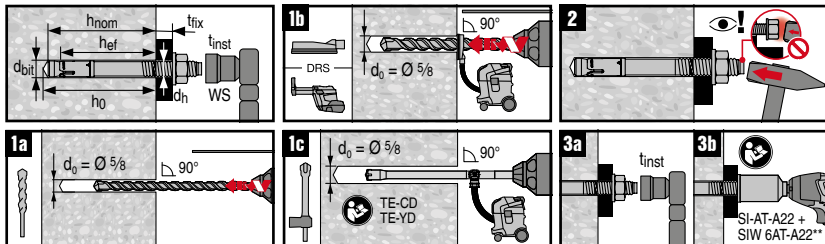

Anchor diameter	[inch]	5/8							
d_{bit}	[inch]	5/8							
Anchor Length	[inch]	4 3/4	6			8 1/2		10	
h_{ef}	[inch]	3 1/8	3 1/8	4	3 1/8	4	3 1/8	4	
min. h_{nom}	[inch]	3 9/16	3 9/16	4 7/16	3 9/16	4 7/16	3 9/16	4 7/16	
min. h_0 ***	[inch]	3 3/4	3 3/4	4 3/4	3 3/4	4 3/4	3 3/4	4 3/4	
T_{inst}	[ft-lb]	60	60			60		60	
T_{inst} (Masonry)	[ft-lb]	35	35			35		35	
d_h	[inch]	1 1/16	1 1/16			1 1/16		1 1/16	
WS (Wrench Size)	[inch]	15/16	15/16			15/16		15/16	
max. t_{fix}	[inch]	9/16	1 13/16	15/16	4 5/16	3 7/16	5 13/16	4 15/16	

Use only carbide-tipped masonry drill bits complying with ANSI B212.15.1994

** Adaptive torque (AT) system not applicable for installation in concrete masonry unit / grout filled block

*** AT System not applicable for wood fastening applications

For a non-hole cleaning installation (step 1a or 1b), make sure to drill deep enough to achieve h_0 , taking into account the depth of debris remaining in the hole