




# Lox♦All® Adjustable Joint Reinforcement

## 170-2X-SH Truss Eye-Wire

### Adjustable Reinforcement with 2X-Seismic Hook

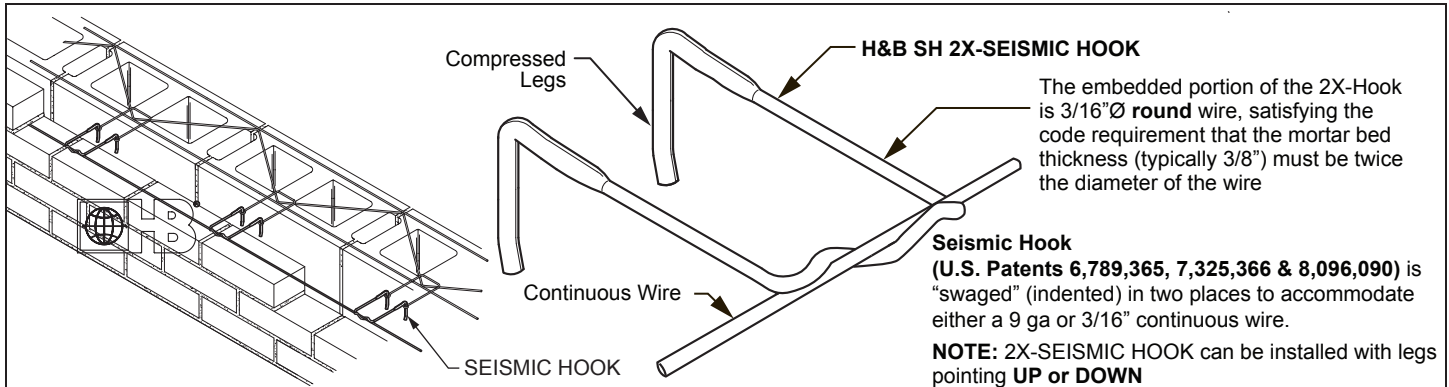

Hohmann & Barnard's 2X-Hook has been tested and designed to withstand over 200-lbf, in tension or compression, at maximum allowed offset (TMS 402/602-16 12.2.2.5.5.4) of 1/4" (disengagement of the pintle from the veneer anchor). These results exceed BIA recommendations and the capabilities of standard "round wire" hooks/pintles by over 100%, while maintaining the ASTM A1064/1064M wire specification. 2X-Hook: U.S. Pat. No. 8,613,175

#### EYE-WIRE WITH 2X HOOKS (WORKING LOAD\*)

CAVITY	0" OFFSET	5/8" OFFSET	1 1/4" OFFSET	TEST
4 1/2"	807#	478#	237#	TENSION
4 1/2"	709#	487#	288#	COMPRESSION
7 1/2"	851#	488#	266#	TENSION
7 1/2"	700#	463#	288#	COMPRESSION

\* WORKING LOAD DETERMINED AT .05" DEFLECTION

Tests were completed for 3" and 6" insulation with 1 1/2" air cavity.

#### DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

##### MATERIAL CONFORMANCE

Hohmann & Barnard joint reinforcement products conform to:  
**ASTM A951/A951M** (Standard Specification for Steel Wire for Masonry Joint Reinforcement)

**ACI / ASCE 530** (Building Code Requirements for Masonry Structures)

**Wire** (Carbon Steel): Prefabricated from cold-drawn steel wire conforming to **ASTM A1064/A1064M**

Tensile Strength - 80,000 p.s.i. | Yield Point - 70,000 p.s.i. minimum  
 Zinc Coating:

Hot-Dip Galvanized after fabrication: **ASTM A153/A153M-B2** (1.5 oz/ft<sup>2</sup>)

**Wire** (Stainless Steel): **ASTM A580/ASTM A580M** - AISI Type 304  
 (Type 316 available on special order)

##### Wire Diameter/Dimensions:

9 gauge (.148" or W1.7) or 3/16" (.187" or W2.8)

Side Rods and Cross Rods available:

- (S) Standard Weight: 9 GA Side Rods x 9 GA Cross Rods
- (EH) Extra Heavy: 3/16"Ø Side Rods x 9 GA Cross Rods
- (SHD) Super Heavy Duty: 3/16"Ø Side Rods x 3/16"Ø Cross Rods

Cross Rods welded 16" O.C.  
 First Cross Rods welded 12" in from each end to allow lap splices per code requirements.

Eyes and 2X-SEISMIC HOOKS are 3/16"Ø.

**H&B manufactures steel wire products from a minimum of 85% recycled material.**

##### Eye-Wire Finish:

Hot-Dip Galvanized | Stainless Steel  Type 304  Type 316  
**Note: H&B recommends Stainless Steel for maximum protection against corrosion.**

**170 Wire Size** (10' length std., custom length special order):

(S) Standard  (EH) Extra Heavy  (SHD) Super Heavy Duty

**Block Size:** (Std. sizes: 4" - 16" wall, other widths available on special request.)

4"  6"  8"  10"  12"  14"  16"

**ENTER WIDTHS** (If not applicable, enter 0 or N/A for value):

**INSULATION:** \_\_\_\_\_ | **CAVITY:** \_\_\_\_\_ | **VENEER:** \_\_\_\_\_

##### Compressed Leg 2X-Seismic Hook Finish:

Hot-Dip Galvanized | Stainless Steel  Type 304  Type 316

**Compressed Leg 2X-Seismic Hook:** Length (Model), 3/16"Ø (5mm) wire

3" (300-S-2X)  4" (400-S-2X)  5" (500-S-2X)

##### Continuous Wire Finish:

Hot-Dip Galvanized | Stainless Steel  Type 304  Type 316

**Continuous Wire:**  9 Gauge  3/16"Ø

**IMPORTANT:** Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question. This drawing and/or data sheet is the confidential and proprietary information of Hohmann & Barnard, Inc. and is not to be reproduced, copied or disclosed, in whole or in part, without the prior written consent of H&B.

**HOHMANN & BARNARD, INC.**  
 CORPORATE HEADQUARTERS  
 30 Rasons Ct.  
 Hauppauge, NY 11788  
 T: 800-645-0616 | [www.h-b.com](http://www.h-b.com)

**Branch/Subsidiary Locations:**  
 ALABAMA - ILLINOIS - MARYLAND  
 NEW YORK - PENNSYLVANIA - TEXAS  
 UTAH - CANADA

© 2013-2022