


HOHMANN & BARNARD, INC.
a MiTek company

Flashing and Reglets

Copper NA

Asphalt Free Copper Fabric Flashing

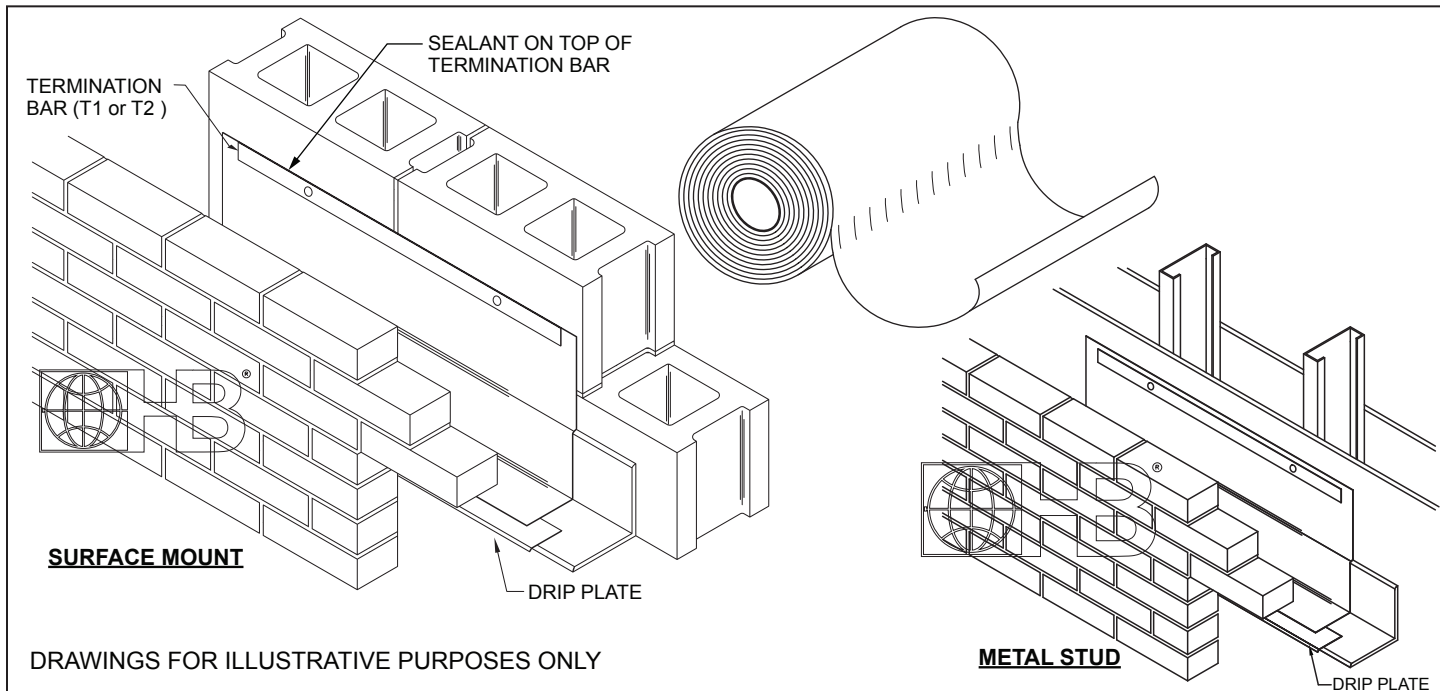

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

Material:

Copper sheet used in the fabrication of copper laminates conforms to ASTM B370 (110 Alloy).

Copper-Fabric™ NA Copper Fabric Flashing is a composite membrane consisting of a polyethylene film laminated to BOTH sides of a 3, 5, or 7 oz. copper sheet to create a superior flashing.

- Suitable for thru-wall or surface-mount usage.
- An optional stainless steel drip edge is recommended to ensure diversion of moisture to outside of building (product can be cut flush with exterior wall)
- Surface mount applications should be attached with a stainless steel or aluminum termination bar
- UV-resistant for up to 180 days.
- Highly resistant to oils and will repel most chemicals
- Extremely tough, with excellent impact and tear resistance.
- Maintains flexibility in extreme heat or cold weather environments.
- **Asphalt-free** composition compatible with a wide variety of sealants.
- Available with 3, 5, or 7 oz. copper sheet.
- Available in widths from 12" - 36", other widths available upon request

• **Please refer to Hohmann & Barnard installation instructions for more information.**

Width: (25 ft. rolls)

- | | | |
|------------------------------|--------------------------------------|------------------------------|
| <input type="checkbox"/> 12" | <input type="checkbox"/> 20" | <input type="checkbox"/> 32" |
| <input type="checkbox"/> 16" | <input type="checkbox"/> 24" | <input type="checkbox"/> 36" |
| <input type="checkbox"/> 18" | <input type="checkbox"/> Other _____ | |

Weight: (film color)

- | | | |
|---------------------------------------|--------------------------------------|--|
| <input type="checkbox"/> 3 oz. (gray) | <input type="checkbox"/> 5 oz. (red) | <input type="checkbox"/> 7 oz. (beige) |
|---------------------------------------|--------------------------------------|--|

Stainless Steel Drip Plate: (Recommended)

- | | | |
|-------------------------------|-----------------------------|--------------------------------------|
| <input type="checkbox"/> 1 ½" | <input type="checkbox"/> 3" | <input type="checkbox"/> Other _____ |
|-------------------------------|-----------------------------|--------------------------------------|

Flex-Flash® Drip Edge:

- | |
|-----------------------------|
| <input type="checkbox"/> 3" |
|-----------------------------|

Termination Bar:

- | |
|---|
| <input type="checkbox"/> Stainless Steel (Type 304) |
| <input type="checkbox"/> Aluminum |
| <input type="checkbox"/> Plastic |

- | |
|--|
| <input type="checkbox"/> HB Sealant 1-Quart Tube |
|--|

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question. This drawing and/or data sheet is the confidential and proprietary information of Hohmann & Barnard, Inc. and is not to be reproduced, copied or disclosed, in whole or in part, without the prior written consent of H&B.

HOHMANN & BARNARD, Inc.

30 Rasons Court | Hauppauge, NY 11788
CORPORATE HEADQUARTERS
T: 800.645.0616 F: 631.234.0683
www.h-b.com

Branch/Subsidiary Locations:

ALABAMA - ARIZONA - ILLINOIS
MARYLAND - NEW YORK
PENNSYLVANIA - TEXAS - UTAH
CANADA

© 2013-2016 MiTek®