





HOHMANN & BARNARD, INC.

# Flashing and Reglets


## MFL - Metal Flashing

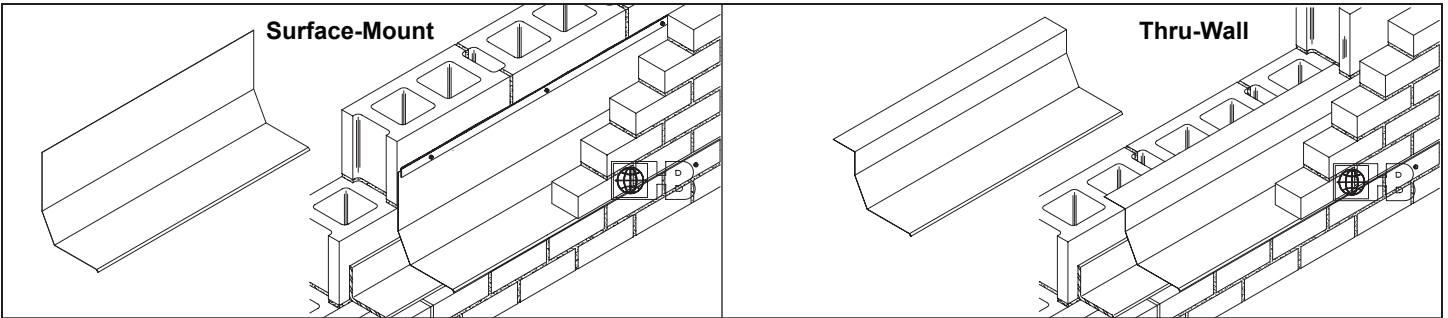


1.

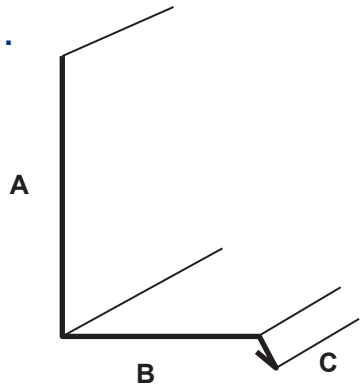

2.

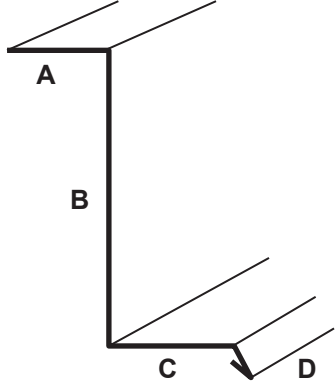

3.

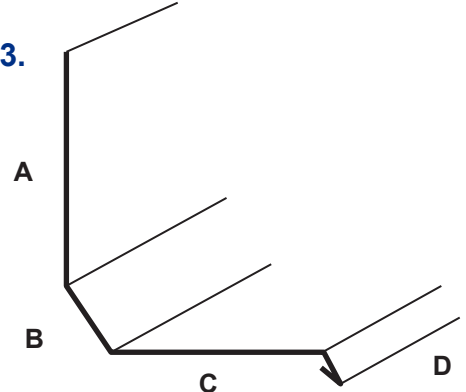

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

4.



5.



Hohmann & Barnard manufactures MFL metal flashing to the dimensions specified by the customer. Please enter dimensions in the profiles above, provide detailed dimensions, or submit a sketch with your order.

**Material Conformance:**

Stainless Steel Type 304 & 316: ASTM A240/A240M, ASTM A 666, ASTM A480/A480M  
 Copper: ASTM B370 - #110 Alloy

**\* Please refer to Hohmann & Barnard installation instructions**

**Material:** Standard length 8', Standard hem 3/8"

- Type 304 Stainless Steel, 26 gauge (standard)
- Copper 16 ounce

**Material (Special Order):**

- Copper 12 ounce       Copper 20 ounce
- Type 304     Type 316 Stainless Steel \_\_\_\_\_ gauge
- Custom Finish \_\_\_\_\_ / Custom Gauge \_\_\_\_\_
- Custom Length \_\_\_\_\_ (Maximum 10')

**Optional:**

- Inside Corner Piece (Surface-Mount)
- Inside Corner Piece (Thru-Wall)
- Outside Corner Piece (Surface-Mount)
- Outside Corner Piece (Thru-Wall)
- End Dam (State dimensions when ordering)
- HB Sealant

**IMPORTANT:** Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question. This drawing and/or data sheet is the confidential and proprietary information of Hohmann & Barnard, Inc. and is not to be reproduced, copied or disclosed, in whole or in part, without the prior written consent of H&B.