


## Masonry & Concrete Accessories

# Self-Expanding Cork

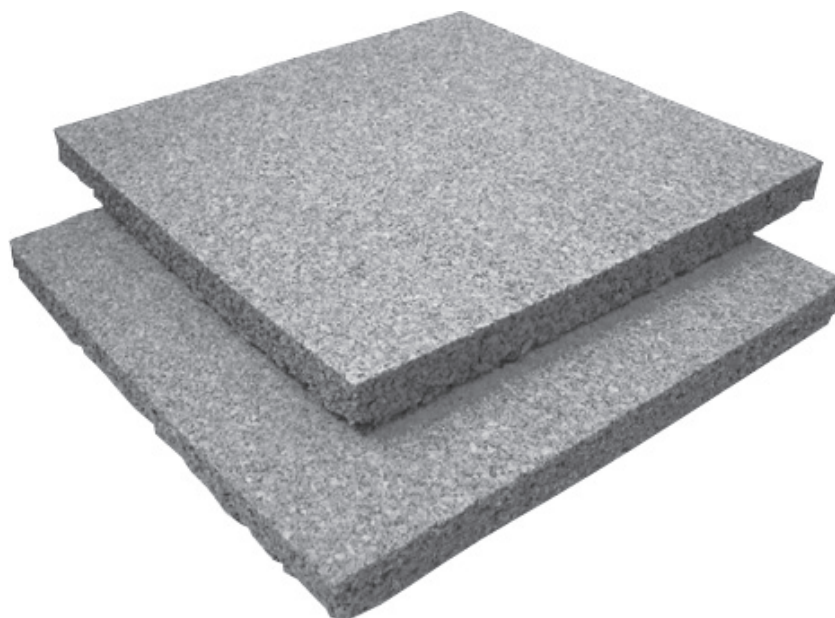

### DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

Self-Expanding Cork is pre-molded expansion joint filler for concrete. Self-Expanding Cork can be used in all concrete joints subject to excessive contraction, as could occur in dams, sewage treatment plants, waste water plants, flood walls, spill ways, and power plants.

- Pre-compressed at the factory under heat and pressure. This process permits the cork to expand up to 140% of its original thickness.
- Material will not expand prematurely under normal atmospheric conditions and can thus be field cut on site to the required size.
- The convenient 3' x 5' sheet size is easy to handle.
- Field Installation is not compromised by butting together broken pieces with rough edges.

### SPECIFICATION CONFORMANCE

ASTM - D1752 TYPE III  
AASHTO M 153, TYPE III

### DIMENSIONS:

**Thickness:** ☐ 1/8" ☐ 1/4" ☐ 3/8"  
☐ 1/2" ☐ 3/4" ☐ 1"

**Widths:** (up to 36" in 1/2" increments) \_\_\_\_\_

**Lengths:** ☐ 5' ☐ 10' ☐ Custom \_\_\_\_\_

### Note:

- Self-Expanding Cork is wrapped in moisture-proof paper.
- The factory packaging should not be opened until cutting and/or installation is required.
- Do not expose to rain or moisture after opening.