


STAINLESS STEEL STONE ANCHORS SLEEVE EXPANSION BOLT

The appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other professionals who are familiar with the specific requirements of the project.

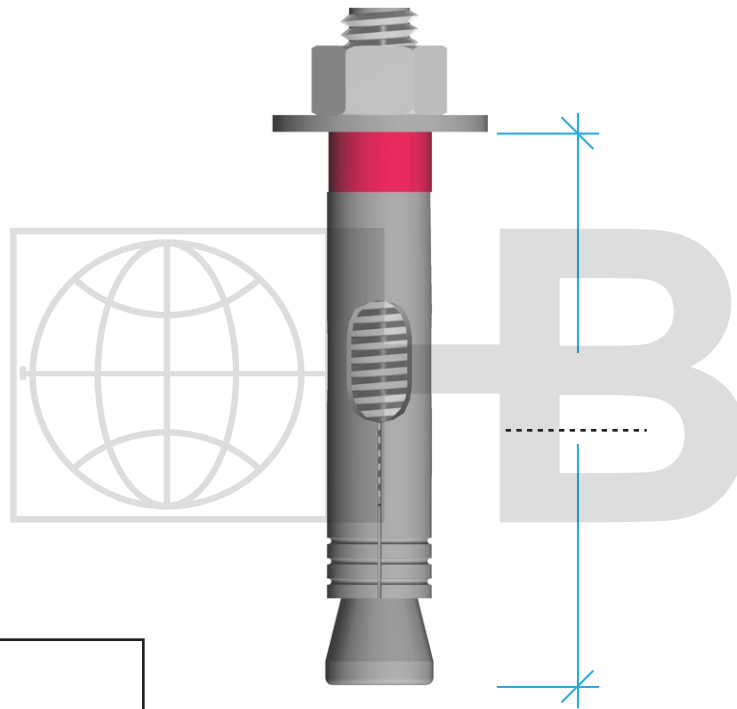

QUANTITY:

ST/ST Plate Min. Fy. = 45,000 p.s.i. (ASTM A666)
ST/ST Rounds Min. Fy. = 75,000 p.s.i. (ASTM A580/A580M)

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

FINISH:

- ☐ TYPE 304 Stainless Steel
☐ TYPE 316 Stainless Steel
☐ Zinc Mechanical Galvanized

THICKNESS:

- ☐ 5/16"/7.9 mm ☐ 1/2"/12.7 mm ☐ 3/4"/19 mm
☐ 3/8"/9.5 mm ☐ 5/8"/15.8 mm ☐ OTHER _____

Furnished in Type 304 ST/ST, 316 ST/ST, or Zinc Mechanical Galvanized.

PROJECT NAME:

LOCATION:

NOTES:

CONTACT INFO

Name :

Company:

Phone:

FAX:

Email:

Due to fabrication requirements and lead times, once a custom anchor order has been scheduled it cannot be cancelled and will not be returnable. Verify all measurements before signing this form. Any changes after the initial order is placed will require a new signed form, and an additional charge. By signing this document, you agree to the terms stated above and accept full responsibility for the accuracy of measurements.

Orders without a signature will not be processed.

ACCEPTED BY: _____

DATE: _____