




HOHMANN & BARNARD, INC.

## STAINLESS STEEL STONE ANCHORS #423 STONE ANCHOR

The appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other professionals who are familiar with the specific requirements of the project.

USE CHECKBOXES  
BELOW TO SET DIA

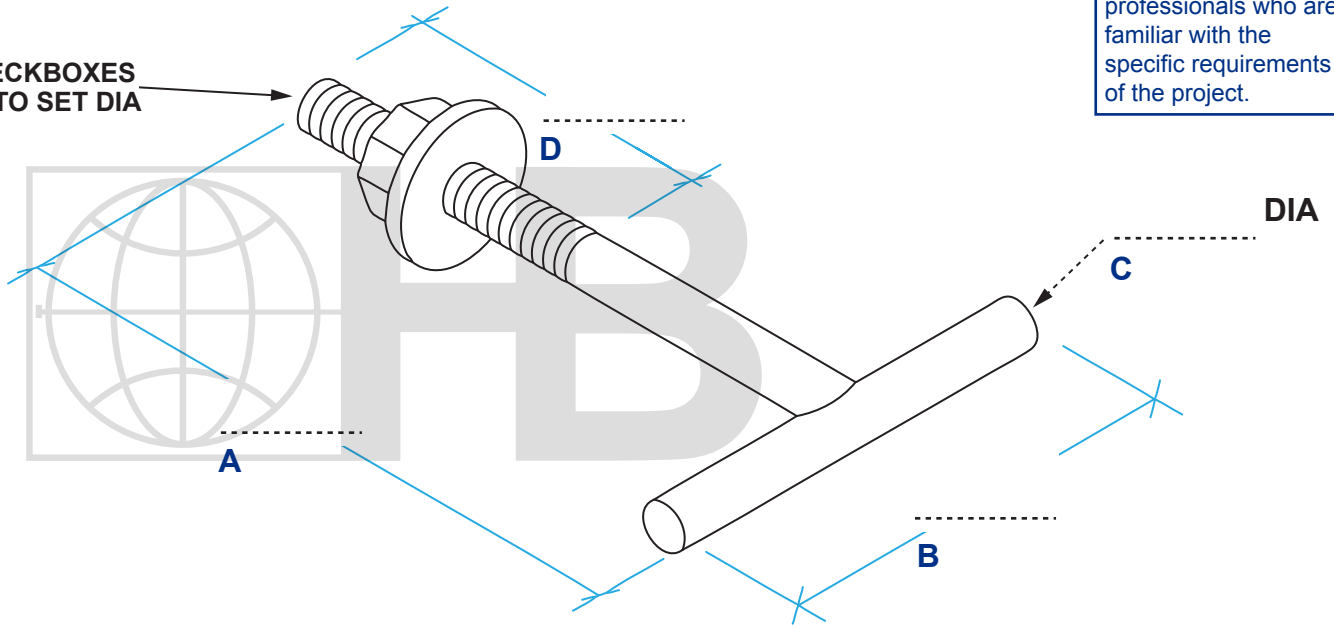

QUANTITY:

ST/ST Rounds Min. Fy. = 75,000 p.s.i. (ASTM A276/A276M)

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

### FINISH:

- ☐ TYPE 304 Stainless Steel  
☐ TYPE 316 Stainless Steel

### ROD DIAMETER:

- ☐ 1/4"/6.3 mm    ☐ 3/8"/9.5 mm    ☐ 5/8"/15.8 mm  
☐ 5/16"/7.9 mm    ☐ 1/2"/12.7 mm    ☐ OTHER \_\_\_\_\_

H&B recommends the exclusive use of 304 or 316 Stainless Steel for stone anchorage.

### PROJECT NAME:

### LOCATION:

### NOTES:

### CONTACT INFO

Name :

Company:

Phone:

Email:

FAX:

Due to fabrication requirements and lead times, once a custom anchor order has been scheduled it cannot be cancelled and will not be returnable. Verify all measurements before signing this form. Any changes after the initial order is placed will require a new signed form, and an additional charge. By signing this document, you agree to the terms stated above and accept full responsibility for the accuracy of measurements.

Orders without a signature will not be processed.

ACCEPTED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

HOHMANN & BARNARD, Inc.  
CORPORATE HEADQUARTERS  
150 Motor Parkway | Suite 410  
Hauppauge, NY 11788  
TF: 800.645.0616 [www.h-b.com](http://www.h-b.com)

Branch/Subsidiary Locations:  
ALABAMA - ILLINOIS  
MARYLAND - NEW YORK - PENNSYLVANIA  
TEXAS - MARYLAND - UTAH - CANADA

© 2013-2023