


STAINLESS STEEL STONE ANCHORS **#439 STONE ANCHOR**

HOHMANN & BARNARD, INC.

The appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other professionals who are familiar with the specific requirements of the project.

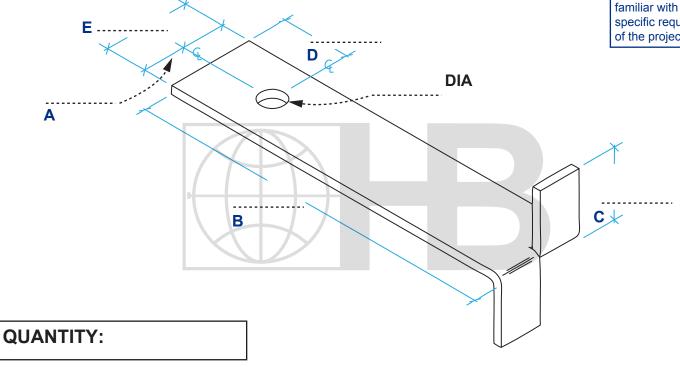

ST/ST Plate Min. Fy. = 45,000 p.s.i. (ASTM A666)

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

FINISH:	THICKNESS:	
TYPE 304 Stainless Steel	12 ga./2.78 mm 3/16"/4.7	mm 3/8"/9.5 mm
TYPE 316 Stainless Steel	1/8"/3.2 mm 1/4"/6.3 n	nm OTHER
H&B recommends the exclusive use of 304 or 316 Stainless Steel for stone anchorage.		
PROJECT NAME:	CONTACT INFO	
LOCATION:	Name:	
NOTES:	Company:	
	Phone:	FAX:
	Email:	
Due to fabrication requirements and lead times, once a custom anchor order has been scheduled it cannot be cancelled and will not be returnable. Verify all measurements before signing this form. Any		rill not be processed.
changes after the initial order is placed will require a and an additional charge. By signing this document, terms stated above and accept full responsibility for the state of the state o	ou agree to the ACCEPTED BY:	
measurements.	DATE:	

HOHMANN & BARNARD, Inc. CORPORATE HEADQUARTERS 150 Motor Parkway | Suite 410 Hauppauge, NY 11788

TF: 800.645.0616 www.h-b.com

Branch/Subsidiary Locations: ALABAMA - ILLINOIS MARYLAND - NEW YORK - PENNSYLVANIA TEXAS - MARYLAND - UTAH - CANADA