


STAINLESS STEEL STONE ANCHORS CONCRETE SCREW

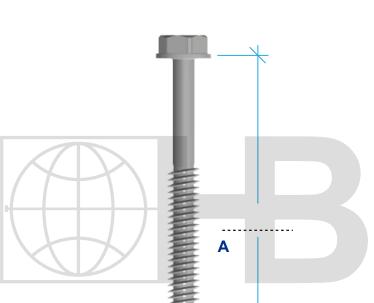

The appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other professionals who are familiar with the specific requirements of the project.

QUANTITY:	· ·	
		DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY
FINISH:		THICKNESS:
TYPE 304 Stainless Steel Zinc Plated		3/16"/4.7 mm 3/8"/9.5 mm
TYPE 410 Stainless Steel Polymer Coated 1/4"/6.3 mm		
Furnished in Type 304 ST/ST, 410 ST/ST Zinc Plated and Polymer Coated.		
DDO JECT NAME.	CONT	ACT INFO
PROJECT NAME:		ACT INFO
LOCATION:	Name	:
NOTES:	Compa	any:
	Phone	: FAX:
	Email:	
Due to fabrication requirements and lead times, oncorder has been scheduled it cannot be cancelled an returnable. Verify all measurements before signing to changes after the initial order is placed will require a	nd will not be Orders withou this form. Any	t a signature will not be processed.

ACCEPTED BY:

DATE: _

HOHMANN & BARNARD, Inc. CORPORATE HEADQUARTERS 150 Motor Parkway | Suite 410 Hauppauge, NY 11788

measurements.

and an additional charge. By signing this document, you agree to the

terms stated above and accept full responsibility for the accuracy of

TF: 800.645.0616 www.h-b.com

Branch/Subsidiary Locations:
ALABAMA - ILLINOIS
MARYLAND - NEW YORK - PENNSYLVANIA
TEXAS - MARYLAND - UTAH - CANADA