




HOHMANN & BARNARD, INC.

## STAINLESS STEEL STONE ANCHORS EMBEDDED CHANNEL STRUT

The appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other professionals who are familiar with the specific requirements of the project.

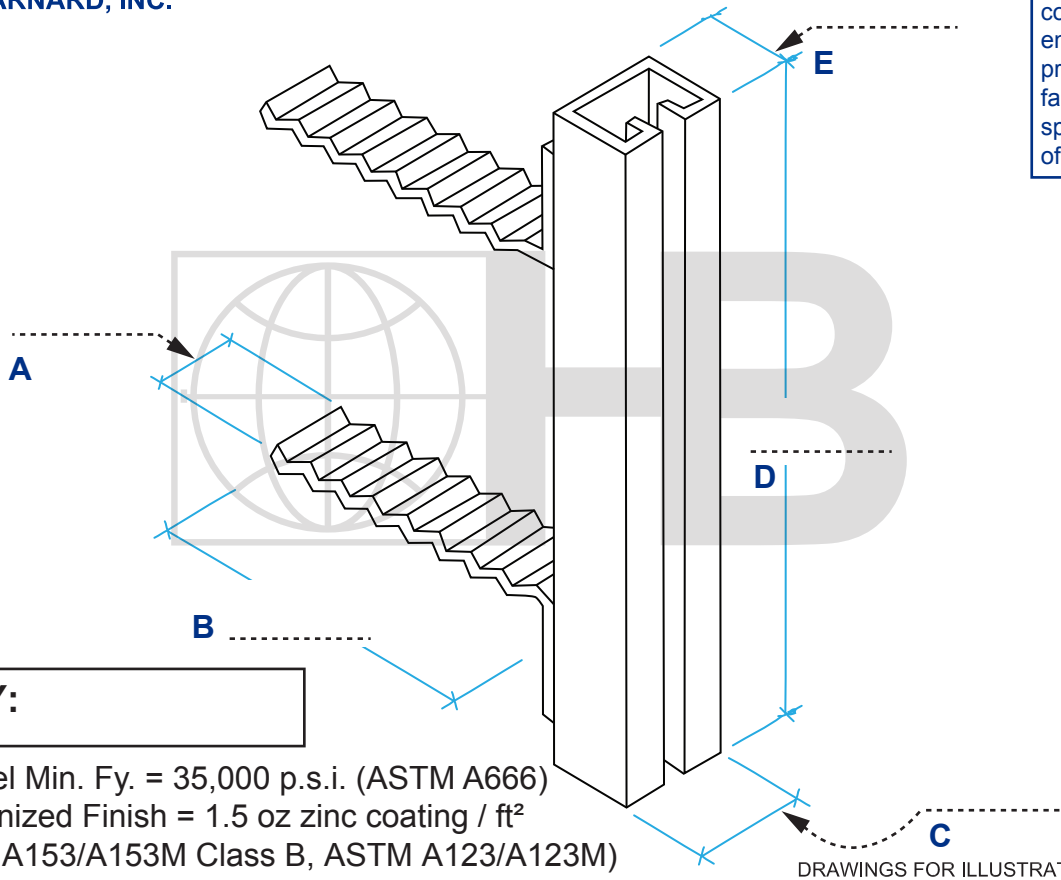

### QUANTITY:

ST/ST Channel Min. Fy. = 35,000 p.s.i. (ASTM A666)  
Hot Dip Galvanized Finish = 1.5 oz zinc coating / ft<sup>2</sup>  
(ASTM A153/A153M Class B, ASTM A123/A123M)

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

### FINISH:

- ☐ TYPE 304 Stainless Steel
- ☐ TYPE 316 Stainless Steel
- ☐ Hot Dip Galvanized

**Contact an H&B technical representative  
for anchor options and additional product information.**

Furnished in Type 304 ST/ST, Type 316 ST/ST, or Hot Dip Galvanized.

### PROJECT NAME:

### LOCATION:

### NOTES:

### CONTACT INFO

Name :

Company:

Phone:

FAX:

Email:

Due to fabrication requirements and lead times, once a custom anchor order has been scheduled it cannot be cancelled and will not be returnable. Verify all measurements before signing this form. Any changes after the initial order is placed will require a new signed form, and an additional charge. By signing this document, you agree to the terms stated above and accept full responsibility for the accuracy of measurements.

**Orders without a signature will not be processed.**

ACCEPTED BY: \_\_\_\_\_

DATE: \_\_\_\_\_

**HOHMANN & BARNARD, Inc.**  
CORPORATE HEADQUARTERS  
150 Motor Parkway | Suite 410  
Hauppauge, NY 11788  
TF: 800.645.0616 [www.h-b.com](http://www.h-b.com)

**Branch/Subsidiary Locations:**  
ALABAMA - ILLINOIS  
MARYLAND - NEW YORK - PENNSYLVANIA  
TEXAS - MARYLAND - UTAH - CANADA

© 2013-2023