


HOHMANN & BARNARD, INC.
a MiTek company

Seismic Anchors and Ties

X-Seal™ S.I.S. Anchor

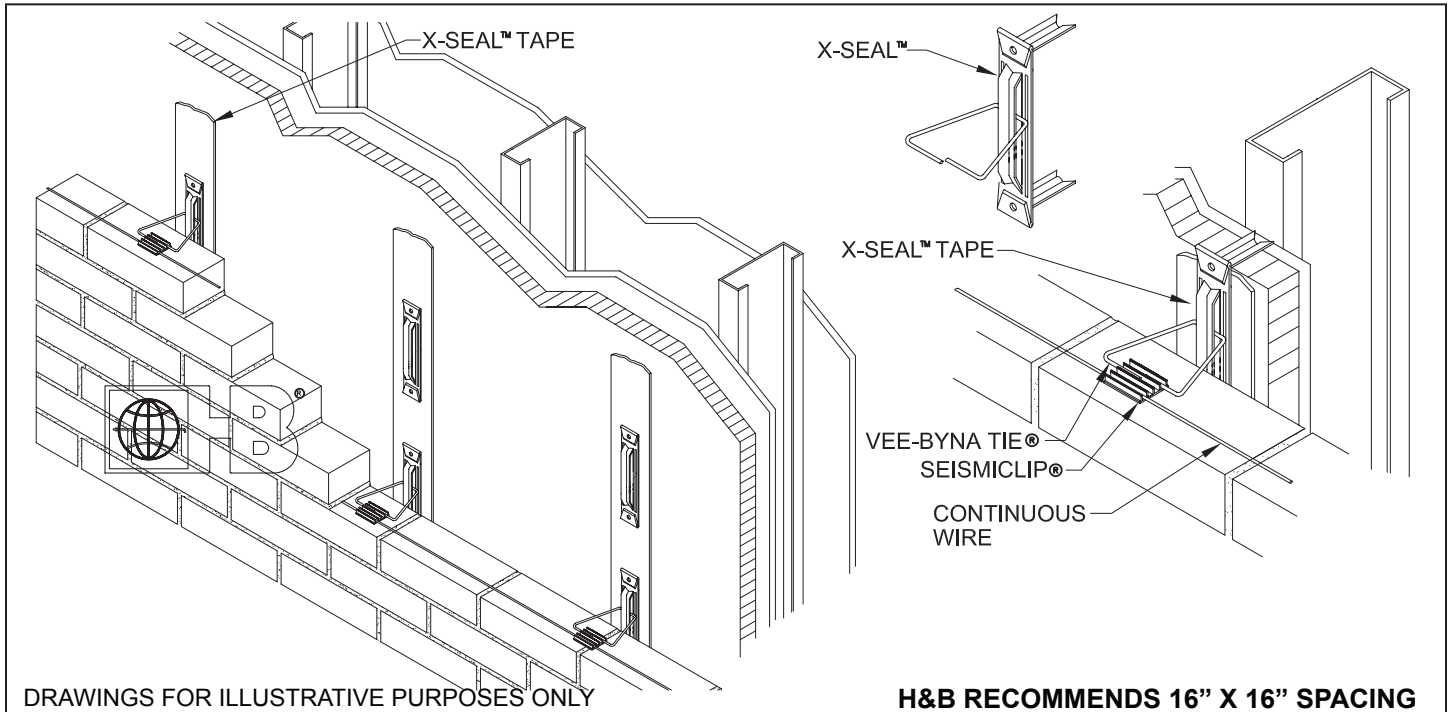

MATERIAL CONFORMANCE

Wire (Carbon Steel): Prefabricated from cold-drawn steel wire conforming to **ASTM A1064/A1064M**
Tensile Strength - 80,000 psi | Yield Point - 70,000 psi minimum
Zinc Coating:
Hot-Dip Galvanized after fabrication: **ASTM A153/A153M-B** (1.5 oz/ft²)
Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft²

Wire (Stainless Steel): **ASTM A580/A580M** - AISI Type 304 or Type 316

Sheet Metal (Carbon Steel): **ASTM A1008/A1008M**
Zinc Coating:
Hot-Dip Galvanized: **ASTM A153/A153M Class B** (1.5 oz/ft²)
(sheet metal ties and anchors galvanized after fabrication)
Note: Hohmann & Barnard will certify to a minimum of 2.0 oz/ft²

Sheet Metal (Stainless Steel): **ASTM A666, ASTM A480/480M, and ASTM A240/A240M** - AISI Type 304 or Type 316

X-Seal™ Tape (reinforced polyolefin base, laminated to a polypropylene layer): **ASTM D751-95, ASTM D4533-91, ASTM G154-98, ASTM E96-B**

Seismicclip®: Impact-resistant, rigid polyvinyl chloride tested in conformance with: ASTM D 1781 (Cell Classification), ASTM D 2240 (Hardness Shore D), ASTM D 638 (Tensile Yield & Modulus), ASTM D 790 (Flexural Strength & Modulus)

X-Seal™ Anchor:
U.S. Patents 6,925,768, 6,941,717, 7,562,506, 7,587,874, 7,845,137
Canadian Patent 2,458,008

Finish:

Hot-Dip Galv. Stainless Steel: Type 304 Type 316

Note: H&B recommends Stainless Steel for maximum protection against corrosion.

Leg Depth (Equal to thickness of wallboard + insulation):

<input type="checkbox"/> X-Seal (1/2")	<input type="checkbox"/> X-Seal (3/4")	<input type="checkbox"/> X-Seal (1")
<input type="checkbox"/> X-Seal (1 1/2")	<input type="checkbox"/> X-Seal (2")	<input type="checkbox"/> X-Seal (2 1/2")
<input type="checkbox"/> X-Seal (2 5/8")	<input type="checkbox"/> X-Seal (3")	<input type="checkbox"/> X-Seal (3 1/2")
<input type="checkbox"/> X-Seal (4")		<input type="checkbox"/> Other _____

Vee Byna-Tie® Diameter:

3/16"Ø (Standard) 1/4"Ø (Heavyweight)

Vee Byna-Tie® Length:

<input type="checkbox"/> 3"	<input type="checkbox"/> 3 1/2"	<input type="checkbox"/> 4"
<input type="checkbox"/> 4 1/2"	<input type="checkbox"/> 5"	<input type="checkbox"/> Other _____

Continuous Wire:

9 gauge 3/16"Ø

X-Seal® Tape: Adhesive backed 3" x 75 ft. rolls
(Seals around the shaft of the screws & legs of X-Seal™ Anchors at the point of penetration)

IMPORTANT: Since each construction project is unique, the appropriate selection and use of any product contained herein must be determined by competent architects, engineers and other appropriate professionals who are familiar with the specific requirements of the project in question. This drawing and/or data sheet is the confidential and proprietary information of Hohmann & Barnard, Inc. and is not to be reproduced, copied or disclosed, in whole or in part, without the prior written consent of H&B.

HOHMANN & BARNARD, Inc.
CORPORATE HEADQUARTERS
30 Rasons Court | Hauppauge, NY 11788
T: 800.645.0616 F: 631.234.0683
www.h-b.com

Branch/Subsidiary Locations:
ALABAMA - ARIZONA - ILLINOIS
MARYLAND - NEW YORK
PENNSYLVANIA - TEXAS - UTAH
CANADA

© 2013-2017 MiTek®