



EdgeSeal is a two-sided, self-adhering roof starter, ideally suited to roof eave and rake edge protection.

FEATURES AND BENEFITS

- ✓ DUAL-SIDED SELF-ADHERING STRIP
- ✓ POLYMER-MODIFIED ASPHALT

GENERAL INFORMATION

ROLLS/BOX	4
ROLLS/PALLET	120
PALLET SIZE	52 x 44 in. (132 x 112 cm)
PRODUCT STOCK NO.	7910070

PRODUCT DIMENSIONS

LENGTH	67.3 linear ft. (20.5 linear m)
WIDTH	8.75 in. (222 mm)
THICKNESS	45.3 mils (1.15 mm)

Product dimensions shown are subject to normal manufacturing tolerances of +/- 0.5 ft. (0.15 m) on the sheet's length and +/- 1/8 in. (3 mm) on width.

FIBERGLASS-REINFORCED SELF-ADHERING MEMBRANE

IKO EdgeSeal roof starter is highly recommended to help prevent wind uplift and blow-off in the critical areas where shingles are most vulnerable – the roof perimeter along the eaves and rakes. Peel the no-stick release film and stick down the IKO EdgeSeal to bond the drip edge, ice and water membrane, and first course of shingles to create a unified barrier against the elements. IKO EdgeSeal comes in 67.3-foot rolls.

Click [here](#) or scan this QR code for product literature.





APPLICABLE STANDARDS¹

ASTM D1970 Product Standard

Miami-Dade Product Approval² [here](#)

Florida Building Code High-Velocity Hurricane Zone (HVHZ) Approval² [here](#)

NOTE: IKO EdgeSeal meets or exceeds the requirements in the product standard referenced at the time of manufacture, including adhesion to plywood, tensile strength, cold flex and minimum tear-strength resistance.


SAFETY INFORMATION

CAUTION: Working at heights on sloped-roof surfaces can be dangerous. Do not install until all appropriate safety precautions are followed. Always wear appropriate personal protective equipment (PPE), including appropriate fall protection equipment.

This product's Safety Data Sheet (SDS) is available [here](#).



INSTALLATION

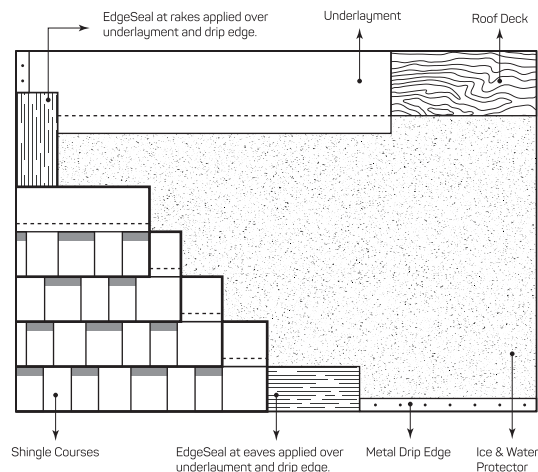

Roof starter must be installed according to all of IKO's application instructions. Some select installation requirements are highlighted here:

1. The space beneath the roof deck (e.g., attic) should be thoroughly ventilated to minimum local building code requirements.
2. Note that EdgeSeal's installation instructions pertain to installing laminated shingles with exposure of 6 inches or less. When using EdgeSeal with 3-tab strip shingles, a secondary starter strip shingle, such as IKO's Leading Edge Plus, or similar, must be the first shingle course applied at the eave edge.
3. In keeping with good roofing practice, apply EdgeSeal when the substrate is dry, and the air temperature is between 45°F and 120°F (7°C and 49°C).
4. Do not remove the top release film before shingles are ready to be applied. Removing the release film from the EdgeSeal too early will diminish its adhesion to shingles.
5. When transitioning from one roll to another along rakes or eaves, overlap a minimum of 6 inches.

Complete product installation details can be found [here](#).



The information on this Technical Data Sheet is based upon data considered to be true and accurate at time of issue, based on laboratory tests and production measurements, and is offered solely for the user's consideration, investigation and verification. Nothing contained herein is representative of a warranty or guarantee for which the manufacturer can be held legally responsible. The manufacturer does not assume any responsibility for any misrepresentation or assumptions the reader may formulate. To confirm the most current product technical information and compliances, please contact IKO directly at: **United States 1-888-IKO-ROOF (1-888-456-7663); Canada 1-855-IKO-ROOF (1-855-456-7663).**

¹Compliance with listed product standards is based on sampling and testing of products as manufactured. ²M-D and FBC HVHZ approvals apply only to products available in the southeast U.S. market. For more information, please contact IKO at: **1-888-IKO-ROOF (1-888-456-7663).**