

HIP & RIDGE CLASS 4 / HIP & RIDGE 12™

Hip & Ridge Class 4 and Hip & Ridge 12 are hip and ridge accessory shingles with robust fiberglass reinforcement, with Class 4 also featuring polymer-modified asphalt for impact resistance.



Fiberglass-Reinforced Asphalt Accessory Shingles

Hip & Ridge Class 4 and Hip & Ridge 12 cap shingles are perforated and tapered to provide three capping pieces from each shingle, offering convenience and efficiency. They are algae-resistant and feature IKO's proprietary FastLock® modified adhesive sealant for maximum wind protection. Additionally, Hip & Ridge Class 4 cap shingles carry a Class 4 Impact Resistance rating for enhanced durability, while Hip & Ridge 12 cap shingles carry a Class 3 Impact Resistance rating.

1 Features and Benefits

- ✓ Class 4 Impact Resistance w/Hip & Ridge Class 4³
- ✓ Class 3 Impact Resistance w/Hip & Ridge 12³
- ✓ Generous Linear Coverage
- ✓ Blue-Green Algae Resistant
- ✓ Proprietary Fastlock Sealant
- ✓ Perforated For Easy Separation
- ✓ Tapered Cut

2 General Information

Shingles/Bundle	26, yielding 78 pieces
Yield/Shingle	3 @ 12 in. (305 mm)
Coverage/Bundle	36.5 linear ft. (11.1 linear m)
Bundles/Pallet	56
Pallet Size	49 x 40 in. (122 x 91 cm)
Product Stock No. (H&R Class 4)	4995XXX
Product Stock No. (H&R 12)	4991XXX & 4993XXX

NOTE: XXX refers to numerical product color code. Product color availability varies by region.

3 Product Dimensions

Shingle Length x Width	36 in. x 13 1/4 in. (914 mm x 337 mm)
Exposure x Width	5 5/8 in. x 12 in. (143 mm x 305 mm)

Product dimensions shown are subject to normal manufacturing tolerances of +/- 1/8 in. (3 mm) on the shingle's length and width.

Click [here](#) or scan this QR code for product literature, color swatches and color availability.



HIP & RIDGE CLASS 4 / HIP & RIDGE 12™

4 Applicable Standards¹

ASTM D3462 Product Standard

ASTM D3018 Product Standard

ASTM D3161 Class F Wind Test

ASTM D7158 Class H Wind Test

ASTM E108 Class A Fire Test²

UL 790 Class A Fire Test²

CAN/ULC S107 Class A Fire Test (Canada)²

FM 4473 Class 4/3 Impact Resistance³

CSA A123.5 Product Standard (Canada)

Miami-Dade Product Approval⁴ [here](#)

Florida Building Code High-Velocity Hurricane Zone (HVHZ) Approval⁴ [here](#)

Texas Department of Insurance Details [here](#)

NOTE: IKO Hip & Ridge Class 4 / Hip & Ridge 12 meets or exceeds the requirements in the product standards referenced at the time of manufacture.


5 Color Pairings

View All Color Pairings on the next page →

6 Safety Information

CAUTION: Working at heights on sloped-roof surfaces can be dangerous. Do not install until all appropriate safety precautions are followed. Always wear appropriate personal protective equipment (PPE), including appropriate fall protection equipment.

7 Shingle Installation

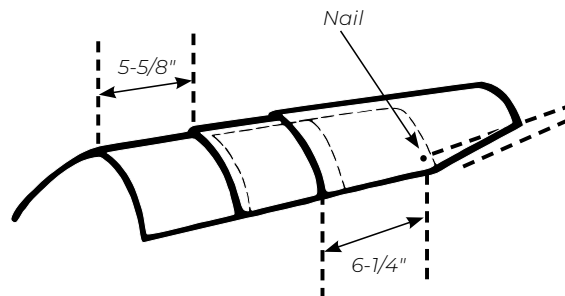

Shingles must be installed according to all of IKO's application instructions. Some select installation requirements are highlighted here:

1. The space beneath the roof deck (e.g., attic) should be thoroughly ventilated to minimum local building code requirements.
2. Shingles should be installed with 5 5/8-inch shingle exposure to the weather.
3. Prior to application in cold weather, storing the shingles in a heated area will allow for easier bending.
4. Cover the exposed nail heads of the final ridge cap shingle with roofing cement.



This product's Safety Data Sheet (SDS) is available [here](#).

Complete product installation details can be found [here](#).



HIP & RIDGE CLASS 4 / HIP & RIDGE 12™

5 Color Pairings

Cambridge / Hip & Ridge 12

- Beachwood*
- Summit Grey/Charcoal Grey
- Dove White*
- Driftwood
- Granite Black/Dual Black
- Dual Brown
- Frostone Grey/Dual Grey
- Earthtone Cedar
- Harvard Slate
- Weatherwood

Royal Estate / Hip & Ridge 12

- Harvest Slate
- Mountain Slate
- Shadow Slate
- Taupe Slate

Nordic / Hip & Ridge Class 4

- Brownstone
- Cornerstone
- Driftshake
- Frostone Grey
- Glacier
- Shadow Black/Granite Black
- Shadow Brown
- Summit Grey

Armourshake

Complementary blend matches for Armourshake Class 4 / Hip & Ridge Class 4

Shadow Black = Shadow Black/Granite Black

Complementary blend matches for Armourshake Class 3 / Hip & Ridge 12

- Shadow Black = Granite Black/Dual Black
- Weathered Stone = Weatherwood
- Greystone = Summit Grey/Charcoal Grey
- Chalet Wood = Driftwood

Dynasty / Hip & Ridge 12

- Atlantic Blue⁵
- Biscayne
- Brownstone
- Cornerstone
- Driftshake
- Emerald Green
- Frostone Grey/Dual Grey
- Glacier
- Granite Black/Dual Black
- Matte Black
- Monaco Red
- Sentinel Slate
- Shadow Brown
- Summit Grey/Charcoal Grey

Crowne Slate / Hip & Ridge 12

- Regal Stone
- Royal Granite

*Available in select markets

The information on this Technical Data Sheet is based upon data considered to be true and accurate at time of issue, based on laboratory tests and production measurements, and is offered solely for the user's consideration, investigation and verification. Nothing contained herein is representative of a warranty or guarantee for which the manufacturer can be held legally responsible. The manufacturer does not assume any responsibility for any misrepresentation or assumptions the reader may formulate. To confirm the most current product technical information and compliances, please contact IKO directly at: **United States 1-888-IKO-ROOF** (1-888-456-7663); **Canada 1-855-IKO-ROOF** (1-855-456-7663).

¹Compliance with listed product standards is based on sampling and testing of products as manufactured. ²When installed over an approved underlayment, in conjunction with an approved IKO shingle. ³The Impact Resistance rating is solely for the purpose of enabling residential property owners using these cap shingles in conjunction with impact resistance rated shingles, to obtain a reduction on their residential insurance premium, if available in their area. It is not to be construed as any type of express or implied warranty or guarantee of the impact performance of this shingle by the manufacturer, supplier or installer, and damage from hail is not covered under the Limited Warranty. For further details concerning the FM 4473 standards, visit the FM Approvals website. ⁴M-D and FBC HVHZ approvals apply only to shingles available in the southeast U.S. market. ⁵Blue granules may fade after extensive exposure to the sun's ultraviolet rays. For more information, please contact IKO at: **1-888-IKO-ROOF** (1-888-456-7663).