

IKO ASPHALT PRIMERS



IKO MOD-BIT PRIMER

- Solvent-based.
- Acceptable surfaces include concrete, masonry, wood, gypsum, metal and asphalt roofing.
- Prepare surfaces for torching and mopping membranes.
- Quick-drying.
- Enhanced membrane adhesion.
- Applied with brush, roller or spray.
- Application temperature > -12°C.
- Coverage approximately 4-7 m²/L (0.4-0.6 gal/100 ft²)*.
- Dry time approximately 1 hour.

IKO STANDARD ASPHALT PRIMER


- Solvent-based.
- Acceptable substrates include concrete, masonry, wood, gypsum, metal and asphalt roofing.
- Prepare surfaces prior to application of hot asphalt.
- Applied with roller, brush or spray.
- Application temperature > -12°C.
- Coverage approximately 1.5-2.4 m²/L (1-1.7 gal/100 ft²)*.
- Dry time approximately 2-4 hours.



IKO SPRAY PRIMER

- Solvent-based.
- Acceptable surfaces include concrete, masonry, wood, gypsum, metal and asphalt roofing.
- 482 g spray aerosol can.
- Application temperature > -10°C.
- Coverage approximately 3m² (32 ft²) per can*.
- Fast-drying - 3 minutes to touch and 60 minutes to complete dry.

* Depending on the porosity of the substrate.

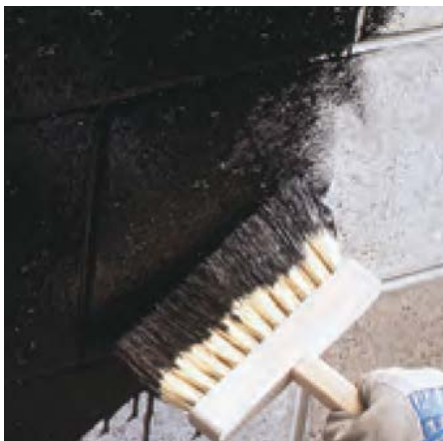

IKO S.A.M. ADHESIVE LVC · ASPHALT PRIMERS