


LEADING EDGE PLUS™

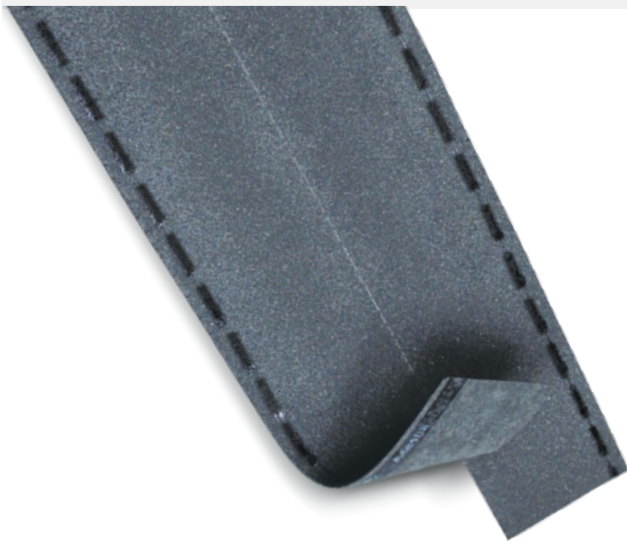

Leading Edge Plus is a fiberglass-reinforced asphalt starter strip shingle.

Fiberglass-Reinforced Asphalt Starter Shingles

IKO's Leading Edge Plus offers the latest evolution in roof starter strips. They're fast, easy and very convenient to apply. The Leading Edge Plus starter strip "shingle" is perforated right down the middle so you can get two starter strips out of each shingle! The FastLock sealant strip along their bottom edge creates a tight seal to protect the overlying shingles against wind damage and reduce shingle blow-offs.

1 Features and Benefits

- ✓ Easy Separation
- ✓ Generous Linear Coverage
- ✓ Proprietary FastLock® Sealant

2 General Information

Shingles/Bundle	16
Starter Strips/Bundle	32 (2 pieces per shingle)
Coverage/Bundle	109 linear ft. (33 linear m)
Bundles/Pallet	54
Pallet Size	40 x 48 in. (102 x 122 cm)
Product Stock No.	4150008

NOTE: Quantities and coverage are subject to change without notice. Please refer to product packaging.

3 Product Dimensions

Length	40 7/8 in. (1,038 mm)
Width Before Separation	15 3/4 in. (400 mm)
Separated Strip Width	7 7/8 in. (200 mm)

Product dimensions shown are subject to normal manufacturing tolerances of +/- 1/4 in. (6 mm) on the shingle's length and +/- 1/8 in. (3 mm) width.

Click [here](#) or scan this QR code for product literature, color swatches and color availability.



LEADING EDGE PLUS™

4 Applicable Standards¹

ASTM D3462 Product Standard

ASTM D3018 Product Standard

ASTM D3161 Class F Wind Test²

ASTM D7158 Class H Wind Test²

ASTM E108 Class A Fire Test²

UL 790 Class A Fire Test²

CAN/ULC S107 Class A Fire Test (Canada)²

Miami-Dade Product Approval³ [here](#)

Florida Building Code High-Velocity Hurricane Zone (HVHZ) Approval³ [here](#)


NOTE: IKO Leading Edge Plus asphalt shingles meet or exceed the requirements in the product standards referenced at the time of manufacture.

5 Safety Information

CAUTION: Working at heights on sloped-roof surfaces can be dangerous. Do not install until all appropriate safety precautions are followed. Always wear appropriate personal protective equipment (PPE), including appropriate fall protection equipment.

6 Shingle Installation

4 Nails for Standard Application

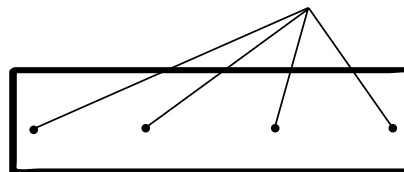

Shingles must be installed according to all of IKO's application instructions. Some select installation requirements are highlighted here.

1. The space beneath the roof deck (e.g., attic) should be thoroughly ventilated to minimum local building code requirements.
2. Remove approximately 20 inches from the first starter strip at the eave prior to installation. This will ensure shingle joints in the starter strip do not align with shingle joints in the first course of IKO's standard laminated asphalt shingles.
3. Ensure the shingles are installed granule side up with the sealant strip located at the outer roof edge (eave or rake).



This product's Safety Data Sheet (SDS) is available [here](#).

Complete product installation details can be found [here](#).



The information on this Technical Data Sheet is based upon data considered to be true and accurate at time of issue, based on laboratory tests and production measurements, and is offered solely for the user's consideration, investigation and verification. Nothing contained herein is representative of a warranty or guarantee for which the manufacturer can be held legally responsible. The manufacturer does not assume any responsibility for any misrepresentation or assumptions the reader may formulate. To confirm the most current product technical information and compliances, please contact IKO directly at: **United States 1-888-IKO-ROOF (1-888-456-7663); Canada 1-855-IKO-ROOF (1-855-456-7663).**

¹Compliance with listed product standards is based on sampling and testing of products as manufactured. ²When starter shingles are installed over an approved underlayment.

³M-D and FBC HVHZ approvals apply only to shingles available in the southeast U.S. market. For more information, please contact IKO at: 1-888-IKO-ROOF (1-888-456-7663).