

# NORDIC™



Nordic is a laminated two-piece, polymer-modified-asphalt shingle, manufactured on a robust fiberglass reinforcement.

## Fiberglass-Reinforced Asphalt Shingles

IKO Nordic performance shingles are among the top-performing asphalt shingles currently available. They're engineered for superior wind and impact resistance, and offer a Class 4 Impact Resistance rating<sup>1</sup>. Their fiberglass mat has an extra-thick coating of polymer-modified asphalt, embedded with algae-resistant granules. Available in a wide range of enhanced color blends, these shingles are made in IKO's special "Advantage" size for full square coverage.

Click [here](#) or scan this QR code for product literature, color swatches and color availability.



### 1 Features and Benefits

- ✓ Polymer-Modified Asphalt
- ✓ Full Square Coverage
- ✓ Blue-Green Algae Resistant
- ✓ ArmourZone Reinforcement
- ✓ Class 4 Impact Resistance<sup>3</sup>

### 2 General Information

Shingles/Bundle	20
Coverage/Bundle	33.3 ft. <sup>2</sup> (3.1 m <sup>2</sup> )
Coverage/Three Bundles	100 ft. <sup>2</sup> (9.29 m <sup>2</sup> )
Bundles/Pallet	56
Pallet Size	40 x 53 1/2 in. (102 x 136 cm)
Product Stock No. (U.S.)	4608XXX
Product Stock No. (Canada)	4609XXX

**NOTE:** XXX refers to numerical product color code. Product color availability varies by region.

### 3 Product Dimentions

Length	40 7/8 in. (1,038 mm)
Width	13 3/4 in. (349 mm)
Exposure	5 7/8 in. (149 mm)

Product dimensions shown are subject to normal manufacturing tolerances of +/- 1/4 in. (6 mm) on the shingle's length and +/- 1/8 in. (3 mm) width.

# NORDIC™

## 4 Applicable Standards<sup>1</sup>

ASTM D3462 Product Standard

ASTM D3018 Product Standard

ASTM D3161 Class F Wind Resistance

ASTM D7158 Class H Wind Resistance

ASTM E108 / UL 790 Class A Fire Resistance<sup>2</sup>

CAN / ULC S107 Class A Fire Resistance (Canada)<sup>2</sup>

CSA A123.5 Product Standard (Canada)

FM 4473 / UL 2218 Class 4 Impact Resistance<sup>3</sup> [here](#)

Miami-Dade County Product Approval<sup>4</sup> [here](#)

Florida Building Code High-Velocity Hurricane Zone (HVHZ) Approval<sup>4</sup> [here](#)

Texas Department of Insurance Details [here](#)

**NOTE:** IKO Nordic asphalt shingles meet or exceed the requirements in the product standards referenced at the time of manufacture.



## 5 Safety Information

**CAUTION:** Working at heights on sloped-roof surfaces can be dangerous. Do not install until all appropriate safety precautions are followed. Always wear appropriate personal protective equipment (PPE), including appropriate fall protection equipment.



This product's Safety Data Sheet (SDS) is available [here](#).

## 6 Shingle Installation

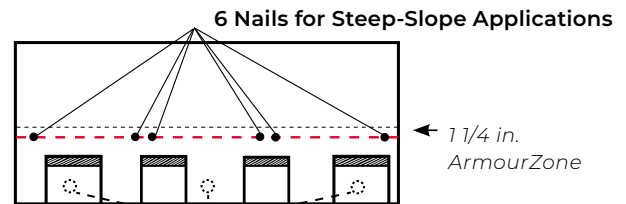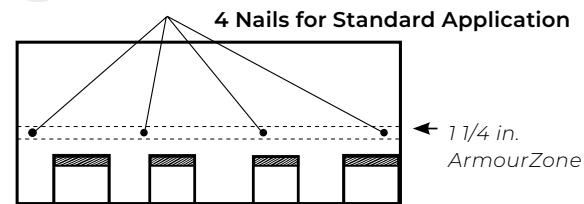

**Apply Roofing Cement** CAUTION: Excessive Use of Roofing Cement Can Cause Shingles to Blister.

**Shingles must be installed according to all of IKO's application instructions. Some select installation requirements are highlighted here.**

1. The space beneath the roof deck (e.g., attic) should be thoroughly ventilated to minimum local building code requirements.
2. Shingles should be installed with 5 7/8-inch shingle exposure to the weather.
3. Offsets between courses are recommended to be 10 inches.
4. Open metal valleys are recommended for best roof system performance.
5. Never apply asphalt shingles to roof slopes less than 2:12. For slopes 2:12 to less than 4:12 (low slope), see special underlayment requirements outlined in the IKO application instructions.



Complete product installation details can be found [here](#).

The information on this Technical Data Sheet is based upon data considered to be true and accurate at time of issue, based on laboratory tests and production measurements, and is offered solely for the user's consideration, investigation and verification. Nothing contained herein is representative of a warranty or guarantee for which the manufacturer can be held legally responsible. The manufacturer does not assume any responsibility for any misrepresentation or assumptions the reader may formulate. To confirm the most current product technical information and compliances, please contact IKO directly at: **United States 1-888-IKO-ROOF (1-888-456-7663); Canada 1-855-IKO-ROOF (1-855-456-7663).**

<sup>1</sup>Compliance with listed product standards is based on sampling and testing of products as manufactured. <sup>2</sup>When shingles are installed over an approved underlayment. <sup>3</sup>The Impact Resistance rating is solely for the purpose of enabling residential property owners to obtain a reduction in their residential insurance premium, if available. It is not to be construed as any type of express or implied warranty or guarantee of the impact performance of this shingle by the manufacturer, supplier or installer, and damage from hail is not covered under the Limited Warranty. For further details concerning the FM 4473 standard, visit the FM Approvals website. For the UL 2218 standard, visit the UL Solutions website.

<sup>4</sup>M-D and FBC HVHZ approvals apply only to shingles available in the southeast U.S. market. For more information, please contact IKO at: 1-888-IKO-ROOF (1-888-456-7663).