


**Case Study: Port Orchard Masonic Temple**

The day after the installation of the new App Roof, [RS-2030](#) Sealer was spray applied at a rate of 250-300 sq. ft/gal. After allowing the RS-2030 Sealer four hours cure time, it was top-coated with [RC-2000](#) White at a rate of 100 sq. ft/gal.

<b>Facility Project</b>	Masonic Temple Port Orchard, WA
<b>Application</b>	Protect New APP Modified Bitumen Roof
<b>Coating</b>	RS-2030 Roofing Sealer and RC- 2000 White
<b>Application Dates</b>	March 25-26, 1996

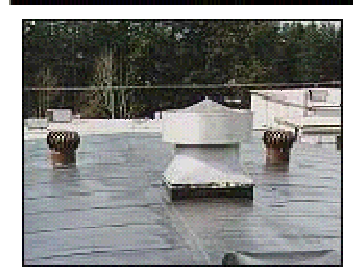

**before**



**after**