

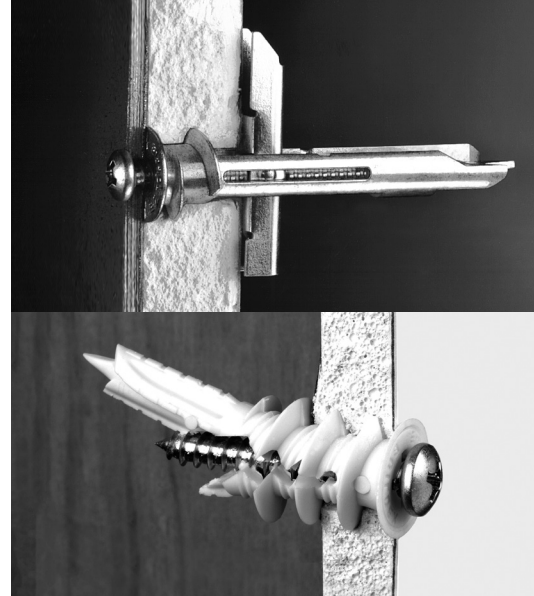
E-Z ANCOR®

SELF-DRILLING DRYWALL ANCHORS







The Original, fast and easy self-drilling anchors. E-Z Zinc, E-Z Stud Solver, E-Z Mini, E-Z Lite, E-Z Plastic Plus, Twist-N-Lock, and E-Z Toggle

PRODUCT FEATURES

- No hole preparation necessary; pre-drills own small precise hole in gypsum wallboard.
- Replaces plastic plugs and toggles.
- Deep thread design provides strong engagement in 3/8", 1/2", and 5/8" gypsum wallboard.
- Installs quickly and easily with a phillips screwdriver or square drive bit.
- Full range of anchors to cover all wall fastening applications.
- Available in corrosion resistant, non-conductive white nylon.
- Can be easily backed-out.
- Low profile head.
- Single point designs for clean cutting installation.
- Stud Solver – attachments through gypsum and wood. Works in double drywall applications, too.



SELECTOR GUIDE

		ANCHOR DESCRIPTION	ANCHOR MATERIAL	PART NO.	QTY	MAXIMUM FIXTURE THICKNESS (IN.)	ACCOMMODATES SHEET METAL SCREW SIZE
LIGHT DUTY	E-Z LITE	 3/8" 1-5/16"	White Nylon	5006902	10 – 100 ct boxes	3/4"	#6
				5006900	Bulk – 10,000 anchors		
	E-Z MINI	 7/16" 1-1/4"	Zinc	5033900	Bulk only – 3,000 anchors	3/4"	#6, #7
MEDIUM DUTY	STUD SOLVER	 1/2" 1-1/8"	Zinc	5052900	Bulk only – 1,500 anchors & screws	3/4"	Use only with #8 screw provided
	E-Z ZINC	 1/2" 1-5/8"	Zinc	5000902	10 – 100 ct boxes	3/4"	#6, #7 or #8
				5000900	Bulk – 1,500 anchors		
	E-Z PLASTIC PLUS	 1/2" 1-5/8"	White Nylon	5035902	10 – 100 ct boxes	3/4"	#6, #7 or #8
				5035900	Bulk – 4,500 anchors		
HEAVY DUTY	E-Z TOGGLE	 9/16" 2-1/2"	Zinc	5061902	10 – 100 ct boxes	1/2"	Use only with #8 screw provided
				5061900	Bulk – 4,500 anchors		
				5014901	50 ct – 50 #8 x 2-1/8" Pan SMS		
				5014900	Bulk – 500 Anchors & Screws		
				5017901	50 ct – 50 #8 x 2-1/8" Large Washer Face SMS		
				5017900	Bulk – 500 Anchors & Screws		

PERFORMANCE DATA

ULTIMATE HOLDING WEIGHT			
ANCHOR TYPE	DRYWALL THICKNESS		
	3/8"	1/2"	5/8"
Light Duty Plastic	25 lbs.	30 lbs.	40 lbs.
Light Duty Zinc	30 lbs.	40 lbs.	50 lbs.
Medium Duty	40 lbs.	50 lbs.	75 lbs.
Twist-N-Lock	65 lbs.	75 lbs.	80 lbs.
Heavy Duty	70 lbs.	85 lbs.	150 lbs.

These performance values are averages obtained under laboratory conditions. Note that these values will change depending on age, moisture content and surface treatment of the drywall (gypsum) material. Appropriate safety factors should be applied to these values for design purposes.

INSTALLATION GUIDELINES

1. Place #2 Phillips screwdriver into recess of E-Z Zinc, E-Z Lite, E-Z Mini, E-Z Stud Solver, Twist-N-Lock, or E-Z Plastic Plus.

2. Press into drywall while turning the anchor clockwise until it is seated flush with wall.

3. Place fixture in position over installed E-Z Zinc, E-Z Lite, E-Z Mini, E-Z Stud Solver, Twist-N-Lock, or Plastic Plus. Insert screw with screw driver. Tighten fixture in place.

* Do Not Use For Mounting Televisions *

1. Using a #2 Phillips screwdriver, screw the E-Z Toggle Anchor into drywall until the head of the anchor is seated flush.

2. To "set" the clamp behind the drywall, place the mounting screw into the anchor and push or tap firmly until approximately 1" of screw is protruding (do not rotate). Then remove the screw.

3. Place fixture over E-Z Toggle, insert screw and continue to turn until fastened tightly (for example when attaching a 1/2" thick fixture, it will require approximately 23 full rotations of the screwdriver to fully tighten the fixture).

* Do Not Use For Mounting Televisions *

