


Tapcon® SCOTS Anchors

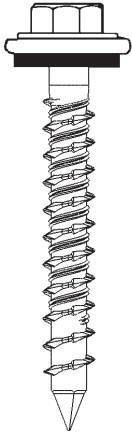

PREMIUM CONCRETE ANCHOR THAT COMBINES THE CORROSION PROTECTION OF STAINLESS STEEL WITH THE PERFORMANCE OF TAPCON ANCHORS.

CORROSION RESISTANCE

Kesternich Results (DIN 50018, 2.0L)
Climaseal™ 30 Cycles - 10% or less red rust

APPROVALS/LISTINGS

ICC Evaluation Service, Inc. – #ESR-1671
 Miami-Dade County – #11-0616.05
 Florida Building Code – #7556.1
For the most current approvals/listings visit:
www.itw-redhead.com

INSTALLATION STEPS

Read installation instructions before using!



WARNING:

If there are any questions concerning proper installation, applications or appropriate use of this product, please call our Technical Services Department at 1-800-899-7890. Failure to follow these instructions can result in serious personal injury.

- Select proper fastener – diameter / head style / length.
 - Use selection chart to choose proper length.
- Drill Hole – use selection chart to determine drill bit length and depth of hole.
 - Choose appropriate drill of Tapcon Anchor.
 - Drill hole minimum ¼" deeper than Tapcon Anchor to be embedded.
 Minimum anchor embedment: 1"
 Maximum anchor embedment: 1-3/4"

3. Drive anchor using DrivTru HWH Socket.	DrivTru PART#	DESCRIPTION	APPLICATIONS
	1513910	DrivTru Socket	All 5/16" across flats HWH fasteners



WARNING:

Failure to wear safety glasses with side shields can result in serious personal injury. Always wear ANSI compliant eye protection (ANSI Z87.1-2003).



WARNING:

Using the wrong size drill bit will affect performance values and may cause failure.

PERFORMANCE TABLES

Tapcon® Anchors Ultimate Tension and Shear Values (Lbs/kN) in Concrete

ANCHOR DIA. In. (mm)	MIN. DEPTH OF EMBEDMENT In. (mm)	f'c = 2000 PSI (13.8 MPa)		f'c = 3000 PSI (20.7 MPa)		f'c = 4000 PSI (27.6 MPa)		f'c = 5000 PSI (34.5 MPa)	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6.4)	1 (25.4)	750 (3.3)	900 (4.0)	775 (3.4)	900 (4.0)	800 (3.6)	1,360 (6.1)	950 (4.2)	1,440 (6.4)
	1-1/4 (31.8)	1,050 (4.7)	900 (4.0)	1,160 (5.2)	900 (4.0)	1,270 (5.6)	1,360 (6.1)	1,515 (6.7)	1,440 (6.4)
	1-1/2 (38.1)	1,380 (6.1)	1,200 (5.3)	1,600 (7.2)	1,200 (5.3)	1,820 (8.1)	1,380 (6.1)	2,170 (9.7)	1,670 (7.4)
	1-3/4 (44.5)	2,020 (9.0)	1,670 (7.4)	2,200 (9.8)	1,670 (7.4)	2,380 (10.6)	1,670 (7.4)	2,770 (12.3)	1,670 (7.4)

Safe working loads for single installation under static loading should not exceed 25% of the ultimate load capacity.

Tapcon® Anchors Ultimate Tension and Shear Values (Lbs/kN) in Hollow Block

ANCHOR DIA. In. (mm)	ANCHOR EMBEDMENT In. (mm)	LIGHTWEIGHT BLOCK		MEDIUM WEIGHT BLOCK	
		TENSION Lbs. (kN)	SHEAR Lbs. (kN)	TENSION Lbs. (kN)	SHEAR Lbs. (kN)
1/4 (6.4)	1 (25.4)	250 (1.1)	620 (2.8)	500 (2.2)	1,000 (4.4)

Safe working loads for single installation under static loading should not exceed 25% of the ultimate load capacity.

NOTE: 3/16" Tapcon requires 5/32" bit, 1/4" Tapcon requires 3/16" bit.

Tapcon® Anchors Allowable Edge and Spacing Distances

PARAMETER	ANCHOR DIA. In. (mm)	NORMAL WEIGHT CONCRETE			CONCRETE MASONRY UNITS (CMU)		
		FULL CAPACITY (Critical Distance Inches)	REDUCED CAPACITY (Minimal Distance Inches)	LOAD REDUCTION FACTOR	FULL CAPACITY (Critical Distance Inches)	REDUCED CAPACITY (Minimal Distance Inches)	LOAD REDUCTION FACTOR
Spacing Between Anchors - Tension	1/4	4	2	0.66	4	2	0.84
Spacing Between Anchors - Shear	1/4	4	2	0.82	4	2	0.81
Edge Distance - Tension	1/4	2-1/2	1-1/4	0.82	4	2	0.88
Edge Distance - Shear	1/4	3	1-1/2	0.59	4	2	0.80

For Sl: 1 inch = 25.4 mm