

SUBMITTAL: GASKETED ACCESS PANEL - AT™ SERIES

This Gasketed Panel is ideal for laboratories, pressurized rooms, dusty or high-moisture environments. The frame and door are specially designed to form a tight seal reducing air infiltration. Minimum sizes: 12" x 12", up to 36" by 36".

Frame & Trim: 16 gauge CRS with 1/2" retainer channel for gasket and 1-1/4" trim flange.
Door: 16 gauge rolled and welded. Cam-operated closure with knurled knob (C5) compresses door tightly to gasket. *We recommend the F2 Flush compression latch for ceiling applications.*
Gasket: Fully gasketed on all sides with EPDM rubber.
Finish: White powder coat paint.



AT Shown with Standard (C5) Knurled Knob & Latch (AT-1212C5G)



STEP 1: SELECT MODEL

- AT Steel
- ATS Stainless Steel (additional cost)
- ATG Galvannealed Steel (additional cost)

STEP 2: SELECT SIZE ON PAGE 2 (ENTER CUSTOM SIZES ON BOTTOM LINE OF CHART)

STEP 3: SELECT NON-STANDARD FRAME AND DOOR OPTIONS AT ADDITIONAL COST:

- 14 gauge door with 16 gauge frame
- 16 gauge door with 14 gauge frame
- 14 gauge door with 14 gauge frame

STEP 4: SELECT OPTIONAL FEATURES AT ADDITIONAL COST:

- Optional color Code: _____ - see page 2
- (F1) Zinc-plated flush latch
- (F2) Zinc-plated flush locking latch
- (C) Cam latch
- (C2) Torx head cam
- (C3) Spanner head cam
- (C4) Hex head cam



AT Shown with Optional Recessed Flush Locking Latch (AT-1212F2W)
 (flush latch recommended for ceiling applications)




LATCH AND LOCK OPTIONS

Flush Latch (F1)	Flush Locking Latch (F2)	Cam Latch (C)	Torx Head Cam (C2)	Spanner Head Cam (C3)	Hex Head Cam (C4)	Standard Knob Cam (C5)

See drawings on page 2

	Distributor:	Quantity:
	Contractor:	Approved By:
	Model #:	Architect:
	Project:	Date: © 2020 Activar Construction Products Group, Inc
HEADQUARTERS: 9702 NEWTON AV S, BLOOMINGTON MN 55431 PH: 800-554-6077 EMAIL: SALES@ACTIVARCPG.COM WWW.ACTIVARCPG.COM MANUFACTURING: BLOOMINGTON, MN & COMMERCE, CA WAREHOUSES: SEE WEBSITE FOR LOCATIONS 4/5/2022		


QTY	Model Size = Door Size Width x Height	Outside Frame Dimensions		Wall Opening Dimensions		Approx- Shipping Weight	Latch (es)
		Width	Height	Width	Height		
	12" x 12"	14-9/16"	14-9/16"	12-1/2"	12-1/2"	7 lbs	1
	18" x 18"	20-9/16"	20-9/16"	18-1/2"	18-1/2"	16 lbs	1
	24" x 24"	26-9/16"	26-9/16"	24-1/2"	24-1/2"	28 lbs	2
	24" x 36"	26-9/16"	38-9/16"	24-1/2"	36-1/2"	42 lbs	2
		--	--	--	--	--	--

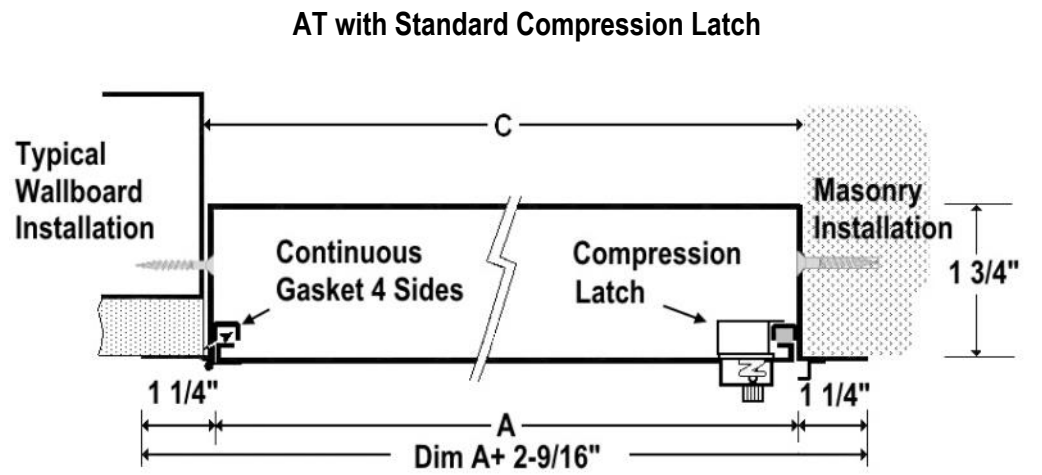

Order Format Example: AT-2424F1W

AT - Width Height Lock (C5 Std or Optional Lock/Latch Code) Color - Options

**AT with Optional Flush Compression Latch
(recommended for ceiling applications)**

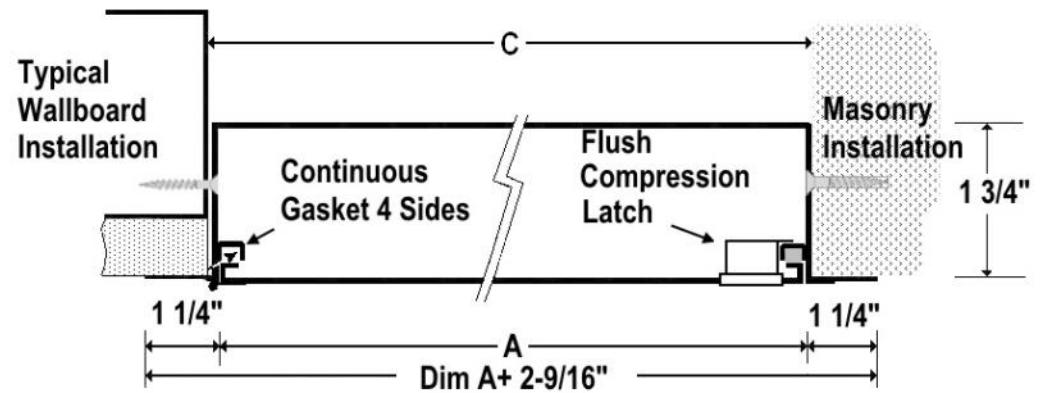

Standard Color is White, Optional Colors at Additional Cost - Samples Available

