

ENTRANCE GRATE - ACTIV-GRATE™ — EG400 SERIES 1/2" ROLL-UP WITH EFRT4 RECESSED THRESHOLD FRAME

The 400 Series grate is designed for heavy-duty, high-traffic areas with a 750 lb wheel load rating. Densely spaced treads provide more surface area than mats, to keep your building cleaner. Contains LDPE hinges to cushion each tread rail that is quieter than aluminum hinges. Grate rolls up compactly for ease of cleaning. Drainage holes between tread rails allows moisture and dirt to fall below mat.

SPECIFICATIONS:

ALUMINUM ROLL-UP ENTRANCE GRATE WITH LDPE HINGES

Material: 6063-T6 extruded aluminum alloy tread rails and frames

Tread Depth: 1/2" (12.7 mm)

Standard Finish: Mill

Tread Spacing: 1-1/2" (38.1 mm) on center with 8 treads per foot in the direction of travel



Spacing Between Rails: Heelproof spacing of 5/32"

Rolling Wheel Load Rating: 750 lbs

NOTES:

- Verify traffic direction - traffic to run perpendicular to rails.
- Maximum single section size not to exceed 12'-0" (3.66m) in width (dim "x") or 100 sq. ft.
- If multiple sections, verify sectioning does not occur in traffic path.
- Vinyl filler on the ends of the traffic directions to be trimmed in field for tight fit.
- Mat dimensions allow for clearance between mat section(s) and frame(s) in width (dim "x").
- Additional product information including installation instructions may be found on our website.

Interpretation of fire and building codes may vary. Consult with the local authority having jurisdiction (AHJ) to determine appropriate standards.

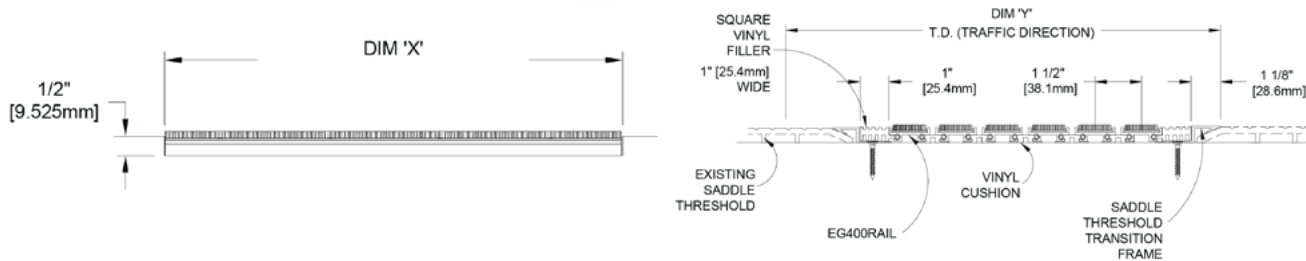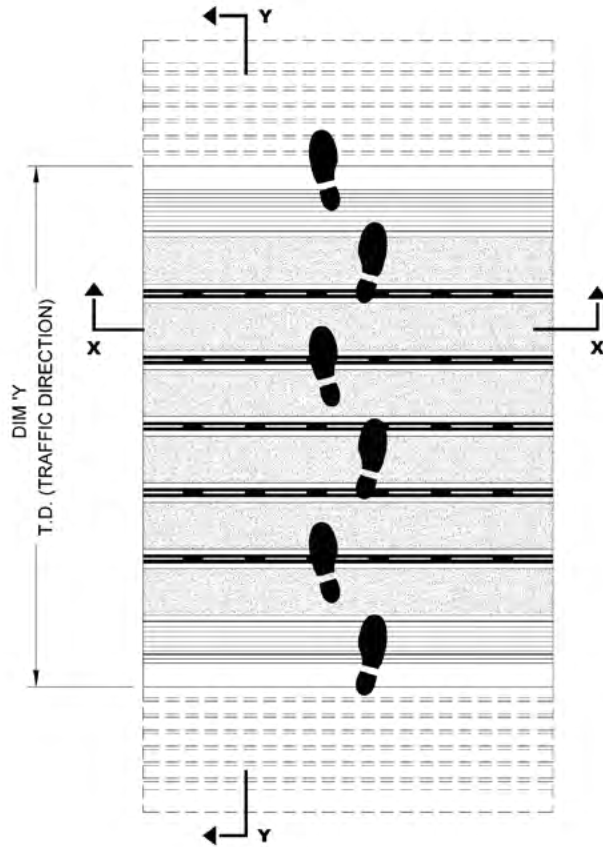

JL INDUSTRIES

9702 Newton Avenue S, Bloomington, MN 55431

800-554-6077


sales@activarcpg.com

www.activarcpg.com


Distributor:		Project:	
Contractor:		Approved By:	
Date:		Architect:	
Scale: N/A	Page 1 of 2	Item#:	

ENTRANCE GRATE - ACTIV-GRATE™ — EG400 SERIES 1/2" ROLL-UP WITH EFRT4 RECESSED THRESHOLD FRAME


ACTIV-GRATE 400 SERIES TREAD OPTIONS




EG400
Premium Carpet



EG401
Serrated Vinyl



EG402
Serrated Aluminum



EG405
Tuff Tread
Polypropylene Carpet

1 - SELECT GRATE OPTIONS

MADE-TO-ORDER ACTIV-GRATE™ EG400 SERIES WITH EFRT4 FRAME - EXAMPLE: EG400M-556509

MODEL OF GRATE	TREAD OPTIONS	RAIL FINISH	- (QTY)	WIDTH	TRAFFIC LENGTH	TREAD COLOR*	CUTOUTS
EG40 Roll up grating	0 Premium Carpet	M Mill				02 Carpet - Silvermine	N Notch Cut
EG41 Roll up grating with alternating tread	1 Vinyl	C Clear Anodized				03 Carpet - Walnut	A Angle Cut
	2 Serrated Aluminum	B Black Anodized				09 Carpet - Pepper	R Radius Cut
	5 Tuff Tread™	L Light Bronze Anodized				21 Vinyl - Black	C Column Cut
		D Medium Bronze Anodized				22 Vinyl - Gray	
		Z Dark Bronze Anodized				23 Vinyl - Brown	
						41 Tuff Tread - Ash	
						42 Tuff Tread - Coal	
						43 Tuff Tread - Mocha	
						Other - Specify below:	

2 - SELECT FRAME OPTIONS

MADE-TO-ORDER ACTIV-GRATE™ EG400 SERIES WITH EFRT4 FRAME


MODEL / FRAME TYPE	FRAME FINISH	- WIDTH	TRAFFIC LENGTH	CUTOUTS
EFRT4 Recessed tapered	M Mill	Size as indicated above		Cutouts as indicated above
	C Clear Anodized			
	B Black Anodized			
	L Light Bronze Anodized			
	D Medium Bronze Anodized			
	Z Dark Bronze Anodized			

*See website for full list of tread colors


NOTE: All selections and options must be identical within the same submittal. Sizing may be different as entered in the width and traffic length columns. Please indicate quantity, which is NOT included in the part number. If other tread options, etc. are needed, then create a new submittal.

EFRT4 FRAME DETAILS

Profile view



Cross section view

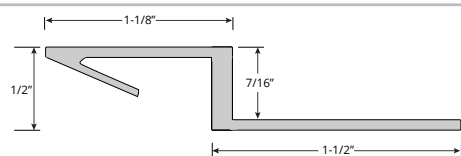

EFRT4: Frame for transition to door threshold. 1/2" (12.7 mm) deep with 1-1/8" (28.6 mm) face and 1-1/2" extension under tread. Extruded aluminum 6063-T5 alloy construction

EFRT4 RECESSED TAPERED FRAME DETAILS

Material: 6063-T5 and 6063-T6 extruded aluminum alloy tread rails and frames

Depth: 1/2" (12.7 mm)

Standard Finish: Mill

Tread Spacing: 1-1/2" (38.1 mm) on center with 8 treads per foot in the direction of travel

Spacing Between Rails: Heelproof spacing of 5/32"

Rolling Wheel Load Rating: 750 lbs

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.