

**ENTRANCE GRATE - Activ-Grate™ EG600 Series with EFRA6 Frame** - Aluminum Grate with Recessed Aluminum Angle Frame

**SPECIFICATIONS:**

**Aluminium Roll-Up Entrance Grate with LDPE Hinges**

**Material:** 6063-T6 extruded aluminum alloy tread rails and frames.

**Depth:** 3/4" (19 mm).

**Standard Finish:** Mill.

**Tread Spacing:** 1 1/2" (38.1 mm) on center with 8 treads per foot in the direction of travel.

**Spacing Between Rails:** Heelproof spacing of 5/32".

**Rolling Wheel Load Rating:** 1000 lbs

**NOTE:**

Verify traffic direction - traffic to run perpendicular to rails.



Maximum single section size not to exceed 12'-0" (3.66m) in width (dim "x") or 100 sq. ft.

If multiple sections, verify sectioning does not occur in traffic path.

Vinyl filler to be trimmed in field for tight fit (n/a for surface mount applications).

Mat dimensions allow for clearance between mat section(s) and frame(s) in width (dim "x").

Additional product information including installation instructions may be found on our website.

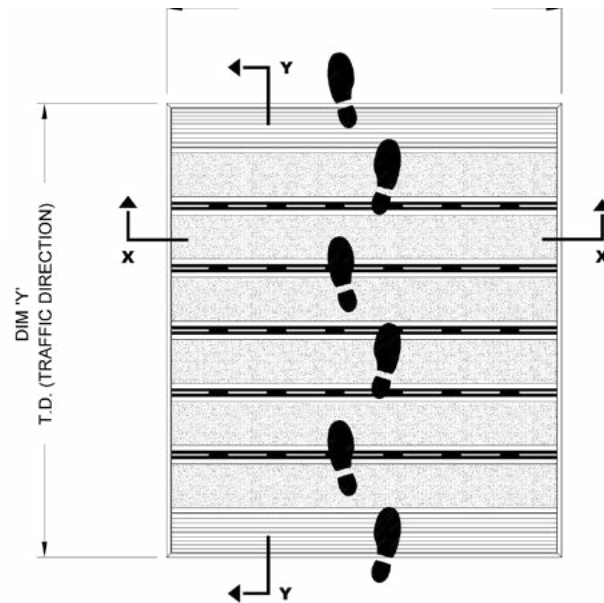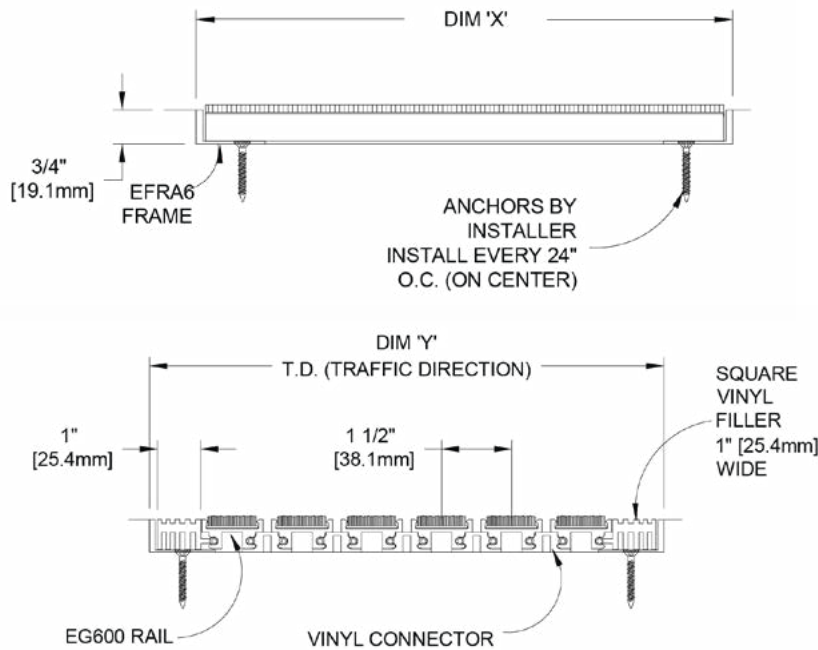

**ACTIV-GRATE 600 SERIES INSERTS**



QTY	LOCATION	DIMENSION "X" <small>Width</small>	DIMENSION "Y" <small>Length</small>	FINISH	TREAD OPTIONS	TREAD COLOR	NOTES



800-554-6077  
 sales@activarcpg.com  
 www.activarcpg.com

9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

Distributor:		Project:
Contractor:		Approved By:
Date:		Architect:
Scale: N/A	Pages: 1 of 1	Item #: