
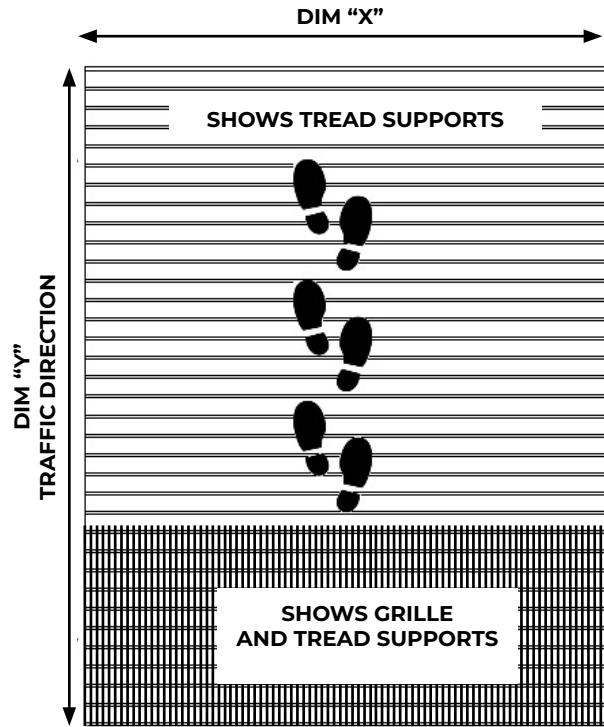


ENTRANCE GRILLE - Activ-Grille™ EG500 Series - Stainless Steel Entrance Grille

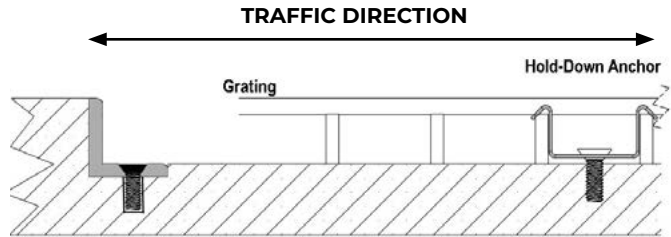

SPECIFICATIONS:

Stainless Steel Entrance Grille

Material: Type 304 stainless steel.

Depth: 3/8" (9.5 mm), 5/8" (15.88 mm) or 1-1/8" (28.58 mm).

Standard Finish: #4 Satin.

Tread Spacing: 2" (50.8 mm) on center with 6 treads per foot in the direction of travel.

Spacing Between Grille: Heelproof spacing of .14" (3.6 mm)

Rolling Wheel Load Rating: 1000 lbs

Grille Sizes:

EG503: 3/8" (9.5 mm) profile (sections up to 7' 8" x 4' 0").

EG508: 5/8" (15.88 mm) profile (sections up to 7' 8" x 4' 0").

EG509: 1-1/8" (28.58 mm) profile (sections up to 8' 10" x 4' 0").

Multiple Sections Can be Combined to Make Sizes to Order

Frame Depths:

EFRA53: 1/2"

EFRA58: 3/4"

EFRA59: 1-1/4"

NOTE:

Verify Traffic Direction - traffic to run perpendicular to grille.

Additional product information including installation instructions may be found on our website.

OPTIONS:

Drain Pan

QTY	LOCATION	DIMENSION "X" Width	DIMENSION "Y" Length	NOTES INCLUDING OPTIONAL FEATURES



800-554-6077
 sales@activarcpg.com
 www.activarcpg.com

9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

Distributor:	Project:
Contractor:	Approved By:
Date:	Architect:
Scale: N/A	Pages: 1 of 1
Item #:	