

ENTRANCE MAT - Activ-Mat™ EM700 Series with EFRT7 Frame - Aluminum Grate with Recessed Threshold Frame

SPECIFICATIONS:

Aluminium Roll-Up Entrance Mat with LDPE Hinges
 Material: 6063-T6 extruded aluminum alloy tread rails and frames.

Depth: 3/8" (9.5 mm).

Frame Width: 1-1/8" (28.6mm)

Standard Finish: Mill.

Tread Spacing: 2" (50.8mm) on center with 6 treads per foot in the direction of travel.

Spacing Between Rails: Heelproof spacing of 3/16"

Rolling Wheel Load Rating: 350 lbs

NOTE:

Verify traffic direction - traffic to run perpendicular to rails.



Maximum single section size not to exceed 12'-0" (3.66m) in width (dim "x") or 100 sq. ft.

If multiple sections, verify sectioning does not occur in traffic path.

Vinyl filler to be trimmed in field for tight fit.

Mat dimensions allow for clearance between mat section(s) and frame(s) in width (dim "x").

Additional product information including installation instructions may be found on our website.

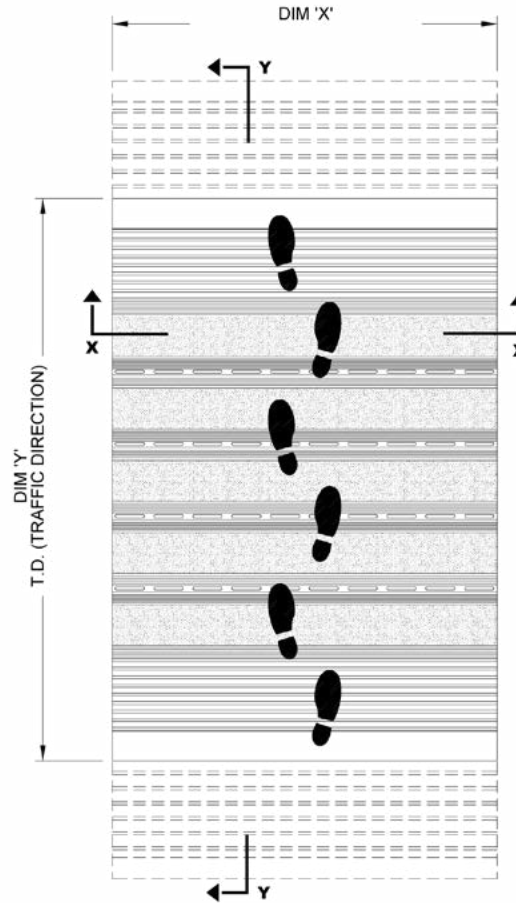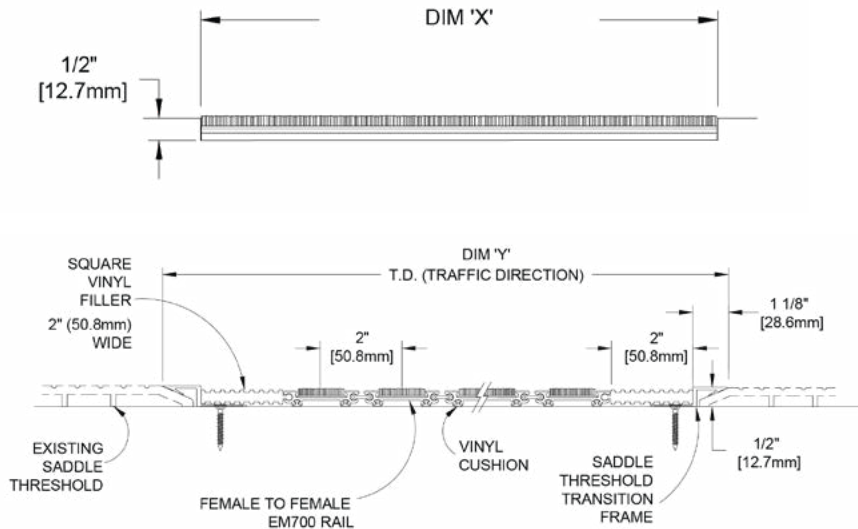

ACTIV-MAT 700 SERIES INSERTS



| QTY | LOCATION | DIMENSION "X" Width | DIMENSION "Y" Length | FINISH | TREAD OPTIONS | TREAD COLOR | NOTES |
|-----|----------|---------------------|----------------------|--------|---------------|-------------|-------|
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |
| | | | | | | | |



JL INDUSTRIES

800-554-6077

sales@activarcpg.com

www.activarcpg.com

9702 Newton Ave S. Bloomington, MN 55431 | Many Locations Nationwide

| | | |
|--------------|---------------|--------------|
| Distributor: | | Project: |
| Contractor: | | Approved By: |
| Date: | | Architect: |
| Scale: N/A | Pages: 1 of 1 | Item #: |