SUBMITTAL: CROWNLINE™ VALVE & HOSE CABINETS - STEEL

PAGE 1 OF 3

Model 6315G10

D - Horizontal duo

V - Vertical duo panel

F - Full glass with pull

Crownline Cabinets Provide A Wide Selection of Door Styles, Glazing and Sizes. These Durable Cabinets are Designed to Industry Standards for Fire Department Valves, Fire Hose Rack Units and Extinguishers.

Door & Trim: Cold rolled steel with white powder coat finish standard. These flush cabinet doors are mounted in a 5/8" door stop, are attached by a continuous hinge and are equipped with zinc-plated handle and roller catch for all non-locking doors. Theft-deterrent SAF-T-LOK™ also available.

Trim Style and Depth: 1-3/4" face trim on frame. *Recessed* - 3/8" flat trimless. *Semi-recessed* - 1-1/4" Square Edge or 2-1/2" Rolled Edge. *Surface mounted* - Square edge. Optional rolled edge see options below. See separate submittal for trimless models with wallboard bead or plaster flange.

Tub: The tub is constructed of cold rolled steel with white powder-coat finish standard.

Knockouts: K.O.'s are provided on both sides of the cabinet. K.O.'s on left side will be located using "J" dimension, K.O.'s on right side using "K" dimension and may be offset from K.O.'s on "J" side of cabinet. Models 6017 & 6217 - Specify K.O. location. Provided on surface mounted cabinets by request, except rolled edge models. Custom location K.O.'s available. See Page 2 for Drawing of K.O. locations.

Special Features: Models 8013, 8014, 8015, 8016 & 8017 have a shelf 12" from the bottom of the cabinet and are designed to hold a fire extinguisher plus fire department valve or other accessory. They can also be ordered without shelf to allow for lower mounting height of valve piping to meet NFPA14.

Fire-Rated Option Available: Yes - See separate submittal.


STEP 1: SELECT MODEL NUMBER, TRIM & QUANTITY (Refer to Chart on Page 2 & 3)


STE	EP 2: SELECT DOOR STYLE		(Check one box below)			Saf-T-Lok nown)	E - Horizontal duo panel with pull and Sat	W - Vertical duo panel with pull and				
	F Full Glazing		L22 Solid with SAF-T-LOK		,	,	-T-Lok. (Not Shown)	Saf-T-Lok. (Not Shown)				
	G Full Glazing with Saf-T-Lok		V Vertical Duo	Г								
	D Horizontal Duo Panel		W Vertical Duo with SAF-T-LOK									
	E Horizontal Duo Panel with SAF-T-LOK		B10 Acrylic View Window with SAF-T-LOK					F2222222222				
	A Center Duo Panel with SAF-T-LOK		L24 Solid with Cylinder Lock & No Handle					0				
	S21 Solid Door		•		J		Tauta					
STE	EP 3: <u>Select door glazing</u>		(Check one box below)									
	10 Clear Acrylic		16 Gray Acrylic	S21	S21 - Solid with pull B10 - Acrylic view A - Horizon							
	13 Clear Wire Glass with Safety Film		17 Clear Tempered Glass	L22		with pull	window with pull, and Saf-T-Lok	A - Horizontal duo pane with pull and Saf-T-Lok				
	15 Bronze Acrylic		18 Laminated Safety Glass	L24	- Solid w key locl	Oui-1-Lok						
						shown)						
STI	EP 4: OPTIONAL FEATURES AT ADDIT <u>i</u>			_								
(Optional Tub Color: BlackRed	PUCI	H Polished Chrome Handle			Black Vertical FE Letters LDCVBFE						
(Optional Color: Red Black Sand	(MC)	Magnetic Catch—Replaces Roller Catch		Red Vertical FE Letters LDCVRFI							
-	AMS Beige SC Flat Beige Gray	FDV	Decal Fire Department Valve Octagonal 6 x 6	•	White Vertical FE Letters LDCVWFE							
	Bronze Silver Flat Black	1403	Decal Fire Hose Black/Red Horiz. Letters 4 x 9		Black Horizontal FE Letters LDCH							
	Rolled Edge on Surface-Mount Model	LDCI	HRFDV-R Diecut Fire Dept. Valve Horiz.10-1/4 x	4-3/8	Red Horizontal FE Letters LDCHRFE							
,	SA Strobe Alarm (surface mount models)	LDC	/RFDV Diecut Fire Dept Valve Vert. 3/4" x 211/2" White Horizontal FE Lett					tters LDCHWFE				
	CA Commander Alarm	LDC	/RFDV-R Diecut Fire Dept Valve Vert. Rever. 3	/4" x 21½"		Etched Glass or Engraved Metal Letter						
I	BA Brigadier Alarm	LDCI	CHRFDV Diecut Fire Department Valve Ascend. 1" x 17" (Check Here and Attach Se					Separate				
	Futura "Fire" HandleMillRedWhite	LDC	/RFSCV-R Diecut Fire Sprinkler Cont. Valve \	/ert 3/4" x	18"	Submit	tal to Order)					
ı	PRH Recessed Pull Handle	Fire H	Hose Racks - See separate submittal			No She	elf for 8000 Serie	S				
			Distributor:	Q	Quantity:							
JL INDUSTRIES			Contractor:			Approved By:						
			Model #:	Ar	Architect:							
©2	2023 Activar Construction Products Grou	P, INC.	Project:	Di	Date:							

HEADQUARTERS: 9702 NEWTON AVE S, BLOOMINGTON, MN 55431 PH: 800-554-6077 EMAIL: SALES@ACTIVARCPG.COM WWW.ACTIVARCPG.COM MANUFACTURING: BLOOMINGTON, MN & COMMERCE, CA WAREHOUSES: SEE WEBSITE FOR LOCATIONS 6/5/2023

SUBMITTAL: CROWNLINE VALVE & HOSE CABINETS - STEEL

PAGE 2 OF 3



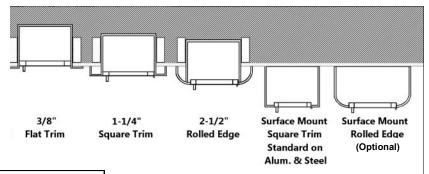


Cabinets in Blue meet ADA 4" Projection Requirement


QTY # TRIM STYLE A B C E F Width Height Depth J G	K FIRE EXTINGUISHERS
Cabinets for Hose Rack & Extinguisher or FD Valve	
	2 1/2 HOSE RACK:
6016 1-1/4" SQUARE EDGE 24 30 6 27 3/8 33 3/8 25 31 4 7/8 2 1/2 4 2	1- 1/2" x 1-1/2" Hose Rack Unit with 50 or 75' Hose
6017 2-1/2" ROLLED EDGE 24 30 6 27 3/8 33 3/8 25 31 3 5/8 Specify When Ord	dering (HRA:050B, 050CH, 075B, 075CH)
6013 SURFACE MOUNTED 27 3/16 33 3/16 6 1/2 27 3/8 33 3/8 Upon Request	& Cosmic 2½ or Galaxy 2½- 5 lb Extinguisher
6215 FLAT TRIM 3/8" 24 34 3/4 6 27 3/8 38 1/8 25 35 3/4 5 7/8 2 1/2 4 2	HOSE RACK:
6216 1-1/4" SQUARE EDGE 24 34 3/4 6 27 3/8 38 1/8 25 35 3/4 4 7/8 2 1/2 4 2	1- 1/2" x 1-1/2" Hose Rack 2 1/2 Unit - 100' Hose
6217 2-1/2" ROLLED EDGE 24 34 3/4 6 27 3/8 38 1/8 25 35 3/4 3 5/8 Specify When Ord	dering (HRA 100B, HRA100CH) & Cosmic 2½ or
6213 SURFACE MOUNTED 27 3/16 37 15/16 6 1/2 27 3/8 38 1/8 Upon Reques	Galaxy 2½- 5 lb Extinguisher
6115 FLAT TRIM 3/8" 24 30 8 27 3/8 33 3/8 25 31 7 7/8 4 4 2	2 1/2 HOSE RACK:
6116 1-1/4" SQUARE EDGE 24 30 8 27 3/8 33 3/8 25 31 6 7/8 4 4 2	2 1/2 2-1/2" x 1-1/2" Hose Rack Unit
6117 2-1/2" ROLLED EDGE 24 30 8 27 3/8 33 3/8 25 31 5 5/8 4 4 2	2 1/2 50 or 75' Hose (HRA050B-2.5, HRA075B-2.5)
6113 SURFACE MOUNTED 27 3/16 33 3/16 8 1/2 27 3/8 33 3/8 Upon Reques	st (1110-030B-2.3, 1110-073B-2.3)
6415 FLAT TRIM 3/8" 24 34 3/4 8 27 3/8 38 1/8 25 35 3/4 7 7/8 4 4 2	2 1/2 HOSE RACK:
	2 1/2 2-1/2" x 1-1/2" Hose
	2 1/2 Rack Unit 100' Hose (HRA100B-2.5)
6413 SURFACE MOUNTED 27 3/16 37 15/16 8 1/2 27 3/8 38 1/8 Upon Reques	st
	2 1/2 HOSE RACK:
	2 1/2 2-1/2" x 1-1/2" Hose
6617 2-1/2" ROLLED EDGE 24 38 3/4 8 27 3/8 42 1/8 25 39 3/4 5 5/8 4 4 2	2 1/2 Rack Unit 125' Hose (HRA125B-2.5)
6613 SURFACE MOUNTED 27 3/16 41 15/16 8 1/2 27 3/8 42 1/8 Upon Reques	st ´
	2 1/2 HOSE RACK & FD VALVE OR EXTINGUISHER:
	2 1/2 1-1/2" OR 2-1/2" Valve
6317 2-1/2" ROLLED EDGE 30 30 8 33 3/8 31 31 5 5/8 4 4 2	2 1/2 50' or 75' Hose Rack Unit Plus FD Valve or Cosmic or
6313 SURFACE MOUNTED 33 3/16 33 3/16 8 1/2 33 3/8 33 3/8 - - Upon Reques	st Galaxy Extinguisher
	HOSE RACK & FD VALVE OR EXTINGUISHER:
	2 1/2 1-1/2" OR 2-1/2" Valve,
6517 2-1/2" ROLLED EDGE 32 3/4 34 3/4 8 36 1/8 38 1/8 33 3/4 35 3/4 5 5/8 4 4 2	2 1/2 100' Hose Rack Unit Plus FD Valve or Cosmic or
	Galaxy Extinguisher
7215 FLAT TRIM 3/8" 32 3/4 38 3/4 8 36 1/8 42 1/8 33 3/4 39 3/4 7 7/8 4 4 2	2 1/2 HOSE RACK & FD VALVE OR EXTINGUISHER:
7216 1-1/4" SQUARE EDGE 32 3/4 38 3/4 8 36 1/8 42 1/8 33 3/4 39 3/4 6 7/8 4 4 2	2 1/2 1-1/2" OR 2-1/2" Valve ,
7217 2-1/2" ROLLED EDGE 32 3/4 38 3/4 8 36 1/8 42 1/8 33 3/4 39 3/4 5 5/8 4 4 2	2 1/2 125' Hose Rack Unit Plus FD Valve or Cosmic or
7213 SURFACE MOUNTED 35 15/16 41 15/16 8 1/2 36 1/8 42 1/8 Upon Reques	

ADA Cabinet Mounting Height: Standard Pull on G, E, W, L22 and B Door Styles with Saf-T-Lok are 3 5/8" Higher than Door Center, so Allow for that When Mounting Cabinet. Standard Pull with No Lock or ADA Recessed Pull are Centered on Door.

SUBMITTAL: CROWNLINE VALVE & HOSE CABINETS - STEEL

PAGE 3 OF 3



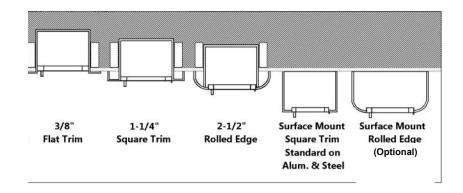

	TRIM & DOOR MATERIAL & SERIES		TUB I.D. W x H x D in Inches			FRAME O.D.		RECESSED WALL OPENING			KNOCKOUT LOCATIONS			RECOMMENDED HOSE RACK ,VALVES &	
QTY	#	TRIM STYLE	Α	В	С	E	F	Width	Height	Depth	J	G	K	EXTINGUISHERS	
		Cabinets for Fire Department Valves													
	8515	FLAT TRIM 3/8"	18	18	8	21 3/8	21 3/8	19	19	7 7/8	4	9	2 1/2	FIRE DEPARTMENT VALVE:	
	8516	1-1/4" SQUARE EDGE	18	18	8	21 3/8	21 3/8	19	19	6 7/8	4	9	2 1/2		
	8517	2-1/2" ROLLED EDGE	18	18	8	21 3/8	21 3/8	19	19	5 5/8	4	9	2 1/2		
	8513	SURFACE MOUNTED	21 3/16	21 3/16	8 1/2	21 3/8	21 3/8	-	-	-	Upon	Req	uest	1-1/2" or 2-1/2"	
	8415	FLAT TRIM 3/8"	18	18	10	21 3/8	21 3/8	19	19	9 7/8	5	9	5	Fire Department Valve with Cap and Chain	
	8416	1-1/4" SQUARE EDGE	18	18	10	21 3/8	21 3/8	19	19	8 7/8	5	9	5	with Cap and Chain	
	8417	2-1/2" ROLLED EDGE	18	18	10	21 3/8	21 3/8	19	19	7 5/8	5	9	5		
	8413	SURFACE MOUNTED	21 3/16	21 3/16	10 1/2	21 3/8	21 3/8	-	-	_	Upon	Request			
	8715	FLAT TRIM 3/8"	26	26	8	29 3/8	29 3/8	27	27	7 7/8	4	13	2 1/2	DUAL OIDE DV OIDE FIDE	
	8716	1-1/4" SQUARE EDGE	26	26	8	29 3/8	29 3/8	27	27	6 7/8	4	13	2 1/2	DUAL SIDE BY SIDE FIRE DEPARTMENT VALVE &	
	8717	2-1/2" ROLLED EDGE	26	26	8	29 3/8	29 3/8	27	27	5 5/8	4	13	2 1/2	EXTINGUISHER OR 2 FIRE DEPARTMENT VALVES:	
	8713	SURFACE MOUNTED	29 3/16	29 3/16	8 1/2	29 3/8	29 3/8	-	-	-	Upon	Req	uest	1-1/2" or 2-1/2" Fire Department Valve with Cap and Chain Plus Cosmic & Galaxy 2½-10 Fire Extinguisher	
	8615	FLAT TRIM 3/8"	26	26	10	29 3/8	29 3/8	27	27	9 7/8	5	13	5		
	8616	1-1/4" SQUARE EDGE	26	26	10	29 3/8	29 3/8	27	27	8 7/8	5	13	5		
	8617	2-1/2" ROLLED EDGE	26	26	10	29 3/8	29 3/8	27	27	7 5/8	5	13	5		
	8613	SURFACE MOUNTED	29 3/16	29 3/16	10 1/2	29 3/8	29 3/8	-	-	_	Upon	Request			
	8015	FLAT TRIM 3/8"	16	40	9	19 3/8	43 3/8	17	41	8 7/8	4 1/4	6	4 1/4	DUAL EXTINGUISHER & FD VALVE CABINET WITH SHELF:	
	8016	1-1/4" SQUARE EDGE	16	40	9	19 3/8	43 3/8	17	41	7 7/8	4 1/4	6	4 1/4		
	8017	2-1/2" ROLLED EDGE	16	40	9	19 3/8	43 3/8	17	41	6 5/8	4 1/4	6	4 1/4	Shelf is 12" from bottom. Cos-	
	8013	SURFACE MOUNTED	19 3/16	43 3/16	9 1/2	19 3/8	43 3/8	-	-	-	Upon	Req	uest	mic or Galaxy Fire Extinguisher	

ADA Cabinet Mounting Height: Standard Pull on G, E, W, A, L22 and B Door Styles with Saf-T-Lok are 3 5/8" Higher than Door Center, so Allow for that When Mounting Cabinet. Standard Pull with No Lock or Doors with Recessed Pull are Centered on Door.

8000 Series can also be ordered without shelf to allow for lower mounting height of valve piping to meet NFPA14.

Cabinets in Blue meet ADA 4" Projection Requirement

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.