

SUBMITTAL: EMBASSY™ FIRE EXTINGUISHER, VALVE & HOSE RACK CABINETS

PAGE 1 OF 2

The Embassy Series is a Decorative, Trimless, Recessed Cabinet Suitable for the Most Upscale Application in our Finest Finishes of Brass, Bronze, Stainless Steel, Aluminum or Painted Steel. All Models Comply with ADA Projection Requirements.

Door & Trim Construction: The 7/8" thick formed cabinet doors are available in #4 satin stainless steel, US10 satin bronze, US3 polished brass, #180 clear anodized aluminum or powder-coated white steel. Doors feature two concealed hinges at top & bottom of door, and roller catch. "V" and "S21" doors can be opened from the bottom of the cabinet using the concealed ABS cup handle in the door. "W" or "L22" door styles have a zinc-plated pull for steel, stainless & aluminum cabinets, or pull of matching material for brass or bronze finishes installed approximately 3/4" above lock which is centered top to bottom on the door (no concealed pull). L24 doors have no pull, and are opened by key only.

Tub: The tub is constructed of cold rolled steel with white powder-coat finish standard. Tub forms a 1" flange to cover cut edges of wallboard material. 5900 has shelf 12" from bottom.

Knockouts: Models designed for use with Fire Department Valves & Hose Racks - 5500: 2 KO's centered on tub, one on each side, or 9" from top, 4" from back. 5800: 2 KO's on left side only, 4" from top and 4" from bottom, 4" from back. 5900: 2 KO's, on each side, 6" from bottom, 4-1/4" from back. 5900 available without shelf to allow for lower mounting height of piping to meet NFPA10 and ADA.

STEP 1: SELECT MODEL NUMBER, MATERIAL AND QUANTITY ON CHART (refer to chart on pg 2)

Determine Tub I.D. according to size most suited for extinguisher and wall opening.

STEP 2: SELECT DOOR STYLE

(Check one box below)

☐ V Vertical Duo with Concealed Pull in Door

☐ S21 Solid with Concealed Pull in Door

☐ L24 Solid Door with Cam Lock & No Pull

☐ W Vertical Duo with SAF-T-LOK™ & Pull Handle

☐ L22 Solid with SAF-T-LOK & Pull Handle

STEP 3: SELECT DOOR GLAZING

(Check one box below)

☐ 10 Clear Acrylic

☐ 16 Gray Acrylic

☐ 13 Clear Wire Glass with Safety Film

☐ 17 Clear Tempered Glass

☐ 15 Bronze Acrylic

☐ 18 Laminated Safety Glass

STEP 4: OPTIONAL FEATURES AT ADDED COST (SELECT ANY)

Door Finish Options - (Specialty Finishes Have Pulls to match)

☐ Dark Bronze Anodized Aluminum Door:

☐ Optional Color— Painted Steel Door; ____ code

☐ ____ #6 ____ #7 ____ #8 Stainless Steel Door

☐ US9 Polished Bronze Door - Clear-coated

☐ US4 Satin Brass Door - Clear-coated

☐ Stainless Steel Tub #4 finish

View Bronze & Brass Finishes Online

Lettering Options

☐ Black Vertical "Fire Extinguisher" Diecut Letters LDCVBFE

☐ Red Vertical "Fire Extinguisher" Diecut Letters LDCVRFE

☐ White Vertical "Fire Extinguisher" Diecut Letters LDCVWFE

☐ Black Horizontal "Fire Extinguisher" Diecut Letters LDCHBFE

☐ Red Horizontal "Fire Extinguisher" Diecut Letters LDCHRFE

☐ White Horizontal "Fire Extinguisher" Diecut Letters LDCHWFE

Other Options

☐ Optional Color Tub ____ Red ____ Black ____ Other Optional Colors

☐ Futura "Fire" Handle ____ Red ____ Mill ____ White

☐ Flush Pull in Center of Door (PRH)

☐ (CA) Commander Alarm


☐ (BA) Brigadier Alarm

☐ Lettering: Etched Glass, Silkscreen, Engraved Door (except Dk Anodized, Bronze or Brass)

Complete & Attach Separate Submittal for Etching or Engraving





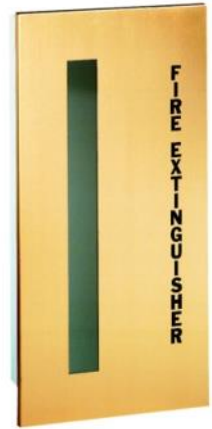


5614W10 Steel with
Pull Handle and Saf-T-Lok



5654V10
Brass With
Concealed Pull

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.

 JL INDUSTRIES	 800-554-6077	Distributor:		Project:
	 sales@activarcpg.com	Contractor:		Approved By:
	 www.activarcpg.com	Date:	Quantity:	Architect:
	9702 Newton Av S. Bloomington, MN 55431 Many Locations Nationwide	Scale: N/A	Pages: 1 of 2	Item #

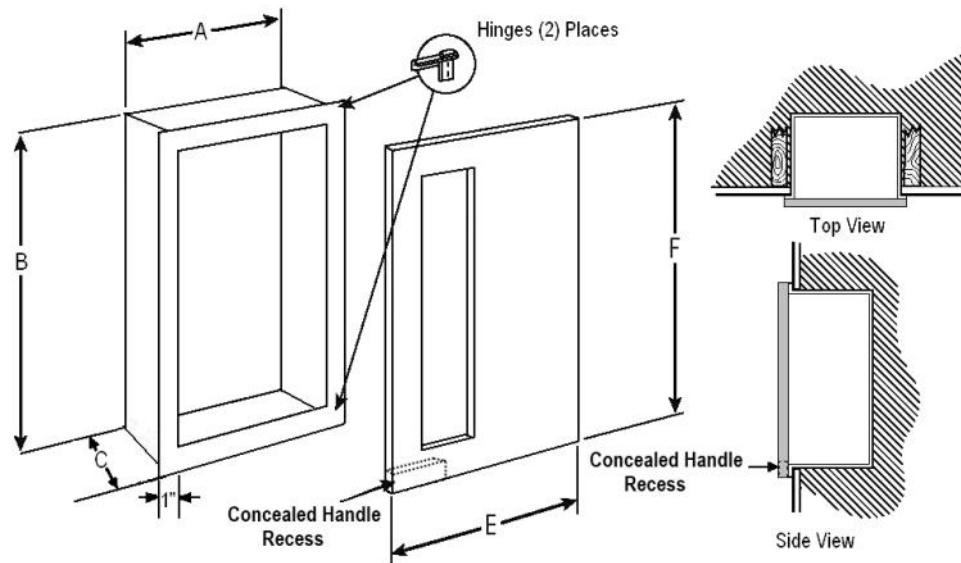

5634S21 Stainless Steel

5744S21 Bronze

TRIM & DOOR MATERIAL & SERIES										TUB I.D. in Inches			DOOR O.D.		WALL OPENING			RECOMMENDED HOSE, RACK & EXTINGUISHER		
QTY	STEEL	QTY	ALUMI- NUM	QTY	STAIN- LESS*	QTY	US 10 BRONZE	QTY	US10B BRONZE	QTY	US 3 BRASS	A	B	C	E	F	W		H	D
FIRE EXTINGUISHER CABINETS																				
	5614		5624		5634		5644		5684		5654	10-1/2	24"	5-3/4	12 3/4	26 1/4	11 1/2	25	5 7/8	Cosmic & Galaxy 2.5-10 Sentinel 5, Mercury 2.5-5
	5714		5724		5734		5744		5784		5754	16	32	7-3/4	18 1/4	34 1/4	17	33	7 7/8	Any **Cosmic, **Galaxy, Mercury, Saturn, Nebu- la or Grenadier P, Sentinel 5-15,
FIRE DEPARTMENT VALVE, HOSE & EXTINGUISHER CABINETS																				
	5514		5524		5534		5544		5584		5554	18	18"	7-3/4	20 1/4	20 1/4	19	19	7 7/8	1-1/2" or 2-1/2" Fire Department Valve. *Left & Right K.O.'s Centered One on each Side or 9" from top, 4" from Bottom & Back.
	5814		5824		5834	—	—	—	—	—	—	32	32	7 3/4	34 1/4	34 1/4	33	33	7 7/8	1-1/2" or 2-1/2" Rack Unit & 2-1/2" Fire Dept Valve or Extinguisher. *2 Left Side K.O.'s 4" from back, top & bottom.
	5914		5924		5934		5944		5984		5954	16	40	8 3/4	18 1/4	42 1/4	17	41	8 7/8	2-1/2" Fire Dept. Valve & Fire Extinguisher. Any Cosmic, Galaxy, Mercury, Saturn or Grenadier P, Sentinel 5-10, Nebula 270 *Left & Right K.O.'s 6" from Bottom & 4-1/4" from Back. Shelf Located 12" From Bottom

ADA Cabinet Mounting Height: Standard pull on W or L22 door styles with Saf-T-Lok are 3 5/8" higher than door center, so allow for that when mounting cabinet. Standard pull with no lock are centered on Door.

**Cosmic & Galaxy 20 must be mounted on the back of the cabinet tub.