


SUBMITTAL: SECURITY ACCESS PANELS - MODEL SP™

Our 10 gauge security access panels provide you with the solid construction and lock options for many detention and security building applications. From the heavy-duty hinges with non-removable barrels to the welded frame construction, we offer a specialty access door to meet your needs.

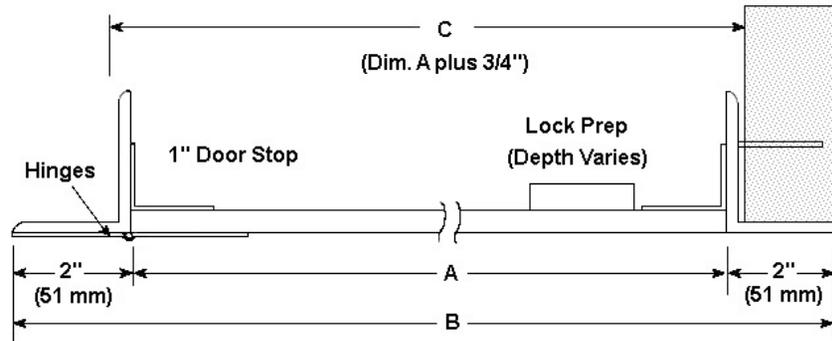

FLAT FRAME STEEL SECURITY PANEL

Frame: 2" x 2" x 3/16" angle frame with 2" flange, welded at corners.

Door: 10 gauge plate steel door mounted on two heavy-duty hinges welded to the frame.

Finish: White powder coat paint.

Anchors: Heavy duty steel masonry anchors welded to frame at factory.

Locks: See page 2 and 3 for lock and prep options.

When door size requires additional anchoring to frame, Torx security screws will be used in addition to the lock selected.

Sizes: Minimum Size 8" x 8" (20.3 x 20.3 cm)

Maximum Size Wall: 48" x 48" (121.9 x 121.9 cm) or other dimensions up to 1296 in² (32.9 cm²).

Maximum Size Ceiling: 24" x 24" (71.1 x 71.1 cm)

Order Size = Door Size

Wall Opening = Order Size Plus 3/4"

WALL AND CEILING SIZES & WALL OPENING TABLE—PLEASE USE SELECTION TABLE PAGE 2, TO ORDER

A - DOOR SIZE W X H Inches (mm)	B - OUTSIDE FRAME DIMENSION in/mm		C - WALL OPENING in/mm		SHIP WT APPROX lb/Kg	LOCK
	WIDTH	HEIGHT	WIDTH	HEIGHT		
08 x 08 (203 x 203)	12 (305)	12 (305)	8 ¾ (222)	8 ¾ (222)	20 (9)	1
10 x 10 (254 x 254)	14 (356)	14 (356)	10 ¾ (273)	10 ¾ (273)	25 (11)	1
12 x 12 (305 x 305)	16 (406)	16 (406)	12 ¾ (324)	12 ¾ (324)	30 (14)	1
14 x 14 (356 x 356)	18 (457)	18 (457)	14 ¾ (375)	14 ¾ (375)	36 (16)	1
16 x 16 (406 x 406)	20 (508)	20 (508)	16 ¾ (425)	16 ¾ (425)	40 (18)	1
18 x 18 (457 x 457)	22 (559)	22 (559)	18 ¾ (476)	18 ¾ (476)	47 (21)	1
24 x 24 (610 x 610)	28 (711)	28 (711)	24 ¾ (629)	24 ¾ (629)	65 (29)	1 lock, 2 security screws
WALL ONLY SIZES						
24 x 36 (61 x 914)	28 (711)	40 (1016)	24¾ (629)	36¾ (933)	90 (41)	1 lock, 6 security screws
24 x 48 (61 x 1219)	28 (711)	52 (1321)	24¾ (629)	48¾ (1238)	112 (51)	1 lock, 6 security screws



9SP-2424DDPI-17W


 JL INDUSTRIES 9702 Newton Av S. Bloomington, MN 55431	800-554-6077 sales@activarcpg.com www.activarcpg.com	Distributor:	Project:	
		Contractor:	Approved By:	
		Date:	Quantity:	Architect:
		Scale: N/A	Pages: 1 of 3	Item #


Example: 9SP-2424MDP-03W

Qty	Material	Width x Height	Lock Type	Powder Coat Paint Color	
<input type="text"/>	9SP Steel 10 ga	8" 8"	MCP	Prepped for Cylinder Lock	<input type="text"/> W White Powder Coat (Std)
<input type="text"/>	9SPSS 304 Stainless #4, 10 ga	10" 10"	MCP-02 Mortise Cam Latch	Installed - Kaba Ilco Cylinder Lock w/Std Cam	<input type="text"/> Other Powder Coat Color Code
		12" 12"		Other: Model & Mfg: _____	
		14" 14"	MDP	Prepped for Cylinder Lock	
		16" 16"	MDP-03 Mortise Deadbolt	Installed - Kaba Ilco Cylinder Lock w/Adams Rite Cam	
		18" 18"	MDP-07	Installed - Temporary Construction Core Best Cylinder w/Std Cam	
		24" 24"		Other: Model & Mfg: _____	
		24" 36"	DSPP-25	Prepped for Airteq 5017 Lock	
		24" 48"	DSPI-25 Detention Slam Lock	Installed - Airteq 5017 Lock	
				Other: Model & Mfg: _____	
			DDPP-17	Prepped for Airteq 5010 Lock	
			DDPI-17 Detention Deadbolt	Installed - Airteq 5010 Lock	
				Other: Model & Mfg: _____	
			MLPP-19	Prepped for Airteq Mogul Lock 5010M	
			MLPI-19 Mogul Detention Deadbolt	Installed - Airteq Mogul Lock 5010M	
				Other: Model & Mfg: _____	

Note: For other locks not listed (prepped or installed), manufacturer may require a sample of the lock. See page 3 for more lock details

CONSTRUCTION DETAIL

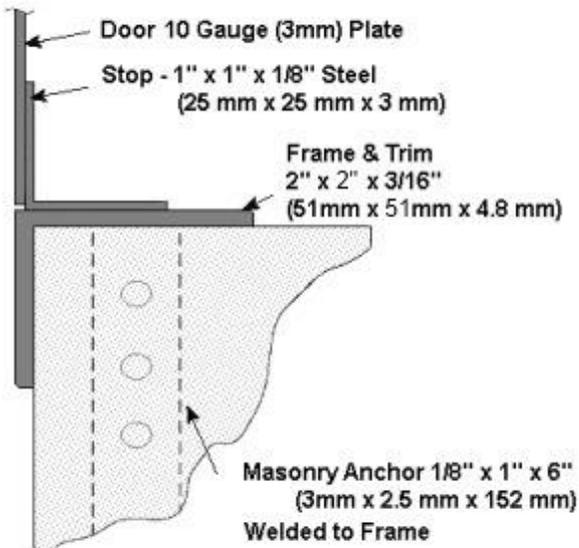



MORTISE CAM LATCH

MCP: Prepped for mortise cylinder lock by others. Cylinder lock must be: 1-1/8" diameter x 1-1/4" long mortise cylinder with standard cam. Cylinders by others require threaded locknut ring.

MCP-02: Includes installed mortise cylinder Kaba Ilco 7205SC1, 1-1/8" Dia x 1-1/4" long mortise cylinder with standard cam (PN: 06431), 2 keys (PN: 06431-KEY) and lock nut ring (PN: 0646).




MORTISE DEADBOLT

MDP: Prepped for mortise deadbolt cylinder lock by others. Cylinder lock must be: 1-1/8" diameter x 1-1/4" long mortise cylinder with Adams Rite cam. Longer lengths require adjustable lock collar (PN: SL-ALC).

MDP-03: Includes installed Kaba Ilco 7205SC2, 1-1/8" x 1-1/4" long mortise cylinder with Adams Rite cam (PN: 06441) and includes 2 keys (PN: 06431-KEY).

MDP-07: Includes installed temporary construction core mortise deadbolt cylinder Best 1E74C181RP3626, 1-1/8" Dia x 1-1/4" long mortise cylinder with C181 Adam Rite cam (PN: SL-1E74). Operation key (PN: 040004) & control key (PN: 040005) to remove the construction core ordered separately.



DETENTION SLAM LOCK

DSPP-25: Prepped for detention slam lock Airteq 5017 with standard bevel by others.

DSPI-25: Includes installed Airteq 5017 medium security for slam-locking with stainless steel latchbolt 1" x 7/16" bolt throw (PN: DDI-5017). Keys sold separately (PN: DDK-5017).



DETENTION DEADBOLT

DDPP-17: Prepped for detention deadbolt lock Airteq 5010. This mounting also accommodates Southern Folger 1010A.

DDPI-17: Includes installed Airteq 5010, medium security deadbolt, with zinc plated steel bolt 1-1/2" x 3/4" and 5/8" bolt throw (PN: DDI-5010). Keys sold separately (PN: DDK-5010).



DETENTION DEADBOLT MOGUL LOCK

MLPP-19: Prepped for detention deadbolt with mogul cylinder Airteq 5010M.

MLPI-19: Includes installed Airteq 5010M medium security deadbolt with mogul key cylinder, zinc plated steel bolt 1-1/2" x 1/2" and 5/8" throw (PN: DDI-5010M). Includes 2 keys (PN: DDK-5010M).

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.