SUBMITTAL: FIRE-RATED FX SECURITY/DETENTION FIRE EXTINGUISHER, VALVE AND HOSE CABINETS PAGE 1 OF 3

JL security and detention cabinets for fire extinguishers, fire hoses or fire department valves are constructed to meet maximum security requirements in areas where fire protection is required. All recessed models have heavy-duty masonry anchors welded to the frame and a wide selection of lock preps and locks.

.

SFXFC-11DSPI-25.A with Optional Detention Deadlock Airteq 5010 Installed **Fire-Rating:** The recessed and semi-recessed Fire-FX[™] cabinets are Intertek listed and labeled as an approved membrane penetration firestop system for up to 2 hours in accordance with ASTM-E814 when properly installed in a wall assembly according to installation instructions. The installation of this fire-rated cabinet which lacks a cabinet door or a condition in which the door is left ajar, will void the fire rating.

SPECIFICATIONS:

Door & Trim: 12 gauge (0.27 cm) steel with white powder coat finish or 14 gauge #4 satin finish stainless door. Flush cabinet doors are mounted in a 5/8" door stop and attached by a heavy-duty continuous hinge.


Trim Style & Depth: 1-1/2" wide trim on frame. Available in *Recessed* with flat trim, *Semi-recessed* with 2-1/2" deep square profile trim.

Tub: FX models feature an inner tub of the same material and finish as the frame surrounded by fire-resistant material, and a painted steel, outer tub. Heavy- duty masonry anchors are provided on recessed & semi recessed models.

Locks: See page 2 and 3 for lock and lock prep choices.

Knockouts: Knockouts are not provided on Fire-Rated Cabinets. Instructions for Knockouts in the field are provided, and must be strictly adhered to, to maintain fire rating.

CABINET DESCRIPTION, SIZE & WALL OPENING TABLE—PLEASE USE SELECTION TABLE ON PAGE 2, TO ORDER													
TRIM & DOOR MATERIAL & SERIES			TUB I.D. W x H x D in Inches			FRAME O.D. W x H Inches		WALL OPENING FIRE-RATED FX			SHIP WT	RECOMMENDED HOSE,	
STEEL	STAINLESS	TRIM STYLE	Α	В	С	Е	F	Width	Height	Depth	lbs	RACK & EXTINGUISHER	
SECURITY FIRE EXTINGUISHER CABINETS (SFC)													
SFXFC-11	SSFXFC-31	Flat Trim	10-½	24	7	13-½	27	12-½	26-½	8	41	Cosmic & Galaxy 2.5-10, Mercury 2.5-5, Sentinel 5	
SFXFC-12	SSFXFC-32	2-1/2" Square Trim	10-½	24	7	13-½	27	12-½	26-½	5-1⁄2	45		
SFXFC-15	SSFXFC-35	Flat Trim (Lg Tub)	12	27	8-1⁄2	15	30	14	29-1⁄2	10	54	Any Cosmic, Galaxy, Mercury, Saturn 15,	
SFXFC-16	SSFXFC-36	2-½" Square Trim (Lg Tub)	12	27	8-1⁄2	15	30	14	29-½	7-1⁄2	56	Sentinel 5	
				SECU	RITY V	ALVE CAB	INETS (SVC)					
SFXVC-11	SSFXVC-31	Flat Trim	18	18	8-1⁄2	21	21	20	20-1⁄2	9-1⁄2	53	1-½" or 2-½" Fire	
SFXVC-12	SSFXVC-32	2-½" Square Trim	18	18	8-1⁄2	21	21	20	20-1⁄2	7	54	Department Valve	
SECURITY HOSE CABINETS (SHC)													
SFXHC-11	SSFXHC-31	Flat Trim	32-¾	34-¾	8	35-¾	37-¾	34-¾	36-¾	9	132	1-½" or 2-½" Hose Rack, & Extinguisher, or F.D.	
SFXHC-12	SSFXHC-32	2-½" Square Trim	32-¾	34-¾	8	35-¾	37-¾	34-¾	36-¾	6-1⁄2	157	Valve & Extinguisher	





All Models meet the 4" ADA projection requirement

	800-554-6077	Distributor:		Project:		
JL INDUSTRIES	sales@activarcpg.com	Contractor:		Approved By:		
	www.activarcpg.com	Date:	Quantity:	Architect:		
9702 Newton Av S. Bloomington, MN 55431		Scale: N/A	Pages: 1 of 3	Item #		
@ 2023 Activar Construction Products Group, Inc. The information contained in this document is the sole property of Activar Construction Products Group, Inc. Any reproduction in part of as a whole without the written permission of Activar Construction Products Group, Inc. is prohibited.						

SUBMITTAL: FIRE-RATED FX SECURITY/DETENTION FIRE EXTINGUISHER, VALVE AND HOSE CABINETS PAGE 2 OF 3

Select Material, Series, Finish & Trim Style Below - Example SFXFC-11MCP-02.B.1

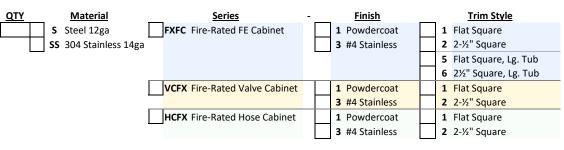




TYPICAL FIRE-RATED INSTALLATION

Select Lock Type & Prep, Finish Color, Silkscreen or Engraved Lettering


Lock Type		. Finish Co	lor .	<u>Opti</u>	onal Silkscre	en/Engraved Lettering (Stainless—Engraving Only)
MCP F	Prepped for Cylinder Lock	Α	White (Std)		1 ENFELVB	Engraving, Fire Extinguisher Lettering, Vertical, Black
MCP-02 Mortise Cam Latch I	Installed - Kaba Ilco Cylinder Lock w/Std Cam	В	Black		2 ENFELVR	Engraving, Fire Extinguisher Lettering, Vertical, Red
	Other: Model & Mfg	С	Red		3 SSFELVB	Silk Screen, Fire Extinguisher Lettering, Vertical, Black
MDP F	Prepped for Cylinder Lock	D	Stainless		4 SSFELVR	Silk Screen, Fire Extinguisher Lettering, Vertical, Red
MDP-03 Mortise Deadbolt	Installed - Kaba Ilco Cylinder Lock w/Adams Rite Cam		Other Color		5 ENFELVW	Engraving, Fire Extinguisher Lettering, Vertical, White
MDP-07	Installed - Temporary Construction Core Best Cylinder w/Std Cam		_		6 SSFELVW	Silk Screen, Fire Extinguisher Lettering, Vertical, White
	Other: Model & Mfg				7 SSFELHR	Silk Screen, Fire Extinguisher Lettering, Horizontal, Red
DSPP-25	Prepped for Airteq 5017 Lock				8 SSFELHB	Silk Screen, Fire Extinguisher Lettering, Horizontal, Black
DSPI-25 Detention Slam Lock I	Installed - Airteq 5017 Lock				9 SSFELHW	Silk Screen, Fire Extinguisher Lettering, Horizontal, White
	Other: Model & Mfg:					
DDPP-17	Prepped for Airteq 5010 Lock					
DDPI-17 Detention Deadbolt I	Installed - Airteq 5010 Lock					
	Other: Model & Mfg:					
MLPP-19 Maguil Datantian	Prepped for Airteq Mogul Lock 5010M					
Mogul Detention	Installed - Airteq Mogul Lock 5010M					
Deadbolt	Other: Model & Mfg:					

Note: For other locks not listed (prepped or installed), manufacturer may require a sample of the lock. See page 3 for more lock details

Additional Accessories, Sold Separately (see separate submittal)

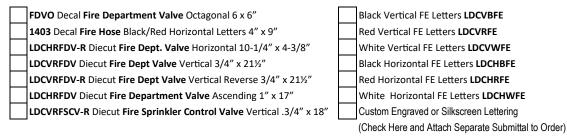

SUBMITTAL: FIRE-RATED FX SECURITY/DETENTION FIRE EXTINGUISHER, VALVE AND HOSE CABINETS PAGE 3 OF 3





MORTISE CAM LATCH

MCP: Prepped for mortise cylinder lock by others. Cylinder lock must be: 1-1/8" diameter x 1-1/4" long mortise cylinder with standard cam. Cylinders by others require threaded locknut ring.

MCP-02: Includes installed mortise cylinder Kaba Ilco 7205SC1, 1-1/8"Dia x 1-1/4" long mortise cylinder with standard cam (PN: 06431), 2 keys (PN: 06431-KEY) and lock nut ring (PN: 0646).


MORTISE DEADBOLT



MDP: Prepped for mortise deadbolt cylinder lock by others. Cylinder lock must be: 1-1/8" diameter x 1-1/4" long mortise cylinder with Adams Rite cam. Longer lengths require adjustable lock collar (PN: SL-ALC).

MDP-03: Includes installed Kaba IIco 7205SC2, 1-1/8" x 1-1/4" long mortise cylinder with Adams Rite cam (PN: 06441) and includes 2 keys (PN: 06431-KEY).

MDP-07: Includes installed temporary construction core mortise deadbolt cylinder Best 1E74C181RP3626, 1-1/8" diameter x 1-1/4" long mortise cylinder with C181 Adam Rite cam (PN: SL-1E74). Operation key (PN: 040004) & control key (PN: 040005) to remove the construction core ordered separately.





DETENTION SLAM LOCK

DSPP-25: Prepped for detention slam lock Airteq 5017 with standard bevel by others. **DSPI-25:** Includes installed Airteq 5017 medium security for slam-locking with stainless steel latchbolt 1" x 7/16" bolt throw (PN: DDI-5017). Keys sold separately (PN: DDK-5017).



DETENTION DEADBOLT

DDPP-17: Prepped for detention deadbolt lock Airteq 5010. This mounting also accommodates Southern Folger 1010A. **DDPI-17:** Includes installed Airteq 5010, medium security deadbolt, with zinc plated steel bolt 1-1/2" x 3/4" and 5/8" bolt throw (PN: DDI-5010). Keys sold separately (PN: DDK-5010).



DETENTION DEADBOLT MOGUL LOCK

MLPP-19: Prepped for detention deadbolt with mogul cylinder Airteq 5010M. **MLPI-19:** Includes installed Airteq 5010M medium security deadbolt with mogul key cylinder, zinc plated steel bolt 1-1/2" x 1/2" and 5/8" throw (PN: DDI-5010M). Includes 2 keys (PN: DDK-5010M).

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.