

SUBMITTAL: MODEL TM™ FLUSH ACCESS PANELS

Model TM is an all-purpose 16 gauge cold rolled steel access door that affords fast and convenient access for inspection or service to vital components of plumbing, heating, air conditioning and/or electrical systems. The 1" frame flange adds rigidity and conceals the rough wall or ceiling openings. The concealed hinged door is mounted to the frame and swings open for ease in servicing, resulting in a door that always closes squarely in place.

SPECIFICATIONS

Frame: 16 gauge steel with 1" flange.

Door: 16 gauge steel.

Finish: White powder coat paint.

Lock: Flush screwdriver-operated steel cam "C" with 1 or more on each side.

Sizes: Wall - Minimum 6" x 6", Maximum 48" x 48". Ceiling - Minimum 6" x 6", Maximum 36" x 36". See the CAP Ceiling Panel Series if larger sizes are needed.



STEP 1: SELECT MODEL FROM PAGE 2 OR ENTER SIZE:

For sizes not shown on chart. " W x " H (See sizes above)

STEP 2: SELECT NON-STANDARD FRAME AND DOOR OPTIONS AT ADDITIONAL COST (TM models only):

- H1 Cold Rolled Steel 14 gauge door with 16 gauge frame
- H4 Cold Rolled Steel 16 gauge door with 14 gauge frame
- H14 Cold Rolled Steel 14 gauge door with 14 gauge frame

STEP 3: SELECT OPTIONS AT ADDITIONAL COST (TM models only)

- ☐ Plexiglass View Window
- ☐ (R) Rain Hood
- ☐ (K) Gasketing
- ☐ Removable Door with no hinges
- ☐ Optional Color Code See page 2
- ☐ (L) Cylinder lock installed
- ☐ (M1) Mortise cam lock prep 1-1/8" dia, 1-1/4" length
- ☐ #0646 Brass Retaining Ring for M1 -may be required for locks by others
- ☐ (M2) Mortise cam lock (06431) installed
- ☐ (U3) Mortise slam lock prep
- ☐ (U4) Mortise slam lock (06431) installed
- ☐ (B1) Mortise deadbolt prep
- ☐ (B2) Mortise deadbolt lock (06441) installed
- ☐ (C5) Knob cam
- ☐ (C2) Torx head cam View Lock Options Online
- ☐ (C4) Hex head cam
- ☐ (C3) Spanner head cam
- ☐ Other 1-1/8" dia. mortise cylinder by request:



Standard Cam Latch


LATCH AND LOCK OPTIONS (TM Models only)					
Mortise Lock (M2)(U4)(B2)	Cylinder Lock (L)	Torx Head Cam (C2)	Spanner Head Cam (C3)	Hex Head Cam (C4)	Knob Cam (C5)

See Separate Submittal for: Galvanized, Stainless Steel , Double Door Panels or Louvered Vents

JL INDUSTRIES 9702 Newton Av S. Bloomington, MN 55431 Many Locations Nationwide	800-554-6077 sales@activarcpg.com www.activarcpg.com	Distributor:	Project:
		Contractor:	Approved By:
		Date:	Architect:
		Scale: N/A Pages: 1 of 2	Item #
@ 2025 Activar Construction Products Group, Inc.		THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. ANY REPRODUCTION IN PART OF AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF ACTIVAR CONSTRUCTION PRODUCTS GROUP, INC. IS PROHIBITED.	

SUBMITTAL: MODEL TM™ FLUSH ACCESS PANELS

Qty	MODEL*	A-Door Size W X H	B-Outside Frame Dimensions 1" Trim Flange		C-Opening Dimensions Fits ± 1/8" Opening Size		Approx. Ship Wt. (lbs)	Latch (es)
			Width	Height	Width	Height		
	TM-0606	6" x 6"	8"	8"	6 1/2"	6 1/2"	3	1
	TM-0808	8" x 8"	10"	10"	8 1/2"	8 1/2"	4	1
	TM-0812	8" x 12"	10"	14"	8 1/2"	12 1/2"	5	1
	TM-1010	10" x 10"	12"	12"	10 1/2"	10 1/2"	5	1
	TM-1212	12" x 12"	14"	14"	12 1/2"	12 1/2"	5	1
	TM-1216	12" x 16"	14"	18"	12 1/2"	16 1/2"	8	1
	TM-1218	12" x 18"	14"	20"	12 1/2"	18 1/2"	9	1
	TM-1224	12" x 24"	14"	26"	12 1/2"	24 1/2"	11	2
	TM-1414	14" x 14"	16"	16"	14 1/2"	14 1/2"	8	1
	TM-1616	16" x 16"	18"	18"	16 1/2"	16 1/2"	10	1
	TM-1620	16" x 20"	18"	22"	16 1/2"	20 1/2"	11	2
	TM-1818	18" x 18"	20"	20"	18 1/2"	18 1/2"	11	3
	TM-2024	20" x 24"	22"	26"	20 1/2"	24 1/2"	16	4
	TM-2030	20" x 30"	22"	32"	20 1/2"	30 1/2"	19	4
	TM-2222	22" x 22"	24"	24"	22 1/2"	22 1/2"	16	4
	TM-2230	22" x 30"	24"	32"	22 1/2"	30 1/2"	20	4
	TM-2236	22" x 36"	24"	38"	22 1/2"	36 1/2"	24	5
	TM-2424	24" x 24"	26"	26"	24 1/2"	24 1/2"	18	4
	TM-2430	24" x 30"	26"	32"	24 1/2"	30 1/2"	22	5
	TM-2436	24" x 36"	26"	38"	24 1/2"	36 1/2"	25	5
	TM-3030	30" x 30"	32"	32"	30 1/2"	30 1/2"	36	5
	TM-3636	36" x 36"	38"	38"	36 1/2"	36 1/2"	35	5
Other sizes may be ordered in 1/4" increments on blank line above e.g. 16-3/4", 16-1/2" or 16-3/8"								
Wall maximum 48" x 48", Ceiling maximum 36" x 36". See the CAP Series for larger sizes.								

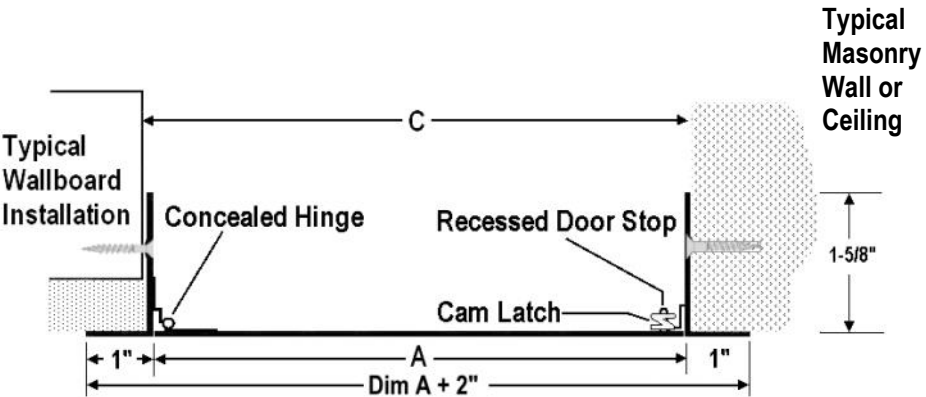

Many of our models are available for quick shipment from one of our warehouses—see stock list

ORDER GUIDE

MODEL DESCRIPTION		MATERIAL	WIDTH HEIGHT		LATCHES		FINISH		OPTIONS	
TM	Standard	Steel	8"	8"	C	Standard Cam Latch	W	White Powder Coat (Std)		None
TMW	Wallboard	G Galvannealed Steel	10"	10"	L	Cylinder Lock Installed		Other Powder Coat Color Code	H16	14g Door/16 g Frame
TMP	Plaster	S Stainless	12"	12"	M1	Mortise Cam Lock Prep			H4	16 g Door/14 g Frame
TME	Extended Plaster		14"	14"	M2	Mortise Cam Lock Installed			H14	14 g Door/14 g Frame
			16"	16"	C5	Knurled Knob Cam			D	Double Doors
			18"	18"	C3	Spanner Head Cam			K	Gasketing
			22"	30"					R	Rainhood
			24"	24"						
			24"	36"						
			30"	30"						
			Other	Other						

It is the responsibility of the customer to communicate specifications and product performance requirements that are needed for their application. This document is intended to convey potential product configurations and offerings. It is not to be used to imply or represent a specification or rating, of finished products shipped. Detailed, specific submittals can be created upon request. It is the responsibility of the customer to specify product accordingly to comply with local laws, codes, and ordinances.