

Meets the requirements of ASTM D 6164, Type I, Grade S


Features and Components

DynaFast 180 S is a base or ply sheet for use in mechanically fastened systems.

Fine Mineral Parting Agent: A fine material parting agent is applied to both sides of the product. This product does not have a surface finish and must be used in constructions that will provide protection from UV (ultraviolet light) and the elements.

High-Quality SBS Rubber and Asphalt Blend: Lends elasticity and flexibility to the sheet. The elongation and recovery properties allow the product to easily accommodate the continual expansion and contraction experienced on all roofs.

Polyester-Reinforced Mat: Polyester mat with bidirectional glass-scrim reinforcement offers robust tear strength and puncture resistance, allowing for high wind performance and an excellent hail rating. The sheet also exhibits strong dimensional stability and enhanced elongation.

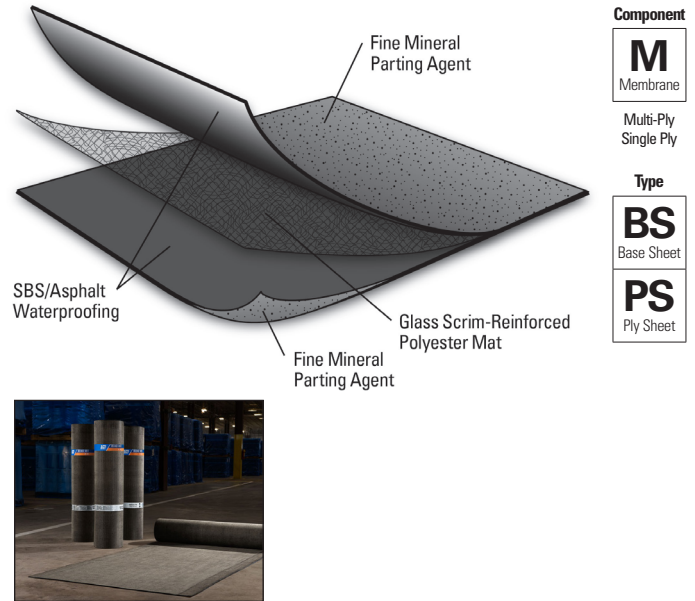

System Compatibility This product may be used as a component in the following systems. Please reference product application for specific installation methods and information.

Multi-Ply	BUR		APP		SBS				
	HA	CA	CA	HW	HA*	CA	HW	SA	MF
<i>Compatible with the selected multi-ply systems above</i>									

Single Ply	TPO				PVC			EPDM		
	MF	AD	SA	IW	MF	AD	IW	MF	AD	BA
<i>Do not use with single ply systems</i>										

Key: HA = Hot Applied CA = Cold Applied HW = Heat Weldable SA = Self Adhered MF = Mechanically Fastened IW = Induction Weld BA = Ballasted AD = Adhered
* Contact JM Technical Services for acceptable application regions.

Energy and the Environment

Pre-Consumer Recycled Content	0%
Post-Consumer Recycled Content	0%

Peak Advantage® Guarantee Information

Systems	Guarantee Term
When used in most 2-5 ply JM SBS systems.*	Up to 30 years

*Contact JM Technical Services for specific system requirements or guarantee terms.

Codes and Approvals



• FBC Approved

Installation/Application



- May be installed in Type III or Type IV asphalt, in an approved JM adhesive, or mechanically fastened
- When used in a mechanically fastened base sheet application, side and end laps must be installed using heat welding techniques
- Refer to JM SBS modified bitumen specifications and detail drawings for application and slope information

Packaging and Dimensions

Approximate Roll Coverage*	148 ft ² (14 m ²)
Roll Length	49' 2" (15 m)
Roll Width	39 3/8" (1 m)
Roll Weight	106 lb (48.1 kg)
Rolls per Pallet	20
Pallet Weight	2,270 lb (1,029.7 kg)
Pallets per Truck**	22
Producing Locations	Macon, GA Plattsburgh, NY South Gate, CA

*Roll net coverage rates are determined by the estimator or designee.
**Assumes 48' flatbed truck.

Meets the requirements of ASTM D 6164, Type I, Grade S

Tested Physical Properties

Physical Properties		ASTM Test Method	Standard for ASTM D 6164, Type I, Grade S (Min.)	DynaFast 180 S	
				MD*	XMD**
Strength	Tensile Tear	D 5147	55 lbf (245 N)	119 lbf (529 N)	93 lbf (414 N)
	Peak Load at 0°F (-18°C)	D 5147	70 lbf/in (12 kN/m)	118 lbf/in (20.7 kN/m)	81 lbf/in (14.2 kN/m)
	Peak Load at 73.4°F (23°C)	D 5147	50 lbf/in (8.8 kN/m)	88 lbf/in (15.4 kN/m)	57 lbf/in (10.0 kN/m)
Longevity	Low Temp. Flexibility	Unconditioned	0°F (-18°C)	-20°F (-29°C)	
		90-Day Heat Conditioned	0°F (-18°C)	-20°F (-29°C)	
	Compound Stability	D 5147	215°F (102°C)	250°F (121°C)	
	Thickness	D 5147	85 mil (2.2 mm)	98 mil (2.5 mm)	
	Elongation at Peak Load at 0°F (-18°C)	D 5147	20%	49%	45%
	Elongation at Peak Load at 73.4°F (23°C)	D 5147	35%	53%	65%
	Ultimate Elongation at 73.4°F (23°C)	D 5147	38%	59%	71%
Aged Performance	90-Day Heat-Conditioned Peak Load at 0°F (-18°C)	D 5147	70 lbf/in (12 kN/m)	105 lbf/in (18.4 kN/m)	84 lbf/in (14.7 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at 0°F (-18°C)	D 5147	20%	40%	45%
	90-Day Heat-Conditioned Peak Load at 73.4°F (23°C)	D 5147	50 lbf/in (8.8 kN/m)	104 lbf/in (18.2 kN/m)	64 lbf/in (11.2 kN/m)
	90-Day Heat-Conditioned Elongation at Peak Load at 73.4°F (23°C)	D 5147	35%	52%	56%
	90-Day Heat-Conditioned Ultimate Elongation at 73.4°F (23°C)	D 5147	38%	53%	59%
Installation	Dimensional Stability	D 5147	1.0%	-0.2%	0.7%
	Net Mass per Unit Area	D 146	54 lb/100 ft² (24 kg/9.29 m²)	62 lb/100 ft² (28 kg/9.29 m²)	
	Roll Weight	D 146	N/A	106 lb (48 kg)	

*MD = Machine Direction

**XMD = Cross-Machine Direction

Note: All data represents tested values.

Supplemental Testing

Physical Properties		ASTM Test Method	DynaFast 180 S Result
Cyclic Joint Displacement	Initial	D 5849	Pass at 500 cycles*
	After 90-Day Heat Conditioning per ASTM D 5147	D 5849	Pass at 200 cycles*

*In a min 2-ply system when adhered with any combination of cold applied, hot applied and or heat-weld that is approved by JM for application.

Technical specifications as shown in this literature are intended to be used as general guidelines only. Please refer to the Safety Data Sheet and product label prior to using this product. The Safety Data Sheet is available by calling (800) 922-5922 or on the web at www.jm.com/ roofing. The physical and chemical properties of the product listed herein represent typical, average values obtained in accordance with accepted test methods and are subject to normal manufacturing variations. They are supplied as a technical service and are subject to change without notice. Check with the regional sales representative nearest you for current information.

All Johns Manville products are sold subject to Johns Manville's standard Terms and Conditions, which includes a Limited Warranty and Limitation of Remedy. For a copy of the Johns Manville standard Terms and Conditions or for information on other Johns Manville roofing products and systems, visit www.jm.com/terms-conditions.