


## Mechanically Fastened and Fully Adhered Details

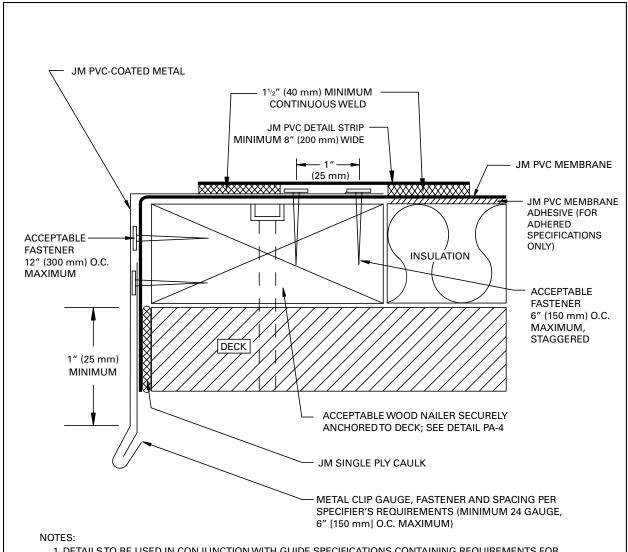

- 1. DETAILS TO BE USED IN CONJUNCTION WITH GUIDE SPECIFICATIONS CONTAINING REQUIREMENTS FOR NAILERS, INSULATION, ETC.
- 2. FOR JM PVC-COATED METAL JOINT, SEE DETAIL PE-17.
- 3. PRECAUTIONS MUST BETAKENTO ENSURETHATTHE MINIMUM 6" (150 mm) WIDE MEMBRANE COVER STRIP IS NOT WELDED SOLID. A 2" (50 mm) WIDE UNWELDED AREA MUST BE MAINTAINED BETWEENTHETWO WELDED EDGES OF THE COVER STRIP.

DRAWING NO.	DRIP EDGE WITH COATED METAL			
PE-13	SCALE	ISSUE DATE	CAD	
	N.T.S.	3-06	PV13MEF	Johns Manville