


Mechanically Fastened and Fully Adhered Details

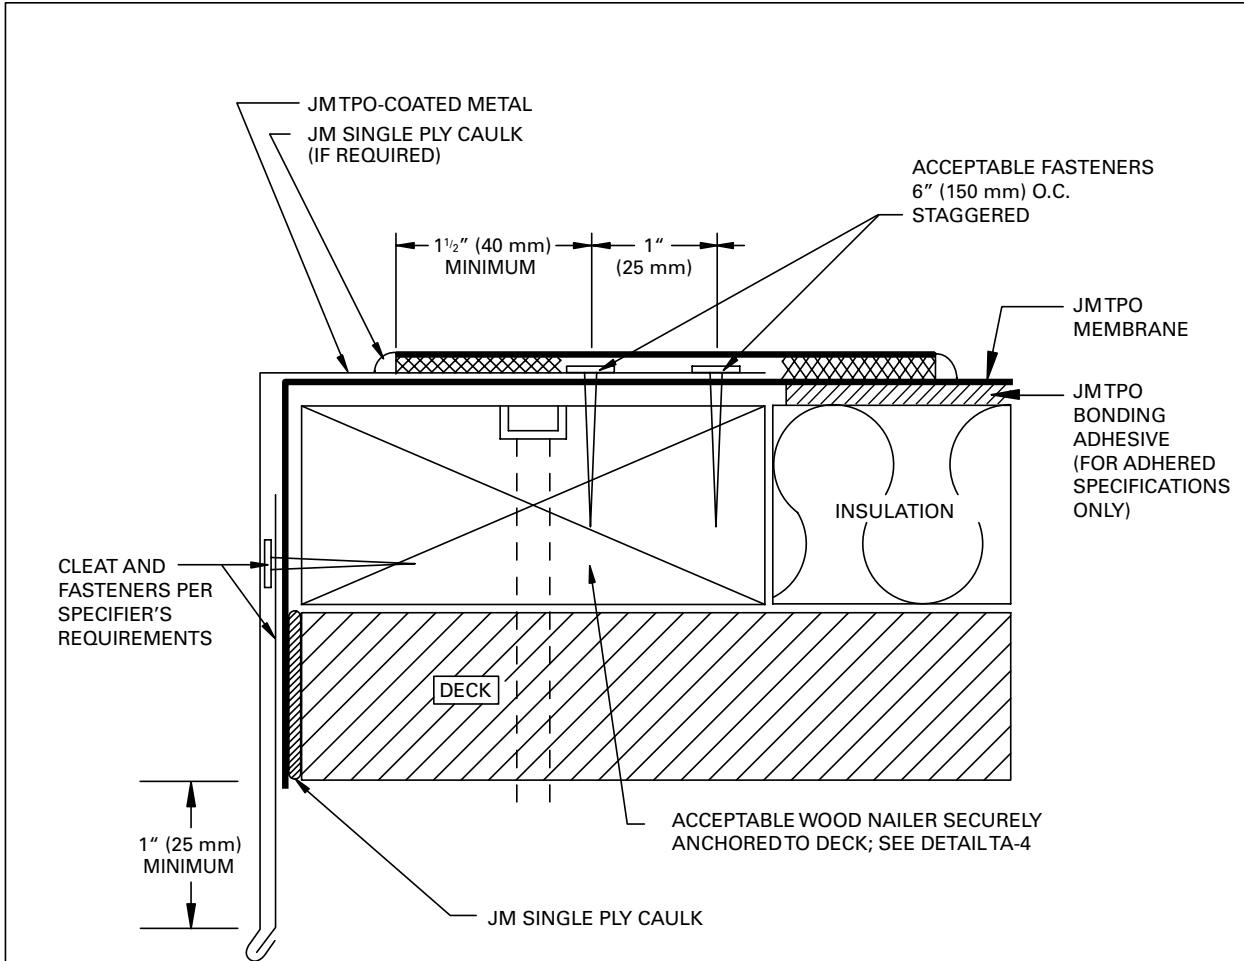

NOTES:

1. DETAILS TO BE USED IN CONJUNCTION WITH GUIDE SPECIFICATIONS CONTAINING REQUIREMENTS FOR NAILERS, INSULATION, ETC.
2. JM SINGLE PLY CAULK IS USED TO SEAL THE MEMBRANE EDGES WHERE REINFORCING FABRIC IS CUT AND EXPOSED. EDGE SEALANT IS REQUIRED ON ALL END LAPS, T-JOINTS, AND FIELD CUT EDGES.
3. FOR JM TPO-COATED METAL JOINT, SEE DETAIL TE-15.
4. INSULATION MUST BE COMPATIBLE WITH JM TPO BONDING ADHESIVE.

DRAWING NO. TE-13	DRIP EDGE - COATED METAL			
	SCALE N.T.S.	ISSUE DATE 3-06	CAD TPO-2.03	