

14-14

JM TPO SYSTEMS

SINGLE PLY ROOFING

DESIGNED FOR EFFICIENCY, DURABILITY AND LONGEVITY

JMTPO gives you a more cost-effective, yet highly reliable solution for your roofing projects. Our membranes are reinforced with a polyester fabric and manufactured with an ultraviolet-resistant thermoplastic polyolefin formulation. This combination provides you with extreme pliability, flexibility and weldability.

JOHNS MANVILLE

We launched our state-of-the-art TPO formulation in 2008, when many of our competitors already had products in the TPO market. While we felt pressure to meet ever-growing demands by getting into the market quickly, we determined it was more important to take the time to produce a higher-quality TPO product and do it right the first time.

QUALITY IS BUILT IN



Cost-effective



Durable



Efficient



Flexible



Withstands longterm weathering, is UV-resistant and resists heat-aging



Lays flat



Has one of the widest weld windows of any TPO on the market for commercial roofing, providing superior weldability



In 2010, we launched the very first

TPO Challenge and still continue to host
challenges today. Well over 1,000 contractors,
specifiers, consultants, welders and other
roofing professionals have taken part in nationwide
blind challenges to compare leading TPO membranes.
Among experienced welders, 70% of these professionals
selected JMTPO as their membrane of choice.

70%

selected JMTPO as their membrane of choice.

Those who regularly use TPO prefer JMTPO for:

- Wide weld window
- Seam strength
- Lay-flat properties
- Workability

60 MIL WHITE TPO: REAL-WORLD TESTED, REAL-WORLD PROVEN

In 2015, we started a program to research the real-world performance of our TPO membranes. We partnered with our trusted owners and contractors to perform roof cuts in various locations all across the United States. A third party tested the material against various ASTM requirements, and the results tell the great JMTPO story.



_	GROVE CITY OH		ASTM	
	Thickness	57 mil	-	
	Seam Strength	116 lbf	4,5	
YEARS	Brittleness Point	Pass	1/5	

	FARMERS BRAN	CH TX	ASTM
h	Thickness	56 mil	45
U	Seam Strength	119 lbf	455
YEARS	Brittleness Point	Pass	1,550

	HOUSTON TX	ASTM		
h	Thickness	58 mil	1	
U	Seam Strength	111 lbf	45	
YEARS	Brittleness Point	Pass	100	

115 lbf

Pass

Brittleness Point

"The guys like how they can take the membrane in tight at the angle change from the roof to the wall. So it's a very forgiving sheet and a high-quality sheet that we are getting nice feedback from the field."

Jack Scalo President/CEO Burns & Scalo

JMTPO

CONTINUES TO BE THE TOP CHOICE FOR CONTRACTORS STILL TODAY

The JMTPO Challenge keeps demonstrating that contractors still stand by JMTPO as the most flexible, smoothest and most weldable sheet.

Roofing

FLEXIBLE

Better for angle changes and working around penetrations

- Saves you time by achieving tighter fit at angle changes for more precise, detailed cuts
- Handles colder temperatures better
- Creates better laps by laying flat

Consistent welding lets you work in optimum conditions and the harshest environments

- Strong, consistent and proven seam strength, lap to lap
- A wider weld window can prevent cold welds and false welds

SMOOTH

Smoother sheets make compliance for initial reflectivity easier

- Smooth membranes hold on to less dirt
- Maintains reflective advantage longer with smoother surfaces


"The weldability of the product, the quality of the sheet itself and all the accessories that are produced are the best in the industry. And that's from the guys in the field."

John Kalkreuth

Kalkreuth Roofing & Sheet Metal

The lighter-colored JMTPO reflects solar energy to lower the amount of heat absorbed into the building, greatly reducing air-conditioning energy loads and costs.

White JMTPO membrane meets the stringent requirements for both LEED® (Leadership in Energy and Environmental Design) and California Title 24 when tested by the CRRC® (Cool Roof Rating Council).

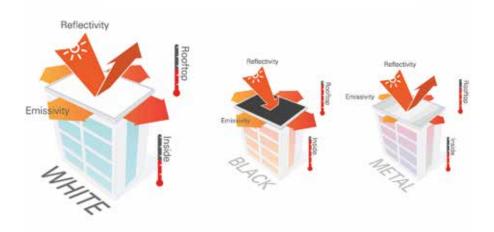





Between 2011 and 2013, JM's Scottsboro, Alabama roofing facility reduced its waste by 85 percent. In 2014, waste disposal at this plant was nearly half of what it was in 2013. Our Scottsboro plant continues to employ a stringent recycling program to minimize waste as it has since the launch of this program in 2011.









"I was confident we would realize a cost savings on the first install using 12-foot rolls, and we did."

Jess Spain, Vice President, Great Lakes Roofing

MORE OPTIONS TO MAKE YOU MORE PROFIT

12' WIDE ROLLS

We recently opened a second production line for our newest offerings—12' wide and 6' wide sheets. Contractors working on commercial projects now have even more flexibility and choices with JMTPO. The 12' wide sheets give contractors the opportunity to save time with fewer field seams, less crane time and less waste. JMTPO 12' and 6' sheets are available in all thicknesses: 45, 60 and 80 mils.







SELF-ADHERED

JMTPO SA (Self-Adhered) membranes can be installed up to three times faster than a traditional fully adhered application through the "peel and stick" technology of our factory-applied adhesive. TPO SA works great for installations that require little to no VOCs and may also have fewer weather restrictions than many traditional adhesive systems. JMTPO SA starts strong and stays strong for the full life of the roof.





Our financial strength allows us to provide some of the strongest and most comprehensive guarantees in the roofing industry.

We offer roofing warranties and 10-, 15-, 20-, 25- and 30-year No Dollar Limit (NDL) roofing guarantees, depending on the roof system selected. Even if you never have cause to fall back on the JM Peak Advantage® Guarantee, Johns Manville Roofing Systems provide you with additional value by offering technical assistance to the building owner throughout the life of the agreement.



FIND THE RIGHT JM TPO ROLLS FOR YOUR NEXT PROJECT

COLOR	THICKNESS	ROLL SIZE	MATERIAL ID	PACKAGING	WEIGHT	COVERAGE
		12' x 100'	90026094		341 lb/roll	1,200 ft ²
		10' x 100'	90001399		284 lb/roll	1,000 ft ²
	45 MIL	8' x 100'	90001398	9 rolls/pallet	224 lb/roll	800 ft ²
		6' x 100'	90026093	-	171 lb/roll	600 ft ²
		5' x 100'	90001397		142 lb/roll	500 ft ²
		12' x 100'	90026096		430 lb/roll	1,200 ft ²
		10' x 100'	90001408	-	357 lb/roll	1,000 ft ²
	60 MIL	8' x 100'	90001407	8 rolls/pallet	290 lb/roll	800 ft ²
		6' x 100'	90026095	-	216 lb/roll	600 ft ²
		5' x 100'	90001406		178 lb/roll	500 ft ²
		10' x 100'	90013942		355 lb/roll	1,000 ft ²
=	60 MIL MIN	5' x 100'	90021710	8 rolls/pallet	173 lb/roll	500 ft ²
WHITE	FB 115	10' x 100'	90001694	7 rolls/pallet	385 lb/roll	1,000 ft ²
	FB 150 (Hot Moppable)	10' x 75'	90024979	7 rolls/pallet	355 lb/roll	750 ft ²
		10' x 100'	90025037		396 lb/roll	1,000 ft ²
	TPO SA 60 MIL	5' x 100'	90025229	- 8 rolls/pallet	198 lb/roll	500 ft ²
		12' x 75'	90026695		442 lb/roll	900 ft ²
		10' x 100'	90029673	-	491 lb/roll	750 ft²
	80 MIL	8' x 100'	90029784	8 rolls/pallet	393 lb/roll	600 ft ²
		6' x 75'	90026694		221 lb/roll	450 ft ²
		5' x 100'	90029783	-	245 lb/roll	375 ft²
	FB 135	10' x 50'	90001558	8 rolls/pallet	284 lb/roll	500 ft ²
	FB 175 (Hot Moppable)	10' x 50'	90025016	8 rolls/pallet	224 lb/roll	500 ft ²
		10' x 100'*	90001393	9 rolls/pallet 8 rolls/pallet	284 lb/roll	1,000 ft ²
	45 MIL	8' x 100'*	90001392		224 lb/roll	800 ft ²
	60 MIL	5' x 100'*	90001391		142 lb/roll	500 ft ²
		12' x 100'**	90026691		414 lb/roll	1,200 ft ²
		10' x 100'**	90001402		345 lb/roll	1,000 ft ²
<u>>-</u>		8' x 100'*	90001401		275 lb/roll	800 ft ²
		6' x 100'*	90026690		208 lb/roll	600 ft ²
		5' x 100'**	90001400		173 lb/roll	500 ft ²
	FB 115	10' x 100'*	90014106	7 rollo/pollot	385 lb/roll	1,000 ft ²
	FB IIS	10' x 75'*		7 rolls/pallet	369 lb/roll	750 ft ²
	OO MII	8' x 75'*	90001411	8 rolls/pallet	295 lb/roll	600 ft ²
	80 MIL	5' x 75'*	90001410		184 lb/roll	375 ft ²
			90001409			
	45 MIL	10' x 100'*	90001396	9 rolls/pallet	284 lb/roll	1,000 ft ²
		8' x 100'*	90001395		224 lb/roll	800 ft ²
		5' x 100'*	90001394		142 lb/roll	500 ft ²
	60 MIL	12' x 100'**	90026693	8 rolls/pallet	414 lb/roll	1,200 ft ²
		10' x 100'**	90001405		345 lb/roll	1,000 ft ²
TAN		8' x 100'*	90001404		275 lb/roll	800 ft ²
		6' x 100'*	90026692		208 lb/roll	600 ft ²
		5' x 100'**	90001403		173 lb/roll	500 ft ²
	FB 115	10' x 100'*	90013979	7 rolls/pallet	385 lb/roll	1,000 ft ²
	80 MIL	10' x 75'*	90001414		369 lb/roll	750 ft²
		8' x 75'*	90001413	8 rolls/pallet 29	295 lb/roll	600 ft ²



Johns Manville offers one of the most comprehensive guarantees in the roofing industry. That's the advantage you can expect from a financially stable, dependable leader that has been around for over 160 years.



717 17th St.
Denver, CO 80202
(800) 922-5922
www.jm.com/roofing



@JohnsManvilleRoofing



@JMRoofingSystem



Johns Manville Commercial Roofing Systems



@JohnsManvilleRoofing



Above it all



Johns Manville Roofing Systems



www.jmroofing.news

