



Data Sheet

CI-EBT-DS

06-17

# **Elevated Temperature Batt 1000° and HD Blanket 1000°**

*with ECOSE® Technology*



# Elevated Temperature Batt 1000° and HD Blanket 1000°

with ECOSE® Technology

## DESCRIPTION

Knauf Insulation ET Batt 1000° and Knauf Insulation ET HD Blanket 1000° with ECOSE® Technology are semi-rigid thermal insulations (1.6 PCF, 25.6 kg/m<sup>3</sup>) bonded with ECOSE Technology.

## ECOSE® TECHNOLOGY

ECOSE Technology is a revolutionary binder chemistry that enhances the sustainability of our products. The “binder” is the bond that holds our glass mineral wool product together and gives the product its shape and brown color. ECOSE Technology is a plant-based, sustainable chemistry that replaces the phenol/formaldehyde (PF) binder traditionally used in glass mineral wool products. Products using ECOSE Technology are formaldehyde-free and have reduced global warming potential when compared to our products of the past.

## APPLICATION

Knauf Insulation ET Batt 1000° and Knauf Insulation ET HD Blanket 1000° with ECOSE Technology are used in high-temperature marine applications, industrial furnaces, boilers, vessels and industrial ovens, where lighter-weight insulation is needed or flexible and/or semi-rigid high-temperature insulations are needed for irregular surfaces.

## PRODUCT FEATURES

- Low thermal conductivity
- Increase system efficiency and decrease fuel usage
- Lightweight, easy to handle and fabricate
- Flexibility makes them ideal for flat or irregular surfaces
- More resistant to abuse than standard ET blankets
- Tough and resilient, resists damage in shipment and during and after installation
- All items are available in made-to-order sizes.
- Low emitting for indoor air quality considerations

## SUSTAINABILITY

Knauf Insulation’s products used for thermal insulating purposes recover the energy that it took to make them in just hours or days, depending on the application. Once installed, the product continues to save energy and reduce

carbon generation as long as it is in place. Glass mineral wool insulation with ECOSE Technology contains three key ingredients:

- Recycled glass content, verified every six months by UL Environment
- Sand, one of the world’s most abundant resources
- Our green chemistry initiative ECOSE Technology, which is validated to be formaldehyde-free

## SPECIFICATION COMPLIANCE

### In U.S.

- ASTM C553, Type I, II, V, VI
- HH-I-558C; Form B, Type I, Class 7, 8
- USCG 164/109/18/1
- ASTM C1139 Type I Grade 3, Type 2 Grade 3
- Conforms to Marine Equipment European 1408/13

- MIL-I-24244
- NRC Reg. Guide 1.36. (Certification needs to be specified at time of order)

### In Canada

- CAN/ULC S102
- CGSB 51-GP-11M

## PRODUCT FEATURES

- UL Environment
  - GREENGUARD Certified
  - GREENGUARD Gold Certified
  - Validated to be formaldehyde-free
  - UL/ULC Classified (UL 723)
- Complies with Oregon Revised Statute 453.085 and contains less than 0.10% decabromdiphenyl ether (DecaBDE) by mass
- Tested and certified to meet all requirements of EUCEB

## APPLICATION & SPECIFICATION GUIDELINES

### Precautions

- During initial heat-up to operating temperatures above 350°F (177°C), a slight odor and some smoke may be given off as a portion of the bonding material used in the insulation begins to undergo a controlled decomposition.
- If natural convection is not adequate in confined areas, forced ventilation should be provided in order to protect against any harmful fumes and vapors that might be generated.

## Storage

- Protect material from water damage or other abuse. Protect from welding sparks and open flame. The material may be stored outside if the packaging is not damaged.

## Preparation

- Apply the product on clean, dry surfaces.

## Application

- There is no heat-up cycle required for Knauf ET Batt 1000° and Knauf ET HD Blanket 1000°.
- The product should be secured with welded pins or studs and covered with sheet metal. An alternate method entails covering the insulation with a metal mesh and insulating cement, canvassing and painting.
- Pins and studs shall be located a maximum of 4" (102 mm) from each edge and spaced no greater than 16" (406 mm) on center.
- Care should be taken to avoid over compressing the insulation with the retaining washer.
- For application of Knauf Insulation ET Batt 1000° and Knauf ET HD Blanket 1000° over 500° F (260° C), double layer application is recommended with staggered joints.
- When using the products at 1000° F (538° C), it is recommended that no more than 6" (152 mm) thickness should be used. For thicknesses in excess of 6", contact your Knauf Insulation Territory Manager.

## CAUTION

Glass mineral wool may cause temporary skin irritation. Wear long-sleeved, loose-fitting clothing, head covering, gloves and eye protection when handling and applying material. Wash with soap and warm water after handling. Wash work clothes separately and rinse washer. A disposable mask designed for nuisance type dusts should be used where sensitivity to dust and airborne particles may cause irritation to the nose or throat.

## GLASS MINERAL WOOL AND MOLD


Glass mineral wool insulation will not sustain mold growth. However, mold can grow on almost any material when it becomes wet and contaminated. Carefully inspect any insulation that has been exposed to water. If it shows any sign of mold it must be discarded. If the material is wet but shows no evidence of mold, it should be dried rapidly and thoroughly. If it shows signs of facing degradation from wetting, it should be replaced.

## NOTES

The chemical and physical properties of Knauf ET Batt 1000° and Knauf ET HD Blanket 1000° with ECOSE® Technology represent typical average values determined in accordance with accepted test methods. The data is subject to normal manufacturing variations. The data is supplied as a technical service and is subject to change without notice. References to numerical flame spread ratings are not intended to reflect hazards presented by these or any other materials under actual fire conditions.

Check with your Knauf Insulation Territory Manager to ensure information is current.

## Thermal Efficiency | ASTM C177

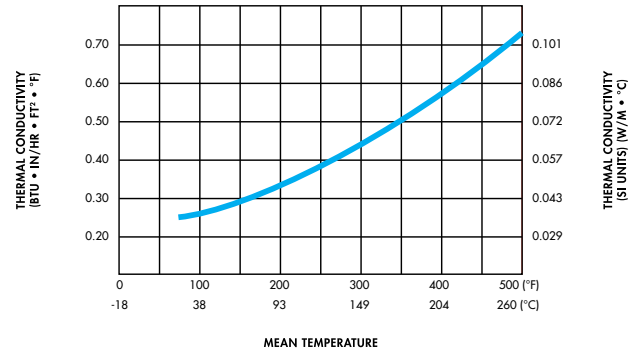

Mean Temperature	k	k(SI)
100° F (38° C)	0.24	0.035
200° F (93° C)	0.33	0.048
300° F (149° C)	0.44	0.063
400° F (204° C)	0.57	0.082
500° F (260° C)	0.72	0.104

## Technical Data

Property (Unit)	Test	Performance
Corrosiveness	ASTM C665	Does not accelerate corrosion of steel
Corrosion	ASTM C1617	Pass
Water Vapor Sorption (by volume)	ASTM C1104	0.1% or less
Maximum Service Temperature	ASTM C411	1000° F (538° C)
Mold Growth	ASTM C1338	Pass
Surface Burning Characteristics (flame spread/smoke developed)	ASTM E84, NFPA 255, NFPA 90A and 90B, UL 723, CAN/ULC S102	25/50

### ET Batt 1000° Forms Available

Thickness	Width	Length
1½" (38 mm)	24" (610 mm)	48" (1,219 mm)
2" (51 mm)		
2½" (64 mm)		
3" (76 mm)		
3½" (89 mm)		
4" (102 mm)		

### HD Blanket 1000° Forms Available

Thickness	Width	Length
1½" (38 mm)	48" (1,219 mm)	120' (36.6 m)
2" (51 mm)		80' (24.4 m)
2½" (64 mm)		70' (21.3 m)
3" (76 mm)		60' (18.3 m)
3½" (89 mm)		50' (15.2 m)
4" (102 mm)		40' (12.2 m)

# KNAUFINSULATION



Knauf Insulation, Inc.  
One Knauf Drive  
Shelbyville, IN 46176

Sales	(800) 825-4434, ext. 8485
Technical Support	(800) 825-4434, ext. 8727
Information	info.us@knaufinsulation.com
Website	www.knaufinsulation.us

© 2017 Knauf Insulation, Inc.



**UL Environment GREENGUARD Certification Program**  
Elevated Temperature Batt 1000® and HD Blanket 1000® is certified to UL Environment GREENGUARD standards for low chemical emissions into indoor air during product usage.

**UL Environment GREENGUARD Gold Certification Program**  
Knauf Insulation has achieved UL Environment GREENGUARD Gold Certification for Elevated Temperature Batt 1000® and HD Blanket 1000®.

**UL Environment Validated Formaldehyde Free**  
Knauf Insulation has achieved UL Environment validation that Elevated Temperature Batt 1000® and HD Blanket 1000® is formaldehyde free.

For more information, visit [ul.com/spot](http://ul.com/spot)

**LEED Eligible Product**  
Use of this product may help building projects meet green building standards as set by the Leadership in Energy and Environmental Design (LEED) Green Building Rating System.


**LEED v2009**  
MR Credit 4.1 - 4.2 Recycled Content  
MR Credit 5.1 - 5.2 Regional Materials

**LEED v4**  
Knauf Insulation offers several products for both envelope and mechanical systems that have ingredient disclosure and transparency. Please contact [transparency@knaufinsulation.com](mailto:transparency@knaufinsulation.com) for products that currently contribute to MR credits.

Versions of this product have surface burning characteristics that are classified by Underwriters Laboratories and therefore subject to auditing for fire performance compliance.



This product has been tested and is certified to meet the EUCEB requirements.



This product has been tested and is certified to meet the US Coast Guard requirements.

This product is covered by one or more U.S. and/or other patents. See patent [www.knaufinsulation.us/patents](http://www.knaufinsulation.us/patents)