

# PANEL SIDING

## Cedar Texture

### Products:

- LP® SmartSide® 38 Series 8" o.c. Panel
- LP® SmartSide® 38 Series No Groove Shiplap Edge (NGSL) Panel
- LP® SmartSide® 38 Series No Groove Square Edge (NGSE) Dual Use Siding and Soffit Panel
- LP® SmartSide® ExpertFinish® 38 Series No Groove Square Edge (NGSE) Dual Use Siding and Soffit Panel (see p. 66 for details)

### DESIGNED & RATED FOR EXTERIOR USE

May be attached direct to studs; see application instructions for fastening and installation requirements  
No Groove panels can be installed vertically or horizontally; grooved panels are designed for vertical installation only  
Rated for structural use by APA

### Substrate:

- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
- Made using LP's proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay



### Sustainability Info:

- ASTM-Verified Carbon Negative
- Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



Pair our No Groove Panels with LP® SmartSide® trim for board & batten style applications

### Application Instructions:

LPCorp.com/Literature




## 38 Series Panel - Cedar Texture

3/8" Nominal Thickness  
**Primed:**  
8" o.c. Panel: 6' | 7' | 8' | 9' | 10' | 12'  
NGSL Panel: 8' | 9' | 10'  
NGSE Dual Use Siding and Soffit Panel: 8'

### Primed Specifications and PIDs:

PRODUCT	THICKNESS	WEIGHT
All products	0.354 in. (9 mm)	1.5 PSF




PRODUCT	LENGTH	GROOVE	GROOVE WIDTH	ACTUAL WIDTH	MAX SPAN RATING	PID
38 Series Cedar Texture 8" o.c. Panel	6 ft. (72 in.) (1.8 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1234 mm)	16 in. o.c.	27805
	7 ft. (84 in.) (2.1 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1234 mm)	16 in. o.c.	27806
	8 ft. (96 in.) (2.4 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1234 mm)	16 in. o.c.	25840
	9 ft. (108 in.) (2.7 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1234 mm)	16 in. o.c.	25843
	10 ft. (120 in.) (3.0 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1234 mm)	16 in. o.c.	25844
38 Series Cedar Texture No Groove Shiplap Edge (NGSL) Panel**	12 ft. (144 in.) (3.7 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1234 mm)	16 in. o.c.	25845
	8 ft. (96 in.) (2.4 m)	No Groove	N/A	48.56 in. (1234 mm)	16 in. o.c.	25855*
	9 ft. (108 in.) (2.7 m)	No Groove	N/A	48.56 in. (1234 mm)	16 in. o.c.	29189*
38 Series Cedar Texture No Groove Square Edge (NGSE) Dual Use Siding and Soffit Panel** ★	10 ft. (120 in.) (3.0 m)	No Groove	N/A	48.56 in. (1234 mm)	16 in. o.c.	25825*
	8 ft. (96 in.) (2.4 m)	No Groove	N/A	47.81 in. (1214 mm)	16 in. o.c. Siding 24 in. o.c. Soffit	41044


★ Can be used in siding or soffit applications

\*Special order item. Requires minimum quantity and extended lead times.  
\*\*Coordinates with LP® SmartSide® Trim for board and batten style applications.


### 38 SERIES CEDAR TEXTURE PANEL 8" O.C.




### GROOVE DETAIL



### 38 SERIES CEDAR TEXTURE PANEL - NO GROOVE SHIPLAP EDGE



### 38 SERIES CEDAR TEXTURE - NO GROOVE DUAL USE SIDING AND SOFFIT PANEL




All graphics are for illustrative purposes only.  
Metric units are rounded. PSF = Pounds Per Square Foot

# PANEL SIDING

## Cedar Texture


### ExpertFinish® Color Specifications and PIDs:

38 SERIES CEDAR TEXTURE – NO GROOVE  
DUAL USE SIDING AND SOFFIT PANEL

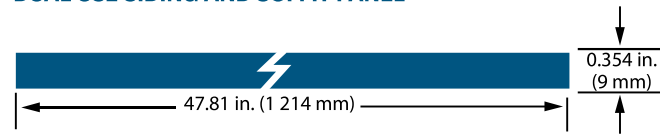

### 38 Series Panel - Cedar Texture

3/8" Nominal Thickness  
Prefinished - NGSE Dual Use  
Siding and Soffit Panel: 8' | 10'



Pair with LP® SmartSide®  
trim for board & batten  
style applications

PRODUCT	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	WEIGHT
38 Series Cedar Texture No Groove Square Edge (NGSE) Dual Use Siding and Soffit Panel* ★	47.81 in. (1214 mm)	0.354 in. (9 mm)	16 in. o.c. Siding 24 in. o.c. Soffit	1.5 PSF

COLOR	LENGTH	PID
Snowscape White	8 ft. (96 in.) (2.4 m)	47097
	10 ft. (120 in.) (3.0 m)	47082
Sand Dunes	8 ft. (96 in.) (2.4 m)	47098
	10 ft. (120 in.) (3.0 m)	47083
Desert Stone	8 ft. (96 in.) (2.4 m)	47099
	10 ft. (120 in.) (3.0 m)	47084
Quarry Gray	8 ft. (96 in.) (2.4 m)	47100
	10 ft. (120 in.) (3.0 m)	47085
Prairie Clay	8 ft. (96 in.) (2.4 m)	47101
	10 ft. (120 in.) (3.0 m)	47086
Terra Brown	8 ft. (96 in.) (2.4 m)	47102
	10 ft. (120 in.) (3.0 m)	47087
Harvest Honey	8 ft. (96 in.) (2.4 m)	47103
	10 ft. (120 in.) (3.0 m)	47088
Timberland Suede	8 ft. (96 in.) (2.4 m)	47104
	10 ft. (120 in.) (3.0 m)	47089

COLOR	LENGTH	PID
Garden Sage	8 ft. (96 in.) (2.4 m)	47105
	10 ft. (120 in.) (3.0 m)	47090
Redwood Red	8 ft. (96 in.) (2.4 m)	47106
	10 ft. (120 in.) (3.0 m)	47091
Tundra Gray	8 ft. (96 in.) (2.4 m)	47107
	10 ft. (120 in.) (3.0 m)	47092
Summit Blue	8 ft. (96 in.) (2.4 m)	47108
	10 ft. (120 in.) (3.0 m)	47093
Rapids Blue	8 ft. (96 in.) (2.4 m)	47109
	10 ft. (120 in.) (3.0 m)	47094
Cavern Steel	8 ft. (96 in.) (2.4 m)	47110
	10 ft. (120 in.) (3.0 m)	47095
Midnight Shadow	8 ft. (96 in.) (2.4 m)	47111
	10 ft. (120 in.) (3.0 m)	47096
Abyss Black	8 ft. (96 in.) (2.4 m)	47112
	10 ft. (120 in.) (3.0 m)	47081

★ Can be used in siding or soffit applications

\*Coordinates with LP® SmartSide® Trim for board and batten style applications.

All graphics are for illustrative purposes only.  
See LPCorp.com for product, warranty, and installation details. Metric units are rounded. PSF = Pounds Per Square Foot  
All colors shown are representative and may not be an exact match.



LP® SmartSide® ExpertFinish® Panel and Trim (Board & Batten Style) in Cavern Steel and Snowscape White; Lap in Cavern Steel; Trim in Abyss Black

# PANEL SIDING

## Brushed Smooth

### Products:

LP® SmartSide® 38 Series No Groove Square Edge (NGSE) Dual Use Siding and Soffit Panel

LP® SmartSide® ExpertFinish® 38 Series No Groove Square Edge (NGSE) Dual Use Siding and Soffit Panel

### DESIGNED & RATED FOR EXTERIOR USE

May be attached direct to studs; see application instructions for fastening and installation requirements  
Can be installed vertically or horizontally  
Rated for structural use by APA

### Substrate:

- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
- Made using LP's proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay




### Sustainability Info:

- ASTM-Verified Carbon Negative
- Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



## 38 Series Panel - Brushed Smooth

3/8" Nominal Thickness  
Primed - NGSE Dual Use  
Siding & Soffit Panel: 8' | 10'

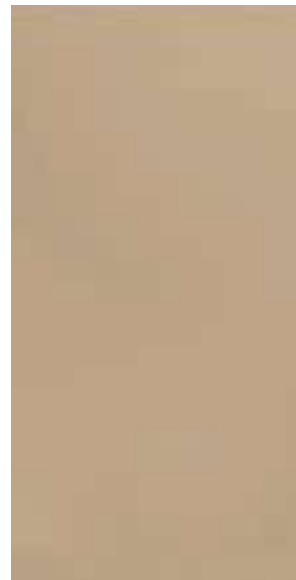


### Application Instructions:

LPCorp.com/Literature



### Primed Specifications and PIDs:

#### 38 SERIES BRUSHED SMOOTH DUAL USE SIDING AND SOFFIT PANEL



PRODUCT	LENGTH	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	WEIGHT	PID
38 Series Brushed Smooth No Groove Square Edge (NGSE) Dual Use Siding and Soffit Panel** ★	8 ft. (96 in.) (2.4 m)	47.81 in. (1214 mm)	0.354 in. (9 mm)	16 in. o.c. Siding 24 in. o.c. Soffit	1.5 PSF	46008*
	10 ft. (120 in.) (3.0 m)	47.81 in. (1214 mm)	0.354 in. (9 mm)	16 in. o.c. Siding 24 in. o.c. Soffit	1.5 PSF	46650*

★ Can be used in siding or soffit applications

\*Special order item; Requires minimum quantity and extended lead times.

\*\*Coordinates with LP® SmartSide® Trim for board and batten style applications.

## 38 Series Panel - Brushed Smooth

3/8" Nominal Thickness  
Prefinished - NGSE Dual Use  
Siding & Soffit Panel: 8' | 10'

### ExpertFinish® Color Specifications and PIDs:



PRODUCT	ACTUAL WIDTH	THICKNESS	MAX SPAN RATING	WEIGHT
38 Series Brushed Smooth No Groove Square Edge (NGSE) Dual Use Siding and Soffit Panel* ★	47.81 in. (1214 mm)	0.354 in. (9 mm)	16 in. o.c. Siding 24 in. o.c. Soffit	1.5 PSF


COLOR	LENGTH	PID
Snowscape White	8 ft. (96 in.) (2.4 m)	45893
	10 ft. (120 in.) (3.0 m)	46655
Sand Dunes	8 ft. (96 in.) (2.4 m)	45892
	10 ft. (120 in.) (3.0 m)	46656
Desert Stone	8 ft. (96 in.) (2.4 m)	45884
	10 ft. (120 in.) (3.0 m)	46664
Quarry Gray	8 ft. (96 in.) (2.4 m)	45889
	10 ft. (120 in.) (3.0 m)	46659
Prairie Clay	8 ft. (96 in.) (2.4 m)	45888
	10 ft. (120 in.) (3.0 m)	46660
Terra Brown	8 ft. (96 in.) (2.4 m)	45968
	10 ft. (120 in.) (3.0 m)	46653
Harvest Honey	8 ft. (96 in.) (2.4 m)	45886
	10 ft. (120 in.) (3.0 m)	46662
Timberland Suede	8 ft. (96 in.) (2.4 m)	45896
	10 ft. (120 in.) (3.0 m)	46652

COLOR	LENGTH	PID
Garden Sage	8 ft. (96 in.) (2.4 m)	45885
	10 ft. (120 in.) (3.0 m)	46663
Redwood Red	8 ft. (96 in.) (2.4 m)	45891
	10 ft. (120 in.) (3.0 m)	46657
Tundra Gray	8 ft. (96 in.) (2.4 m)	45897
	10 ft. (120 in.) (3.0 m)	46651
Summit Blue	8 ft. (96 in.) (2.4 m)	45967
	10 ft. (120 in.) (3.0 m)	46654
Rapids Blue	8 ft. (96 in.) (2.4 m)	45966
	10 ft. (120 in.) (3.0 m)	46658
Cavern Steel	8 ft. (96 in.) (2.4 m)	45883
	10 ft. (120 in.) (3.0 m)	46665
Midnight Shadow	8 ft. (96 in.) (2.4 m)	45887
	10 ft. (120 in.) (3.0 m)	46661
Abyss Black	8 ft. (96 in.) (2.4 m)	45882
	10 ft. (120 in.) (3.0 m)	46666

★ Can be used in siding or soffit applications

\*Coordinates with LP® SmartSide® Trim for board and batten style applications.

#### 38 SERIES BRUSHED SMOOTH DUAL USE SIDING AND SOFFIT PANEL

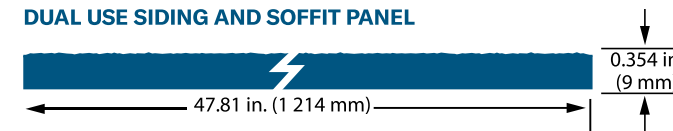

Pair with LP® SmartSide® trim for board & batten style applications

# PANEL SIDING

## Cedar Texture

### Products:

- LP® SmartSide® 76 Series 8" o.c. Panel
- LP® SmartSide® 76 Series No Groove Shiplap Edge Panel

### DESIGNED & RATED FOR EXTERIOR USE

May be attached direct to studs; see application instructions for fastening and installation requirements  
No Groove panels can be installed vertically or horizontally; grooved panels are designed for vertical installation only  
Rated for structural use by APA

### Substrate:

- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
- Made using LP's proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay



### Sustainability Info:

- ASTM-Verified Carbon Negative
- Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



Pair our No Groove Panels with LP® SmartSide® trim for board & batten style applications

### Application Instructions:

LPCorp.com/Literature




## 76 Series Panel - Cedar Texture

7/16" Nominal Thickness  
**Primed:**  
8" o.c.: 8' | 9' | 10'  
No Groove Shiplap Edge: 8' | 9' | 10'

### Primed Specifications and PIDs:


PRODUCT	THICKNESS	WEIGHT	MAX SPAN RATING
All products	0.418 in. (10.6 mm)	1.5 PSF	16 in. o.c.




PRODUCT	LENGTH	GROOVE	GROOVE WIDTH	ACTUAL WIDTH	PID
76 Series Cedar Texture Panel 8" o.c.	8 ft. (96 in.) (2.4 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1234 mm)	25848
	9 ft. (108 in.) (2.7 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1234 mm)	25850
	10 ft. (120 in.) (3.0 m)	8 in. o.c.	3/8 in. (10 mm)	48.56 in. (1234 mm)	25851
76 Series Cedar Texture Panel No Groove Shiplap Edge*	8 ft. (96 in.) (2.4 m)	No Groove	N/A	48.56 in. (1234 mm)	25856
	9 ft. (108 in.) (2.7 m)	No Groove	N/A	48.56 in. (1234 mm)	25857
	10 ft. (120 in.) (3.0 m)	No Groove	N/A	48.56 in. (1234 mm)	25858

\*Coordinates with LP® SmartSide® Trim for board and batten applications.


#### 76 SERIES CEDAR TEXTURE PANEL 8" O.C.

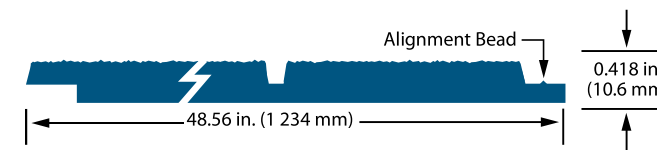

#### GROOVE DETAIL



#### 76 SERIES CEDAR TEXTURE PANEL - NO GROOVE SHIPLAP EDGE

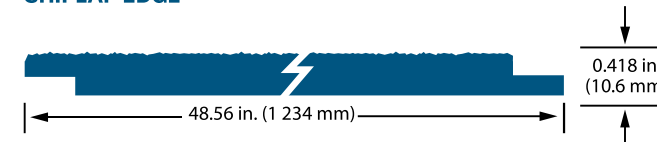

# PANEL SIDING

## Cedar Texture

### Product:

LP® SmartSide® 190 Series Siding Panel

### DESIGNED & RATED FOR EXTERIOR USE

May be attached direct to studs; see application instructions for fastening and installation requirements

Grooved panels are designed for vertical installation only

Rated for structural use by APA

### Substrate:

- Features engineered wood strand technology with precisely-sized, shaped, and layered wood strands from responsibly sourced logs
- Made using LP's proprietary SmartGuard® process, which includes industrial-grade resins, water-resistant waxes, zinc borate, and a resin-saturated overlay



### Sustainability Info:

- ASTM-Verified Carbon Negative
- Made with wood, a renewable resource, vetted through strict Sustainable Forestry Initiative® (SFI®) standards



### Application Instructions:


LPCorp.com/Literature



## 190 Series Panel - Cedar Texture

19/32" Nominal Thickness  
Primed: 8" o.c.: 8'

### Primed Specifications and PIDs:



PRODUCT	LENGTH	ACTUAL WIDTH	GROOVE	GROOVE WIDTH	THICKNESS	MAX SPAN RATING	WEIGHT	PID
190 Series Cedar Texture Panel 8" o.c.	8 ft. (96 in.) (2.4 m)	48.56 in. (1234 mm)	8 in. o.c.	3/8 in. (10 mm)	0.578 in. (14.7 mm)	24 in. o.c.	2 PSF	25852

### 190 SERIES CEDAR TEXTURE PANEL 8" O.C.

